


# Models 72909 IEC Insulated BNC (F) to stackable/retractable 4 mm



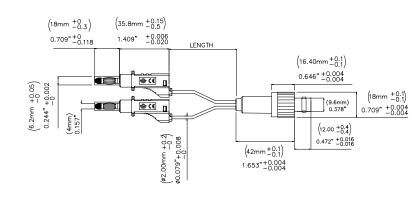

#### **Features**

- IEC Insulated BNC (F) to stackable/retractable 4 mm plugs
- Length 10in (25cm)

#### **Materials**

- Connector body: Nickel plated BrassCenter Contact: Gold Plated Brass
- Dielectric: White PTFE
- Plug spring: Nickel plated bronze Beryllium copper.
- Plug Body: Nickel plated Brass
- Insulation: NylonWire: Silicone

### Information

Model: 72909

## **Specifications**

Max Temperature	85°
Max Current	6A
Max Voltage	30 V AC / 70 V DC

**Rating:** hands free testing in controlled environment: 70Vrms max. For CE compliance: Not intended for handheld use at voltages above 33Vrms/70Vdc

**USA:** Sales: 800-490-2361 Technical Support: 800-241-

2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International**: 425-446-5500

e-mail: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>
Where to Buy: <a href="mailto:www.pomonaelectronics.com">www.pomonaelectronics.com</a>

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2004 1/24/06