


Model 5343 Retractable Sheath Banana To BNC Male

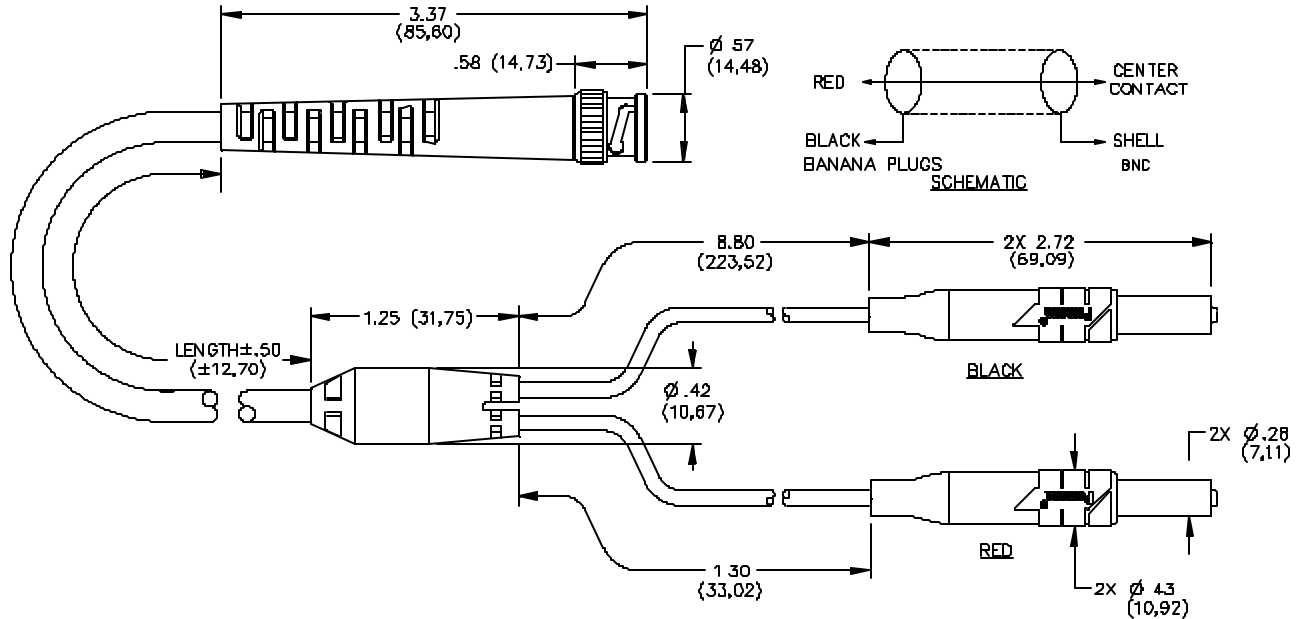

FEATURES:

- Retractable Sheath Banana Plug provided for use with older test equipment.

MATERIALS:

Conn: 1st End-Retractable sheath banana plug:

Spring: Beryllium Copper per QQ-C-533,

Cond. H.T.Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Plug Body: Brass Rod, per ASTM B16-85, Temper HO2. Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Tip: Nylon. Color matches color of wire.

Compression Spring: Stainless Steel 302.

Insulation: Nylon molded to plug body and wire.

Color matches color of wire.

Wire: 20 AWG stranding 41 x 36 T.C., PVC insulated, 2.21 (.087) O.D. Color: One Black and one Red.

Molded Breakout: PVC molded to breakout leads

and cable. Color: Black

Cable: Shielded coaxial RG58C/U, 4.95 (.195) O.D.

Color: Black. Marking: "POMONA 5343-C-XX". Conn: 2nd End-BNC Male Connector Body and fittings: Tarnish resistant. Center Contact: Gold plated per requirements of MIL-C-39012.

Strain Relief Boot: PVC molded to BNC plug and cable. Color: Black

RATINGS:

Environmental: Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: Shield-Earth: 30VAC/60VDC,

Inner Conductor-Shield: 500 VRMS Max.

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 5343-C-XX
XX=cable length, standard length: 12" (305), 24" (610), 36" (914), 48" (1219), 60" (1524) Ordering Example: 5343-C-60 (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EHLS

C:\Laura Goldberg\FlukeDataSheet\5343_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360

Technical Assistance: 800-241-2060

PomonaACCESS 90635 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 1