


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS
INSULATOR: HEAT SHRINK TUBING 221. BLACK.
BODY: BRASS, 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE, 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
2. P/N: 9210COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
END CAP: MACHINED DELRIN. WHITE.
FRAME: BRASS, NICKEL PLATED.
3. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

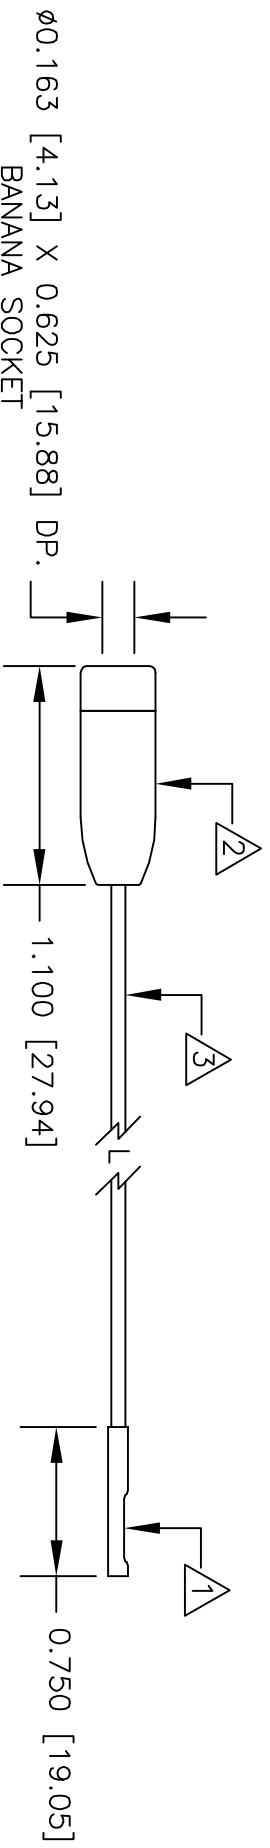

Ø0.163 [4.13] X 0.625 [15.88] DP.
BANANA SOCKET

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±		CONTRACT NO.		DESCRIPTION	
MATERIAL SEE NOTE.		APPROVALS		0.025 [0.64] SQ. SOCKET TO STD BAN SKT (9210)	
FINISH SEE NOTE.		DATE		SIZE CODE IDENT NO. DRAWING NO.	
APPLICATION USED ON		DRAWN R.L.		A 08505 9163	
DO NOT SCALE DRAWING		APPROVED BY		SCALE 1:1	
				SHEET 1 OF 1	

E-Z-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.