


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9260BLK
HOUSING: MOLDED NYLON,
FRAME: BRASS, NICKEL PLATED,
CONTACT: BeCu OR PHOSPHOR BRONZE, NICKEL
PLATED.
2. P/N: 9260RED
HOUSING: MOLDED NYLON,
FRAME: BRASS, NICKEL PLATED,
CONTACT: BeCu OR PHOSPHOR BRONZE, NICKEL
PLATED.
3. P/N: 9230
BODY & FITTINGS: BRASS, NICKEL PLATED,
PIN: BRASS, GOLD PLATED,
DIELECTRIC: PTFE.
4. P/N: 0482
HOUSING: MOLDED DELRIN, BLACK.
5. P/N: W-600/0
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
6. P/N: W-600/2
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
7. PERFORMANCE:
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F [105°C]

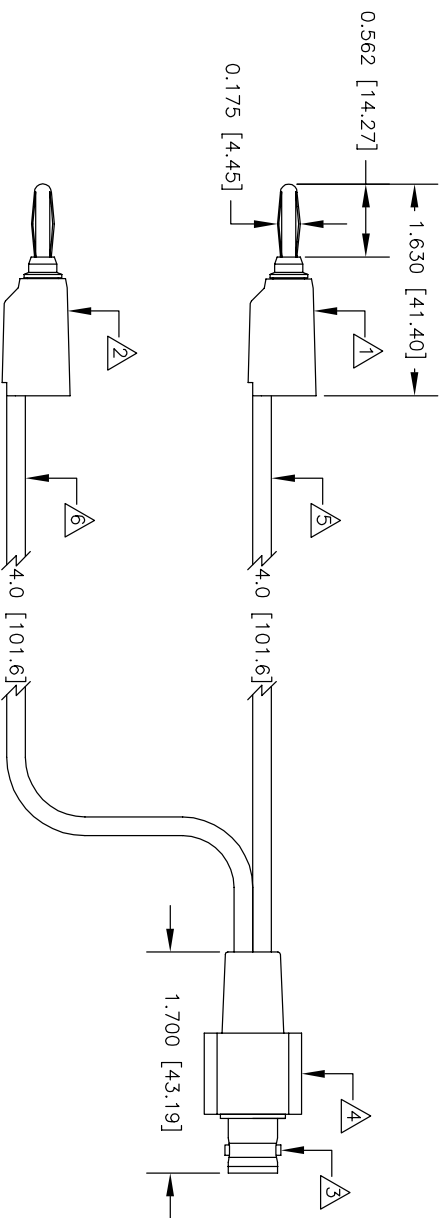

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES * .XXX * #		CONTRACT NO.	
DRAWN R.L.		APPROVALS	DATE
MATERIAL SEE NOTE.		APPROVED BY	10/10
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION DO NOT SCALE DRAWING			
E-ZHOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.		DESCRIPTION BNC FEMALE (9230) ADAPTER TO STK BAN PLUGS (9260)	
SIZE	CODE	IDENT NO.	DRAWING NO.
B	08505	1002	
SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-ZHOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-ZHOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.