


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 0268 & P/N: 0148/0
INSULATOR: HEAT SHRINK TUBING 221. BLACK.
BODY: BRASS, 100 TO 160μ [2.54 TO 4.06 μm] TIN PLATED.
CONTACT: COPPER ALLOY, 100 TO 160μ [2.54 TO 4.06 μm] TIN PLATED.
SPRING: COPPER ALLOY.
- P/N W-700/COLOR
28AWG 7x36 TINNED COPPER
0.035 [0.89] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
- PERFORMANCE:
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

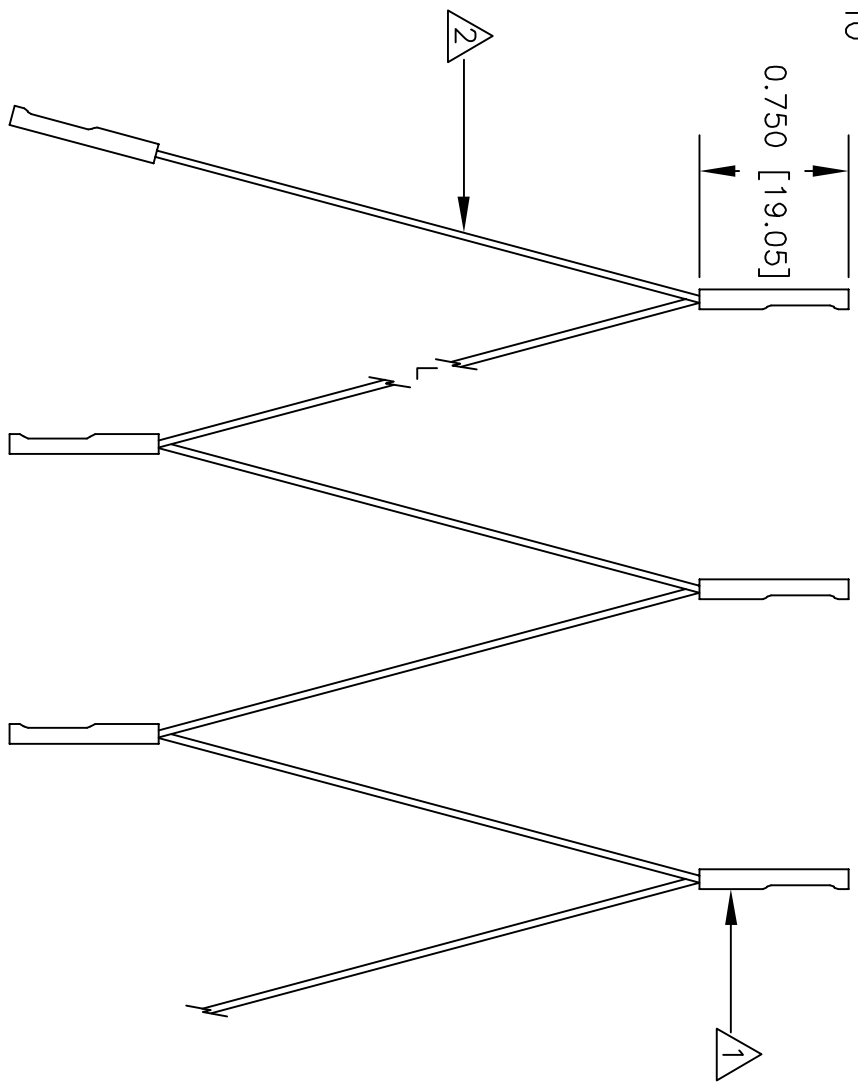

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES
	± .XX ± .XXX ±
	MATERIAL SEE NOTE.
	FINISH SEE NOTE.
	USED ON
	APPLICATION DO NOT SCALE DRAWING

CONTRACT NO.	
APPROVALS	DATE
DRAWN R.L.	9/10
APPROVED BY	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION	
E-Z-LINK 0.025" [0.63] SQ. SKT CONT. JUMPER	
SIZE	CODE IDENT NO. DRAWING NO.
A	08505 LT
SCALE	1:1
SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.