

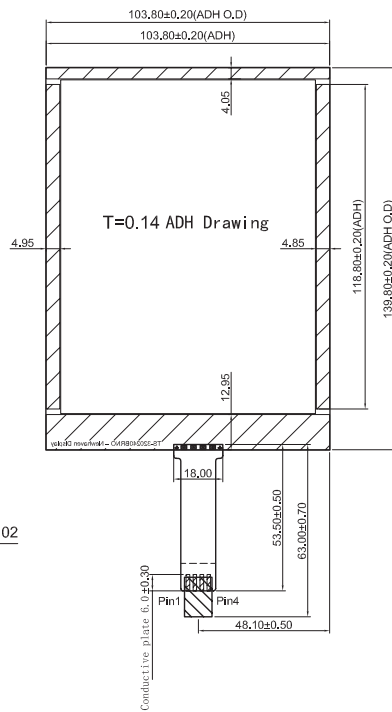
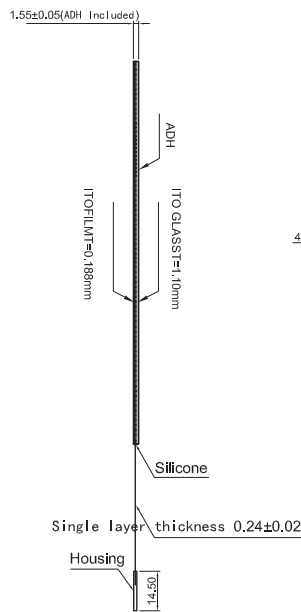



PIN OUT	CIRCUIT DIAGRAM
1 right	
2 left	
3 bottom	
4 top	

PIN1-PIN2	350ohm-1000ohm	GLASS
PIN3-PIN4	200ohm-650ohm	FILM

Revision Record

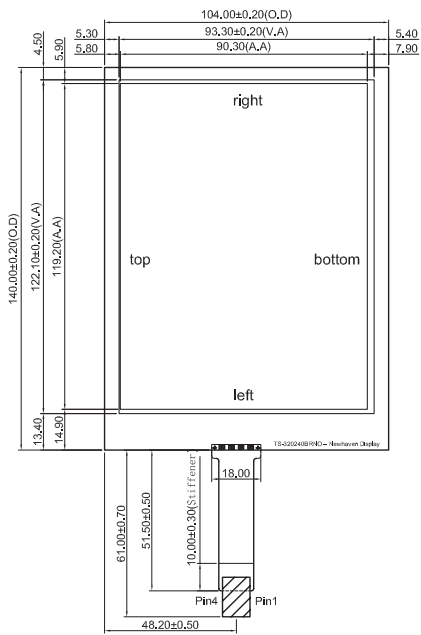

SEC: A" SCALE: 2X
Back plate



- NOTE:
- PRODUCT CONFIGURATION:
ITO FILM(Anti Hard Coating T=0.188mm)+
ITO GLASS (T=1.10mm)+FPC +Housing+ADH
 - RATED VOLTAGE: DC 5V
 - INSULATION RESISTANCE: $\geq 20M\Omega$ (25V DC)
 - LINEARITY: $\leq 1.5\%$
 - TRANSMITTANCE: $\geq 80\%$
 - OPERATE FORCE: $65\pm 15g$
 - RESPOND TIME: $< 10ms$
 - HARDNESS OF SURFACE: 3H
 - INPUT LIFE: $\geq 1,000,000$ TIMES
 - NOTES LIFE: $\geq 100,000$ TIMES
 - OPERATION TEMP: $-10^{\circ}C \rightarrow +60^{\circ}C$
 - STORAGE TEMP: $-20^{\circ}C \rightarrow +70^{\circ}C$
 - TOLERANCE UNLESS: ± 0.2
 - ACCORD WITH "ROHS" CRITERIA

UNIT: mm		Approved by	<h1>Newhaven Display</h1>
SCALE: 1 : 1	DATE: 2010-04-20	Check by	
PAGE: 1 of 1	TAIL: A-202(1)	Drawing by	
Product No: TS-320240BRNO			