

**SCHOTTKY RECTIFIER**

**30 Amp**


**Major Ratings and Characteristics**

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	2 x 15	A
$V_{RRM}$	30	V
$V_F$ @ 15 Apk, $T_J = 125^\circ\text{C}$ (Per Leg)	0.37	V
$T_J$ range	-55 to 150	$^\circ\text{C}$

**Description/ Features**

This center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- Center tap configuration
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

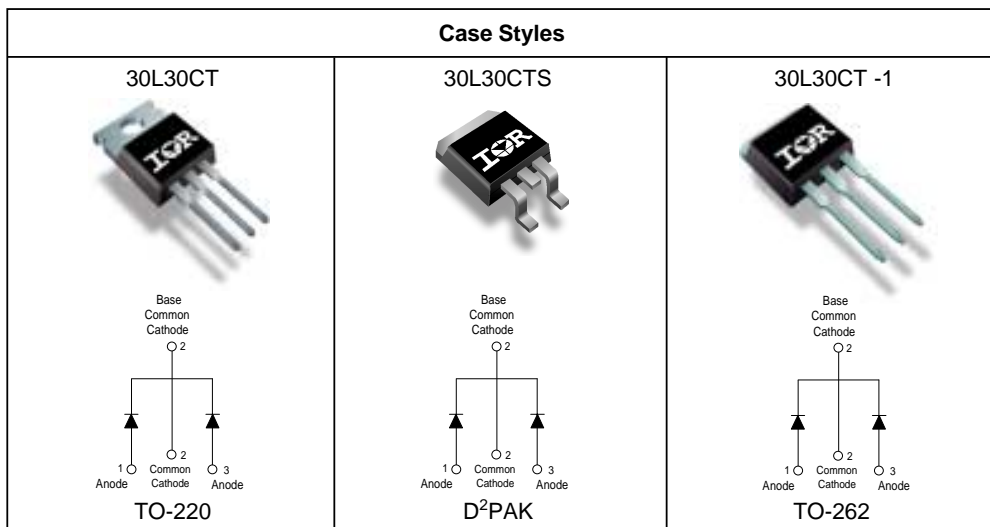

## Voltage Ratings

Parameters	30L30CT 30L30CTS 30L30CT-1
$V_R$ Max. DC Reverse Voltage (V)	30
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current Per Device Per Leg	30 15	A	50% duty cycle @ $T_C = 140^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current	1450 220	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated $V_{RWM}$ applied
$E_{AS}$ Non-Repetitive Avalanche Energy (Per Leg)	15	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 2$ Amps, $L = 7.5$ mH
$I_{AR}$ Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

## Electrical Specifications

Parameters	Values	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (Per Leg) (1)	0.46	V	@ 15A
	0.57	V	@ 30A
	0.37	V	@ 15A
	0.50	V	@ 30A
$I_{RM}$ Max. Reverse Leakage Current (Per Leg)	1.50	mA	$T_J = 25^\circ\text{C}$
	350	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max. Junction Capacitance (Per Leg)	1500	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance (Per Leg)	8.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/ $\mu\text{s}$	(Rated $V_R$ )

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C}/\text{W}$	DC operation
$R_{thJC}$ Max. Thermal Resistance Junction to Case (Per Package)	0.8	$^\circ\text{C}/\text{W}$	DC operation
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	

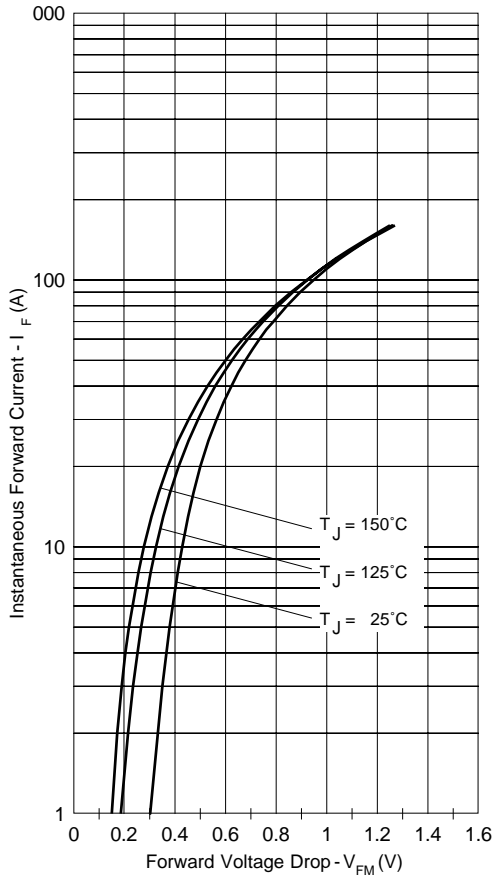


Fig. 1 - Maximum Forward Voltage Drop Characteristics

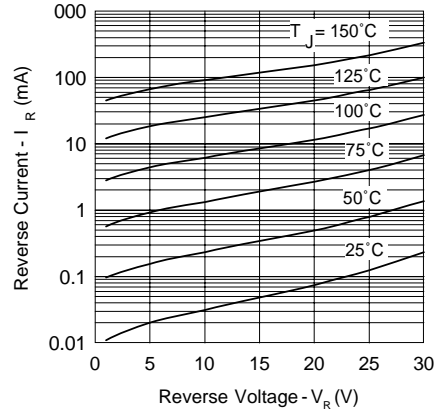


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

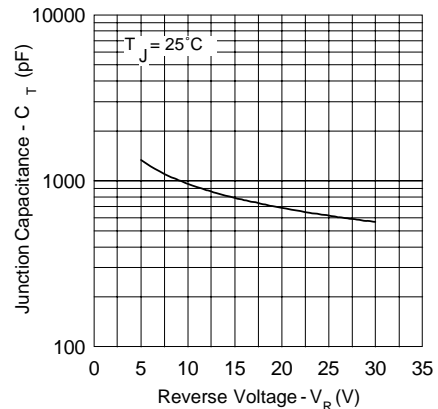


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



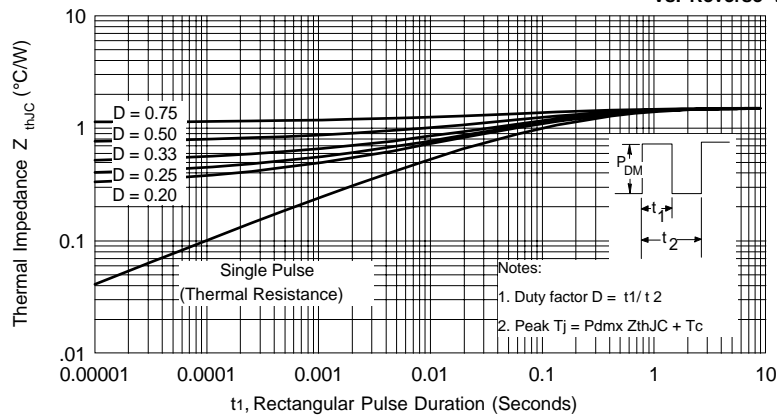



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

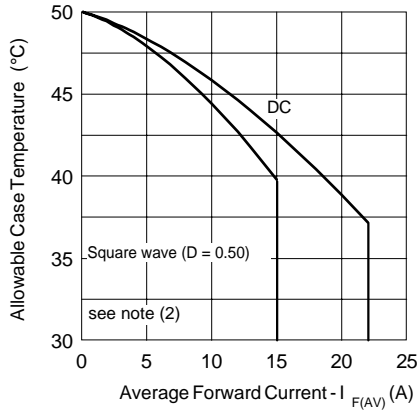

**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

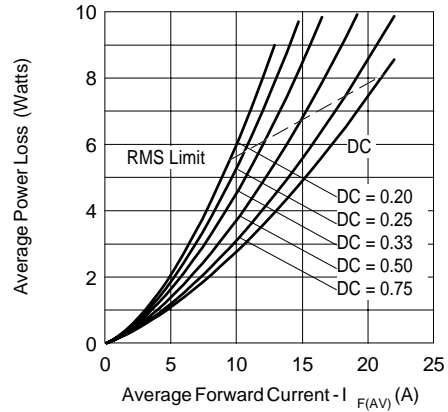

**Fig. 6 - Forward Power Loss Characteristics**


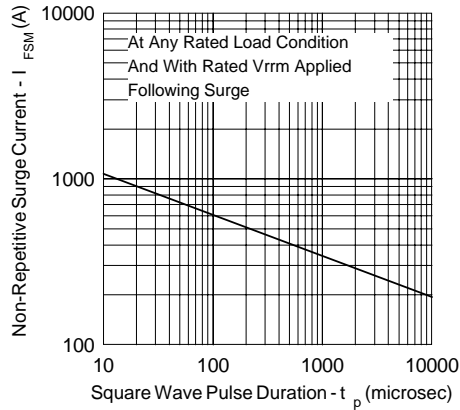


**Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)**


(2) Formula used:  $T_C = T_J - P_d \times R_{thJC}$ ;

$P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)}/D)$  (see Fig. 6)


Outline Table

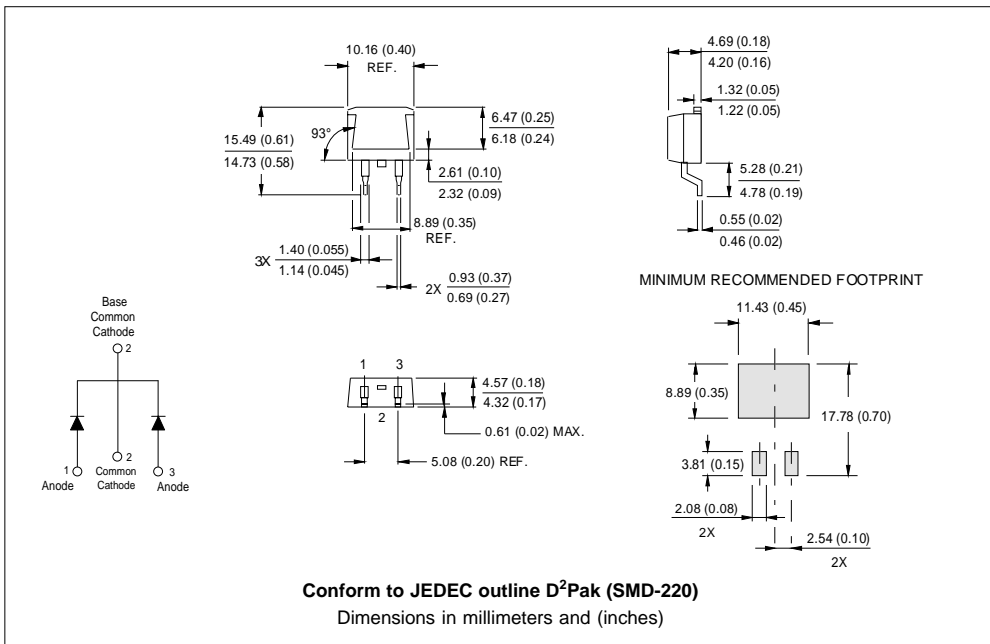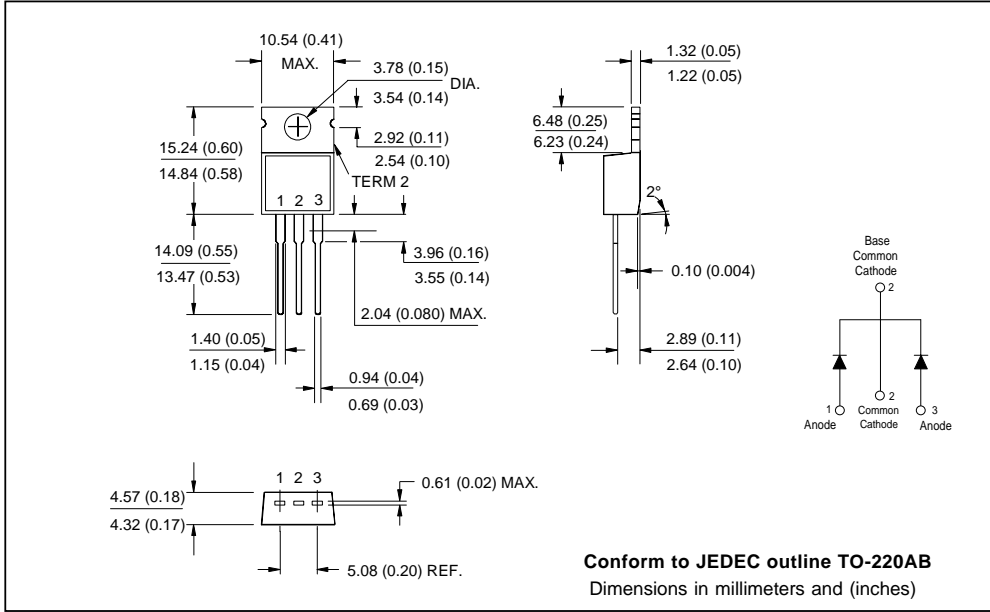

Outline Table

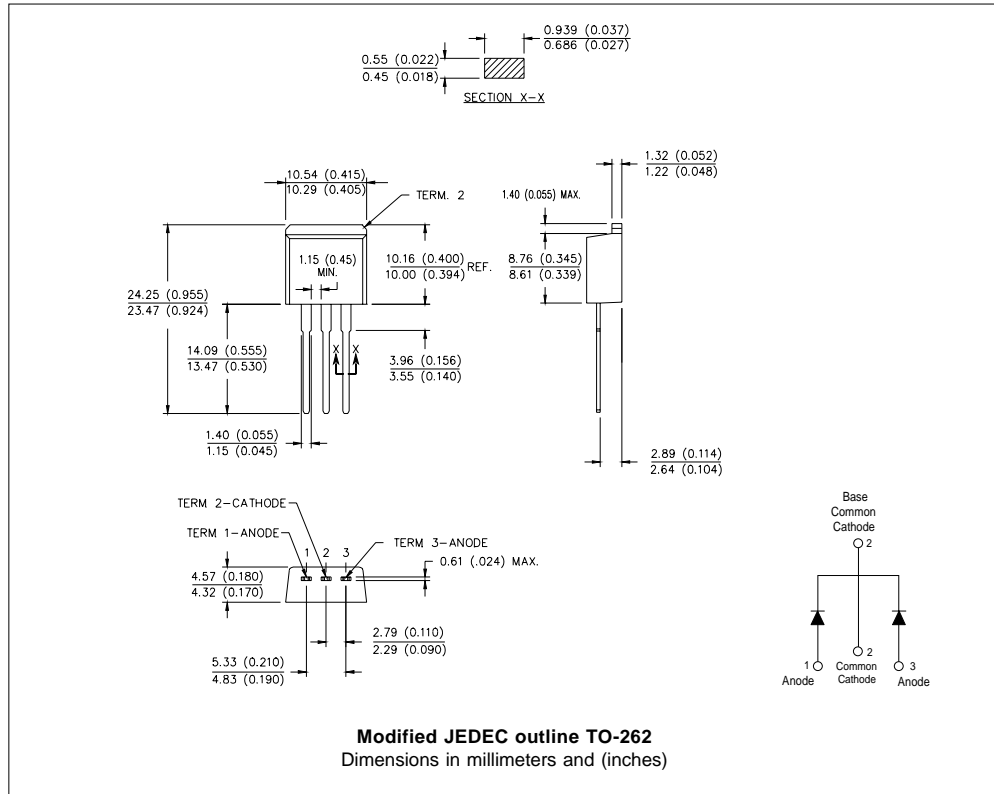

Marking Information

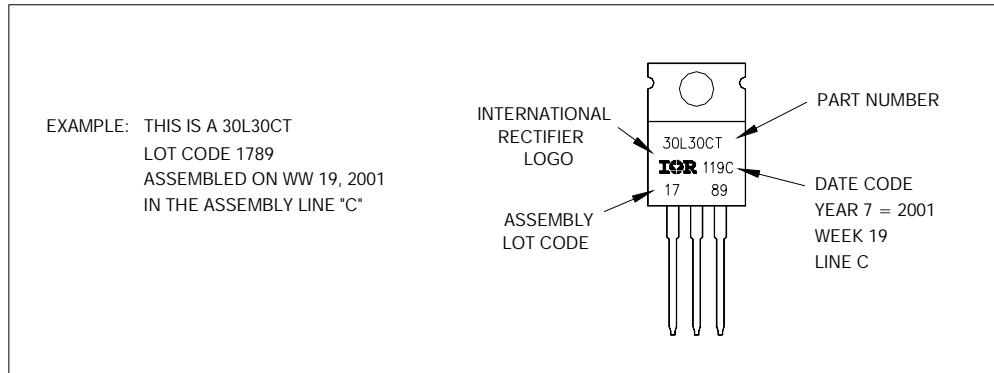

30L30CT

\*\*\*\*\*

This model has been developed by  
 Wizard SPICE MODEL GENERATOR (1999)  
 (International Rectifier Corporation)  
 contains Proprietary Information

\*\*\*\*\*

SPICE Model Diode is composed by a  
 simple diode plus paralld VCG2T

\*\*\*\*\*

.SUBCKT 30l30ct ANO CAT

D1 ANO 1 DMOD (0.08936)

\*Define diode model

.MODEL DMOD D(IS=3.01789428908089E-04A,N=1.12506549677918,BV=35V,

+ IBV=0.40837541124234A,RS= 0.000285952,CJO=3.65460570356249E-08,

+ VJ=0.934944724736772,XTI=2, EG=0.674450307828855)

\*\*\*\*\*

\*Implementation of VCG2T

VX 1 2 DC 0V

R1 2 CAT TRES 1E-6

.MODEL TRES RES(R=1,TC1=11.2856367229303)

GP1 ANO CAT VALUE={-ABS(I(VX))\*EXP((((-2.138249E-03/11.28564)\*((V(2,CAT)\*1E6)/(I(VX)+1E-6)-1))+1)\*9.434315E-02\*ABS(V(ANO,CAT)))-1}}

\*\*\*\*\*

.ENDS 30l30ct

Thermal Model Subcircuit

.SUBCKT 30L30CT 5 1

CTHERM1	5	4	3.53E-1
CTHERM2	4	3	6.35E0
CTHERM3	3	2	5.15E+1
CTHERM4	2	1	4.08E+3

RTHERM1	5	4	3.15E-1
RTHERM2	4	3	6.15E-1
RTHERM1	3	2	3.7E-1
RTHERM1	2	1	1.98E-1

.ENDS 30L30CT

## Ordering Information Table

Device Code	
30	L
30	C
T	-1
①	②
③	④
⑤	⑥
<b>1</b>	- 30 = Current Rating
<b>2</b>	- L = Schottky - L Series
<b>3</b>	- 30 = Voltage Rating
<b>4</b>	- C = Common Cathode
<b>5</b>	- T = TO-220
<b>6</b>	- 1 = TO-262 S = D <sup>2</sup> Pak

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 02/03



This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.