

# International **IR** Rectifier

PD-2.281 rev. A 12/97

**242NQ030**

SCHOTTKY RECTIFIER

240 Amp

## Major Ratings and Characteristics



Characteristics	242NQ030	Units
$I_{F(AV)}$ Rectangular waveform	240	A
$V_{RRM}$	30	V
$I_{FSM}$ @ $t_p=5\mu s$ sine	27,000	A
$V_F$ @ 240Apk, $T_J=125^\circ C$	0.42	V
$T_J$ range	-55 to 150	°C

## Description/Features

The 242NQ030 high current Schottky rectifier module has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to  $150^\circ C$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ C T_J$  operation
- Unique high power, Half-Pak module
- Replaces four parallel DO-5's
- Easier to mount and lower profile than DO-5's
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

## CASE STYLE AND DIMENSIONS

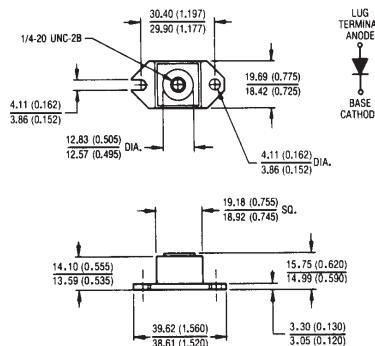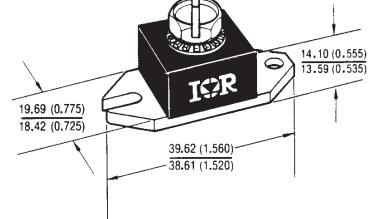

**Outline HALF PAK Module**  
Dimensions in millimeters and inches

242NQ030

PD-2.281 rev. A 12/97

International  
**IR** Rectifier

**Voltage Ratings**

Part number	242NQ030	
$V_R$ Max. DC Reverse Voltage (V)		
$V_{RWM}$ Max. Working PeakReverse Voltage (V)		30

**Absolute Maximum Ratings**

Parameters	242NQ	Units	Conditions
$I_{F(AV)}$ Max.AverageForwardCurrent * See Fig. 5	240	A	50%duty cycle @ $T_C = 111^\circ C$ , rectangularwave form
$I_{FSM}$ Max. PeakOneCycleNon-Repetitive Surge Current * See Fig. 7	27,000	A	5μs Sine or 3μs Rect. pulse
	3000		10ms Sine or 6ms Rect. pulse
$E_{AS}$ Non-RepetitiveAvalancheEnergy	216	mJ	$T_J = 25^\circ C$ , $I_{AS} = 48$ Amps, $L = 0.19$ mH
$I_{AR}$ Repetitive AvalancheCurrent	48	A	Currentdecayinglinearlytozero in 1μsec Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

**Electrical Specifications**

Parameters	242NQ	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1) * See Fig. 1	0.51	V	$@ 240A$
	0.62	V	$@ 480A$
	0.42	V	$@ 240A$
	0.54	V	$@ 480A$
$I_{RM}$ Max. Reverse Leakage Current (1) * See Fig. 2	20	mA	$T_J = 25^\circ C$
	1120	mA	$T_J = 125^\circ C$
$C_T$ Max. Junction Capacitance	14,800	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ C$
$L_S$ Typical Series Inductance	5.0	nH	From top of terminal hole to mounting plane
dv/dt Max. Voltage Rate of Change (Rated $V_R$ )	10,000	V/ μs	

(1) Pulse Width &lt; 300μs, Duty Cycle &lt; 2%

**Thermal-Mechanical Specifications**

Parameters	242NQ	Units	Conditions
$T_J$ Max.JunctionTemperatureRange	-55to150	°C	
$T_{stg}$ Max.StorageTemperatureRange	-55to150	°C	
$R_{thJC}$ Max.ThermalResistanceJunction toCase	0.20	°C/W	DCoperation * See Fig. 4
$R_{thCS}$ Typical Thermal Resistance,Caseto Heatsink	0.15	°C/W	Mountingsurface,smoothandgreased
wt ApproximateWeight	25.6(0.9)	g(oz.)	
T MountingTorque Min. Max. TerminalTorque Min. Max.	40(35)	Kg-cm (lbf-in)	Non-lubricatedthreads
	58(50)		
	58(50)		
	86(75)		
Case Style	HALF PAK Module		

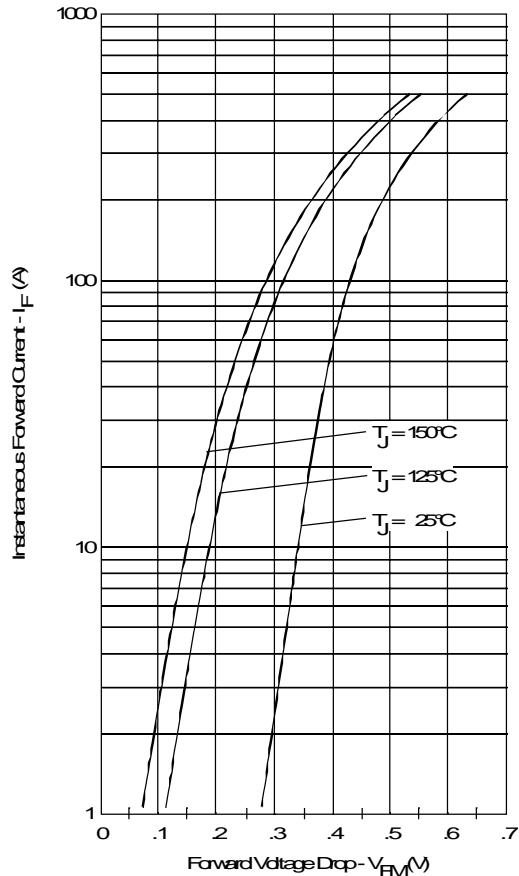


Fig. 1-Maximum Forward Voltage Drop Characteristics

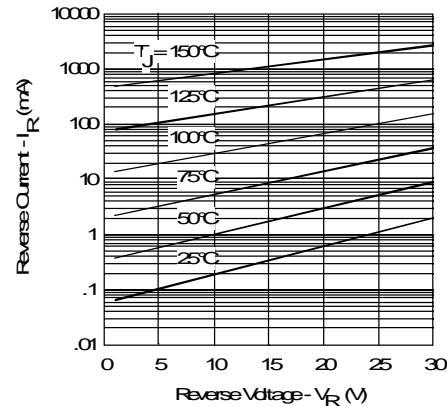


Fig. 2-Typical Values of Reverse Current Vs. Reverse Voltage

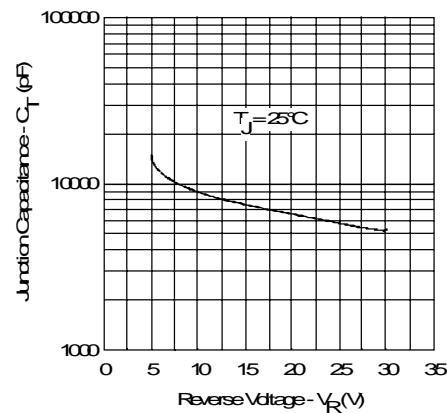


Fig. 3-Typical Junction Capacitance Vs. Reverse Voltage

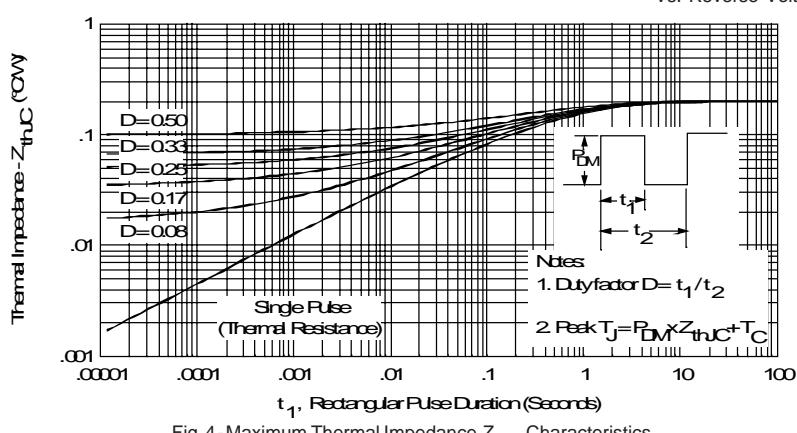


Fig. 4-Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

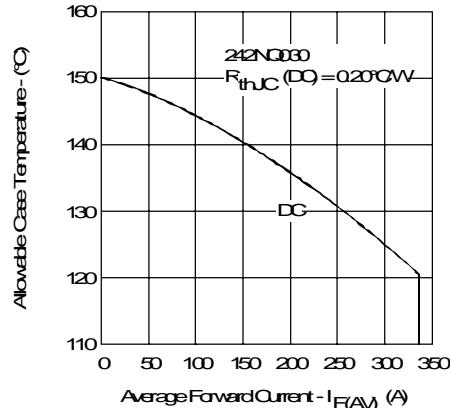


Fig.5-Maximum Allowable Case Temperature Vs. Average Forward Current

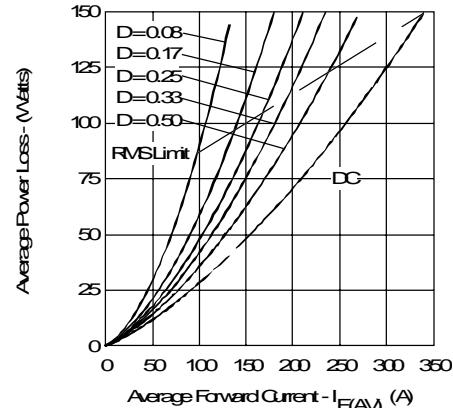


Fig.6-Forward Power Loss Characteristics

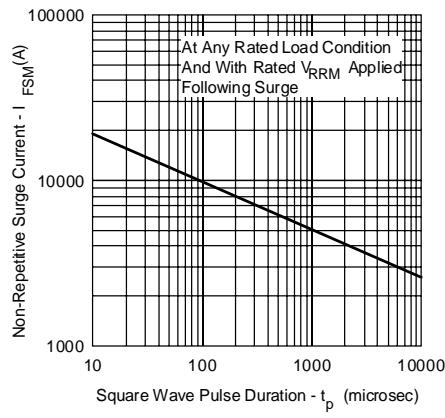


Fig.7-Maximum Non-Repetitive Surge Current

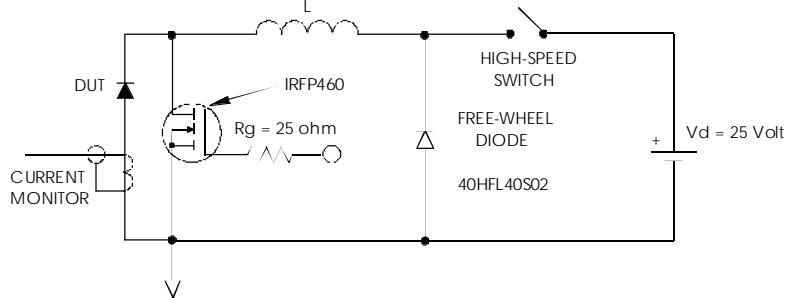


Fig.8-Unclamped Inductive Test Circuit

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.