




TO-220AB

Features

- ◆ Plastic material used carries Underwriters Laboratory Classifications 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in power supply – output rectification, power management, instrumentation
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case

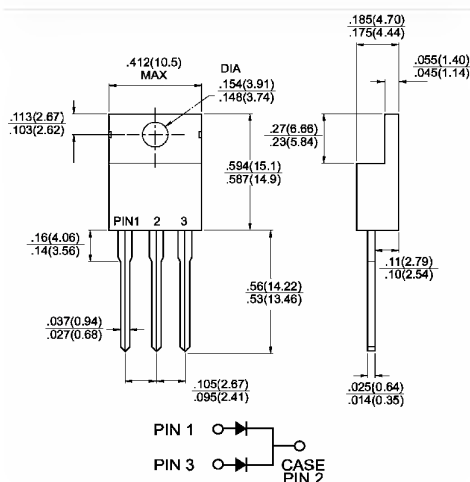

Dimensions in inches and (millimeters)

Mechanical Data

- ◆ Cases: JEDEC TO-220AB molded plastic body
- ◆ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ◆ Polarity: As marked
- ◆ Mounting position: Any
- ◆ Mounting torque: 5 in. - lbs. max
- ◆ Weight: 0.08 ounce, 2.24 grams

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	MBR 10H100CT	MBR 10H150CT	MBR 10H200CT	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	150	200	V
Maximum RMS Voltage	V_{RMS}	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	100	150	200	V
Maximum Average Forward Rectified Current at $T_c=125^\circ C$	$I_{(AV)}$	10			A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz) at $T_c=125^\circ C$	I_{FRM}	32			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	120			A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1.0		0.5	A
Maximum Instantaneous Forward Voltage at: (Note 2) $I_F=5A, T_c=25^\circ C$ $I_F=5A, T_c=125^\circ C$ $I_F=10A, T_c=25^\circ C$ $I_F=10A, T_c=125^\circ C$	V_F	0.85 0.75 0.95 0.85	0.88 0.75 0.97 0.85		V
Maximum Instantaneous Reverse Current @ $T_c=25^\circ C$ at Rated DC Blocking Voltage @ $T_c=125^\circ C$ (Note 2)	I_R	5 1.0			μA mA
Voltage Rate of Change (Rated V_R)	dV/dt	10,000			V/ μS
Maximum Typical Thermal Resistance (Note 3)	$R_{\theta JC}$	1.5			$^\circ C/W$
Operating Junction Temperature Range	T_J	-65 to +175			$^\circ C$
Storage Temperature Range	T_{STG}	-65 to +175			$^\circ C$

- Notes:
1. 2.0us Pulse Width, f=1.0 KHz
 2. Pulse Test: 300us Pulse Width, 1% Duty Cycle
 3. Thermal Resistance from Junction to Case Per Leg, Mount on Heatsink Size of 2 in x 3 in x 0.25in Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (MBR10H100CT THRU MBR10H200CT)

FIG.1- FORWARD CURRENT DERATING CURVE

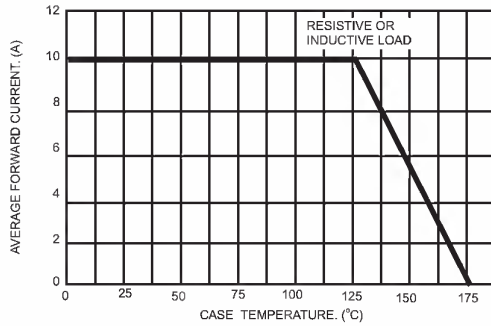


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

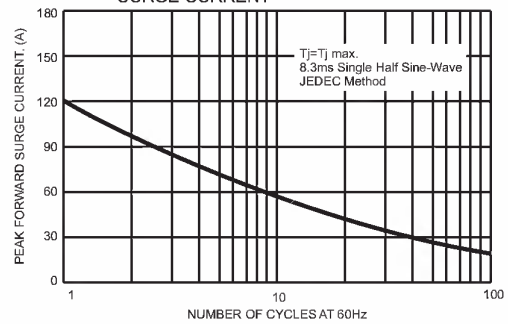


FIG.3- TYPICAL FORWARD CHARACTERISTICS

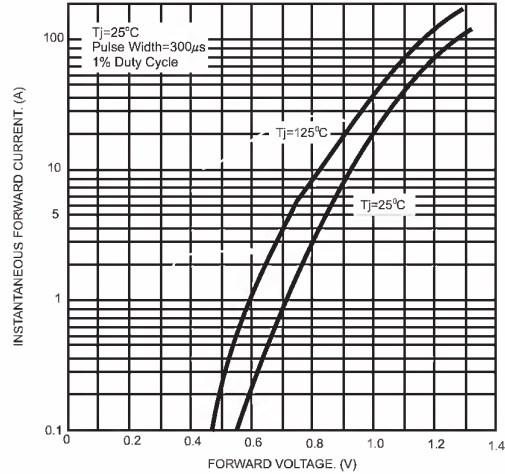


FIG.4- TYPICAL REVERSE CHARACTERISTICS

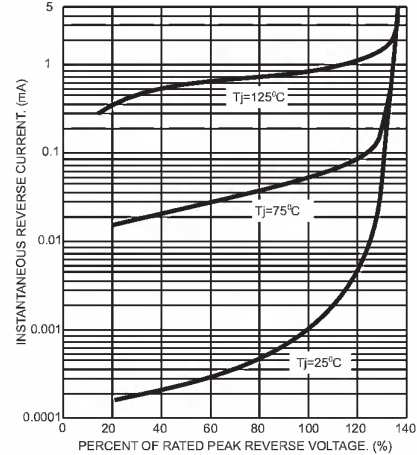


FIG.5- TYPICAL JUNCTION CAPACITANCE

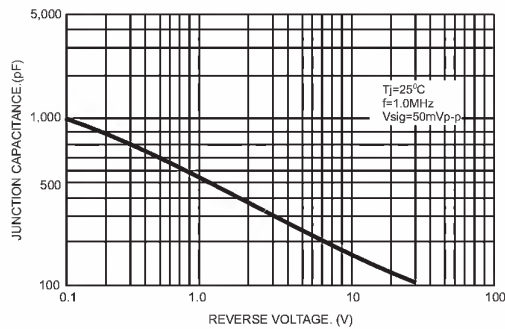


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS PER LEG

