

International  
**IOR** Rectifier

**SAFEIR** Series  
40TPS..

## PHASE CONTROL SCR



$$V_T < 1.45V @ 40A$$

$$I_{TSM} = 500A$$

$$V_{RRM} = 800 - 1200V$$

### Description/ Features


The 40TPS... **SAFEIR** series of silicon controlled rectifiers are specifically designed for medium power switching and phase control applications. The glass passivation technology used has reliable operation up to 125°C junction temperature. Low lgt parts available.

Typical applications are in input rectification (soft start) and these products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.

### Major Ratings and Characteristics

Characteristics	40TPS..	Units
$I_{T(AV)}$ Sinusoidal waveform	35	A
$I_{RMS}$	55	A
$V_{RRM}/V_{DRM}$ Range	800 - 1200	V
$I_{TSM}$	500	A
$V_T$ @ 40 A, $T_J = 25^\circ C$	1.45	V
dv/dt	1000	V/ $\mu s$
di/dt	100	A/ $\mu s$
$T_J$	-40 to 125	$^\circ C$

### Package Outline

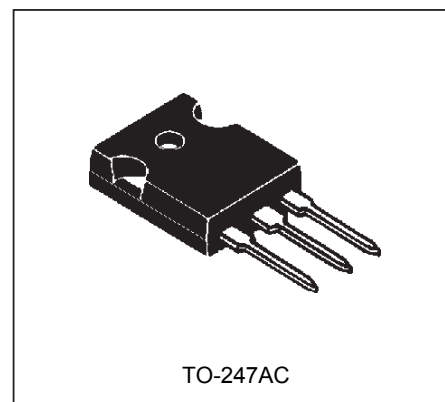

## Voltage Ratings

Part Number	$V_{RRM}/V_{DRM}$ , max. repetitive peak and off-state voltage V	$V_{RSM}$ , maximum non repetitive peak reverse voltage V	$I_{RRM}/I_{DRM}$ 125°C mA
40TPS08	800	900	10
40TPS12	1200	1300	

## Absolute Maximum Ratings

Parameters	40TPS..	Units	Conditions	
$I_{T(AV)}$ Max. Average On-state Current	35	A	@ $T_C = 79^\circ\text{C}$ , 180° conduction half sine wave	
$I_{T(RMS)}$ Max. Continuous RMS On-state Current As AC switch	55			
$I_{TSM}$ Max. Peak One Cycle Non-Repetitive Surge Current	500	A	10ms Sine pulse, rated $V_{RRM}$ applied	Initial $T_J = T_{J\text{max}}$ .
	600		10ms Sine pulse, no voltage reapplied	
$I^2t$ Max. $I^2t$ for Fusing	1250	$\text{A}^2\text{s}$	10ms Sine pulse, rated $V_{RRM}$ applied	
	1760		10ms Sine pulse, no voltage reapplied	
$I^2\sqrt{t}$ Max. $I^2\sqrt{t}$ for Fusing	12500	$\text{A}^2\sqrt{\text{s}}$	t = 0.1 to 10ms, no voltage reapplied	
$V_{T(TO)1}$ Low Level Value of Threshold Voltage	1.02	V	$T_J = 125^\circ\text{C}$	
$V_{T(TO)2}$ High Level Value of Threshold Voltage	1.23			
$r_{t1}$ Low Level Value of On-state Slope Resistance	9.74	m $\Omega$		
$r_{t2}$ High Level Value of On-state Slope Resistance	7.50			
$V_{TM}$ Max. Peak On-state Voltage	1.85	V	@ 110A, $T_J = 25^\circ\text{C}$	
$di/dt$ Max. Rate of Rise of Turned-on Current	100	A/ $\mu\text{s}$	$T_J = 25^\circ\text{C}$	
$I_H$ Max. Holding Current	150	mA		
$I_L$ Max. Latching Current	300			
$I_{RRM}/I_{DRM}$ Max. Reverse and Direct Leakage Current	0.5	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_{RRM}/V_{DRM}$
	10		$T_J = 125^\circ\text{C}$	
$dv/dt$ Max. Rate of Rise of Off-state Voltage	40TPS08	500	$T_J = T_{J\text{max}}$ , linear to 80% $V_{DRM}$ , $R_g\text{-k} = \text{open}$	
	40TPS12	1000		

### Triggering

Parameters	40TPS..	Units	Conditions		
$P_{GM}$ Max. peak Gate Power	10	W			
$P_{G(AV)}$ Max. average Gate Power	2.5				
$I_{GM}$ Max. peak Gate Current	2.5	A			
$-V_{GM}$ Max. peak negative Gate Voltage	10	V	Anode supply = 6V resistive load		
$V_{GT}$ Max. required DC Gate Voltage to trigger	4.0				$T_J = -40^\circ\text{C}$
	2.5				$T_J = 25^\circ\text{C}$
	1.7				$T_J = 125^\circ\text{C}$
$I_{GT}$ Max. required DC Gate Current to trigger	270	mA	$T_J = -40^\circ\text{C}$		
	150		$T_J = 25^\circ\text{C}$		
	80		$T_J = 125^\circ\text{C}$		
	40		$T_J = 25^\circ\text{C}$ , for 40TPS08A and 40TPS12A		
$V_{GD}$ Max. DC Gate Voltage not to trigger	0.25	V	$T_J = 125^\circ\text{C}$ , $V_{DRM}$ = rated value		
$I_{GD}$ Max. DC Gate Current not to trigger	6	mA			

### Thermal-Mechanical Specifications

Parameters	40TPS..	Units	Conditions	
$T_J$ Max. Junction Temperature Range	- 40 to 125	°C		
$T_{stg}$ Max. Storage Temperature Range	- 40 to 125			
$R_{thJC}$ Max. Thermal Resistance Junction to Case	0.6	°C/W	DC operation	
$R_{thJA}$ Max. Thermal Resistance Junction to Ambient	40			
$R_{thCS}$ Max. Thermal Resistance Case to Heatsink	0.2			
wt Approximate Weight	6 (0.21)	g (oz.)		
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)	
	Max.	12 (10)		
Case Style	TO-247AC			

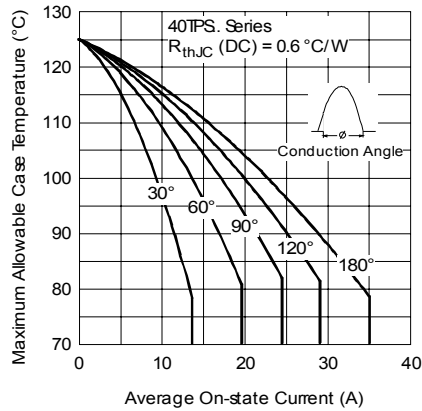


Fig. 1 - Current Rating Characteristics

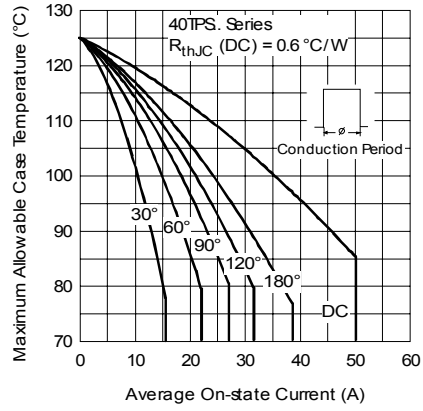


Fig. 2 - Current Rating Characteristics

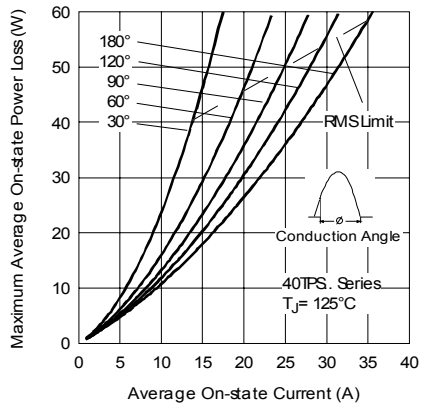


Fig. 3 - On-state Power Loss Characteristics

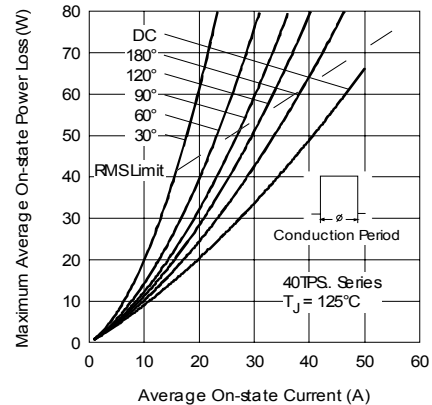


Fig. 4 - On-state Power Loss Characteristics

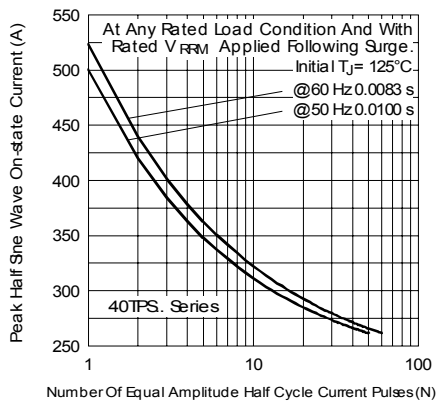


Fig. 5 - Maximum Non-Repetitive Surge

Current

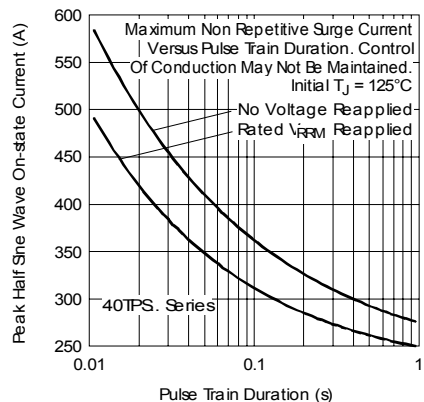


Fig. 6 - Maximum Non-Repetitive Surge Current

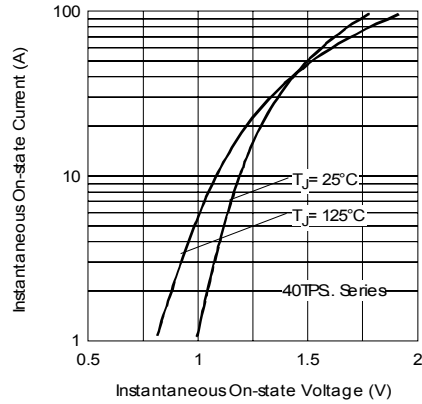


Fig. 7 - On-state Voltage Drop Characteristics

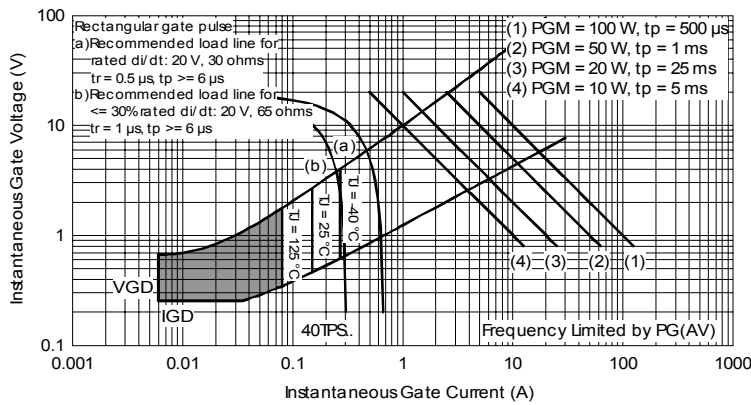


Fig. 8 - Gate Characteristics



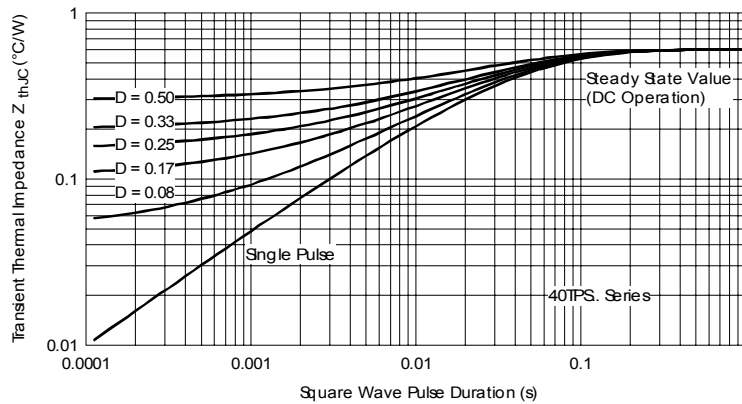


Fig. 9 - Thermal Impedance  $Z_{thjC}$  Characteristics

Outline Table

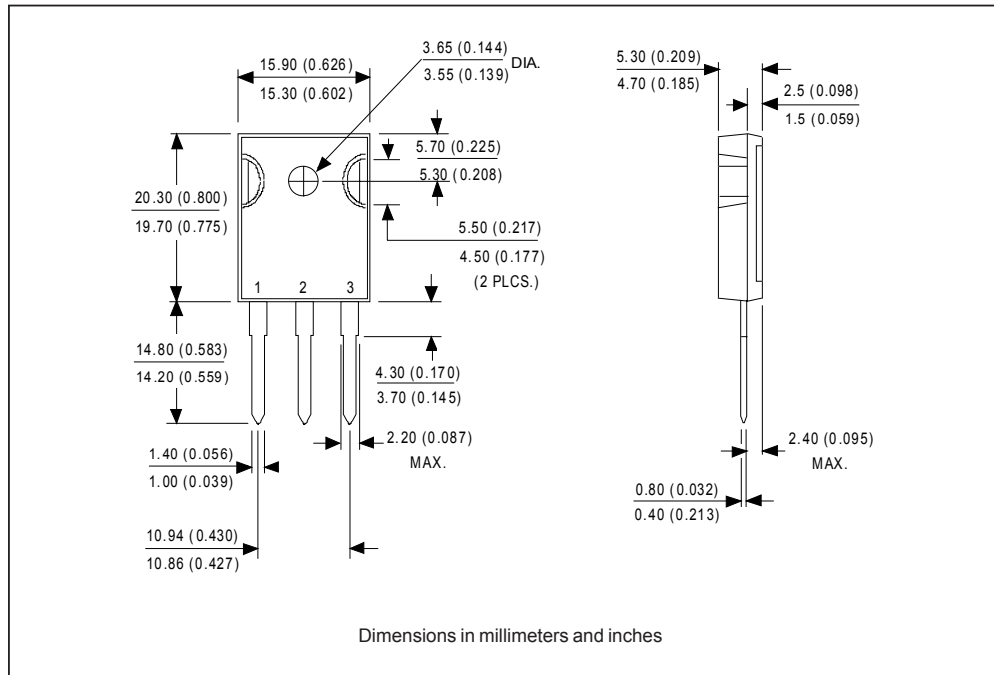


Marking Information

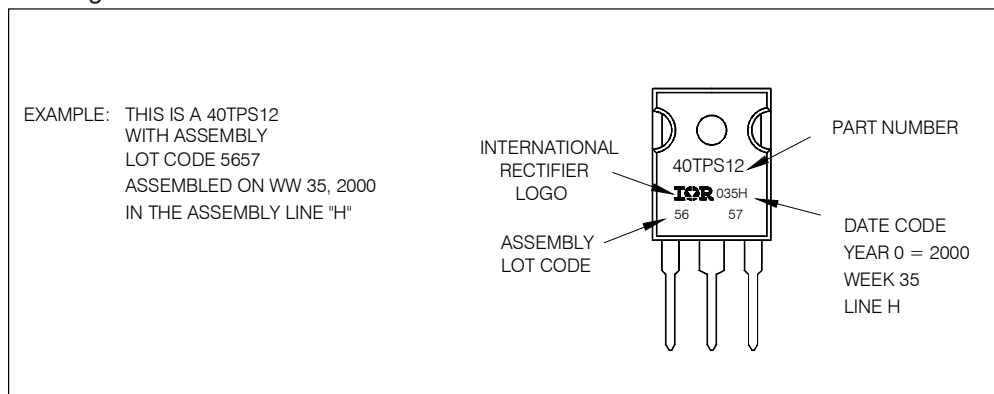

Ordering Information Table

Device Code	
40	T
P	S
12	
①	②
③	④
⑤	⑥

<p><b>1</b> - Current Rating</p> <p><b>2</b> - Circuit Configuration: T = Thyristor</p> <p><b>3</b> - Package: P = TO-247</p> <p><b>4</b> - Type of Silicon: S = Standard Recovery Rectifier</p> <p><b>5</b> - Voltage code: Code x 100 = <math>V_{RRM}</math></p> <p><b>6</b> - None = Standard Igt selection A = Low Igt selection 40mA max. for 40TPS08A and 40TPS12A</p>	
--	---

08 = 800V
12 = 1200V

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.



## Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.