

## Automotive Transient Voltage Suppressors

High Temperature Stability and High Reliability Conditions


**Case Style P600**

Patented\*

 \*Patent #s  
 4,980,315  
 5,166,769  
 5,278,094

### FEATURES

- Patented PAR<sup>®</sup> construction
- Excellent clamping capability
- Low leakage current
- High surge capability
- Solder dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

### MECHANICAL DATA

**Case:** P600, molded epoxy over passivated junction  
 Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$V_{WM}$	24 V
$P_{PPM}$ (10 x 1000 $\mu$ s)	6000 W
$P_{PPM}$ (10 $\mu$ s/50 ms)	2000 W
$P_D$	6.5 W
$I_{RSM}$	90 A
$I_{FSM}$	400 A
$T_J$ max.	185 °C

MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Peak pulse power dissipation with 10/1000 $\mu$ s waveform <sup>(1)</sup> with 10 $\mu$ s/50 ms waveform <sup>(2)</sup>	$P_{PPM}$	6000 2000	W
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 3)	$P_D$	6.5	W
Maximum working stand-off voltage	$V_{WM}$	24	V
Peak forward surge current 8.3 ms single half sine-wave <sup>(3)</sup>	$I_{FSM}$	400	A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 185	°C

#### Notes:

(1) Non-repetitive current pulse, per Fig. 2, with a 10/1000  $\mu$ s waveform

(2) Non-repetitive current pulse, per Fig. 5, with a 10  $\mu$ s/50 ms waveform

(3) Measured on 8.3 ms half sine-wave, or equivalent square wave, duty cycle = 4 pulses per minute maximum

ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)				
PARAMETER	TEST CONDITIONS	SYMBOL	LIMIT	UNIT
Maximum DC reverse leakage current	at V <sub>WM</sub> = 24 V, T <sub>A</sub> = 25 °C T <sub>A</sub> = 150 °C	I <sub>D</sub>	1.0 50	μA
Reverse breakdown voltage	at 100 mA, T <sub>A</sub> = 25 °C min. T <sub>A</sub> = 25 °C max. T <sub>A</sub> = 150 °C min. T <sub>A</sub> = 150 °C max.	V <sub>BR</sub>	26.7 32.6 29.7 36.7	V
Maximum clamping voltage	at I <sub>PP</sub> = 90 A <sup>(1)</sup> , T <sub>A</sub> = 25 °C T <sub>A</sub> = 150 °C	V <sub>C</sub>	40 45	V
Maximum instantaneous forward voltage	at 100 A <sup>(2)</sup>	V <sub>F</sub>	1.8	V

**Notes:**

- (1) Measured on 80 μs square pulse width
- (2) Measured on 300 μs square pulse width

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
6KA24HE3/54 <sup>(1)</sup>	2.710	54	800	13" diameter paper tape and reel

**Note:**

- (1) Automotive grade AEC Q101 qualified

**RATINGS AND CHARACTERISTICS CURVES**

(T<sub>A</sub> = 25 °C unless otherwise noted)

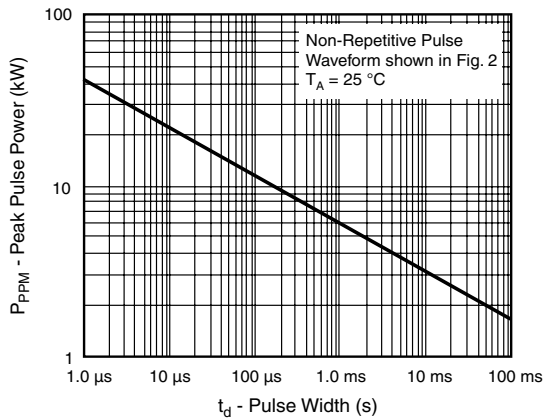


Figure 1. Peak Pulse Power Rating Curve

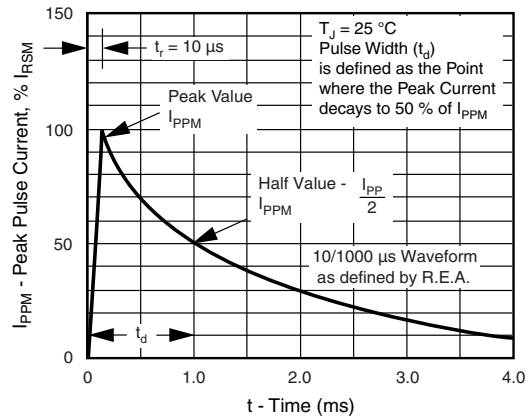


Figure 2. 10/1000 μs Pulse Waveform

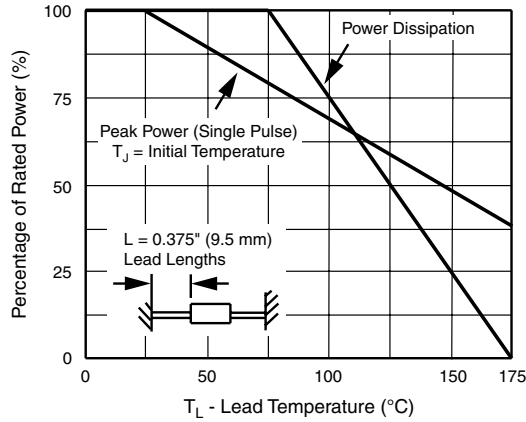


Figure 3. Pulse Derating Curve

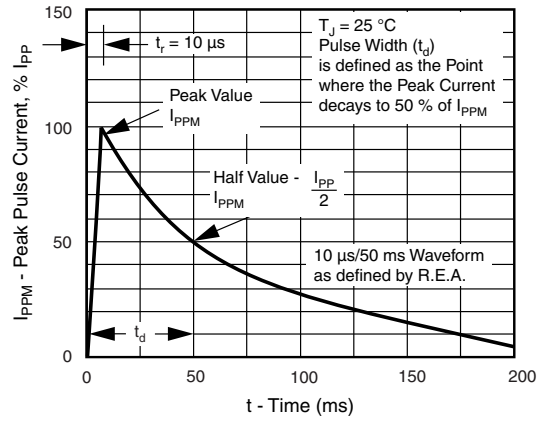


Figure 5. 10  $\mu$ s/50 ms Pulse Waveform


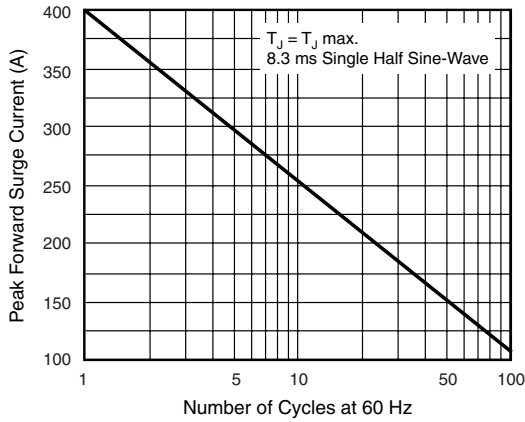


Figure 4. Maximum Non-Repetitive Peak Forward Surge Current

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)



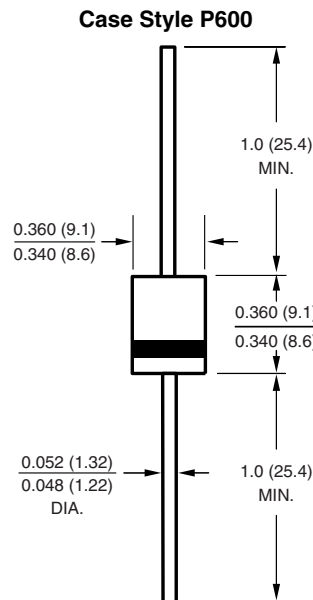

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.