


## Automotive Transient Voltage Suppressors

High Temperature Stability and High Reliability Conditions

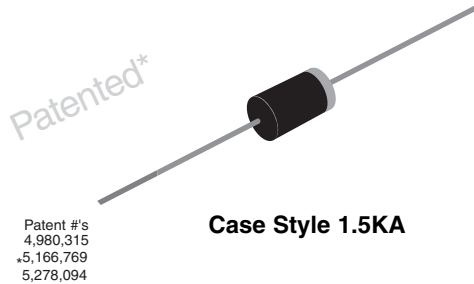

### FEATURES

- Patented PAR<sup>®</sup> construction
- Available in uni-directional polarity only
- 1500 W peak pulse power capability with a 10/1000  $\mu$ s waveform
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and Telecommunication.

### MECHANICAL DATA

**Case:** Molded epoxy body over passivated junction

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

HE3 suffix for high reliability grade (AEC Q101 qualified)

**Polarity:** Color band denotes cathode end

PRIMARY CHARACTERISTICS	
$V_{BR}$	6.8 V to 47 V
$P_{PPM}$	1500 W
$P_D$	6.5 W
$I_{FSM}$	200 A
$T_J$ max.	185 °C

MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	LIMIT	UNIT
Peak pulse power dissipation with a 10/1000 $\mu$ s waveform <sup>(1)</sup> (Fig. 1)	$P_{PPM}$	1500	W
Peak pulse current at $T_A = 25$ °C with a 10/1000 $\mu$ s waveform <sup>(1)</sup> (Fig. 3)	$I_{PPM}$	See next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	$P_D$	6.5	W
Peak forward surge current 8.3 ms single half sine-wave <sup>(2)</sup>	$I_{FSM}$	200	A
Maximum instantaneous forward voltage at 100 A <sup>(2)</sup>	$V_F$	3.5	V
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 185	°C

#### Notes:

(1) Non-repetitive current pulse, per Fig. 3 and derated above  $T_A = 25$  °C per Fig. 2

(2) 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum



<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)									
DEVICE TYPE	BREAKDOWN VOLTAGE $V_{BR}^{(1)}$ AT $I_T$ (V)		TEST CURRENT $I_T$ (mA)	STAND-OFF VOLTAGE $V_{WM}$ (V)	MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ $I_D$ ( $\mu\text{A}$ )	$T_J = 150\text{ }^\circ\text{C}$ MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ $I_D$ ( $\mu\text{A}$ )	PEAK PULSE CURRENT $I_{PPM}^{(2)}$ (A)	MAXIMUM CLAMPING VOLTAGE AT $I_{PPM}$ $V_C$ (V)	MAXIMUM TEMP. COEFFICIENT OF $V_{BR}$ ( $\%/^\circ\text{C}$ )
	MIN	MAX							
1.5KA6.8	6.12	7.48	10	5.50	1000	10000	139	10.8	0.057
1.5KA6.8A	6.45	7.14	10	5.80	1000	10000	143	10.5	0.057
1.5KA7.5	6.75	8.25	10	6.05	500	5000	128	11.7	0.061
1.5KA7.5A	7.13	7.88	10	6.40	500	5000	133	11.3	0.061
1.5KA8.2	7.38	9.02	10	6.63	200	2000	120	12.5	0.065
1.5KA8.2A	7.79	8.61	10	7.02	200	2000	124	12.1	0.065
1.5KA9.1	8.19	10.0	1.0	7.37	50	500	109	13.8	0.068
1.5KA9.1A	8.65	9.55	1.0	7.78	50	500	112	13.4	0.068
1.5KA10	9.00	11.0	1.0	8.10	20	200	100	15.0	0.073
1.5KA10A	9.50	10.5	1.0	8.55	20	200	103	14.5	0.073
1.5KA11	9.90	12.1	1.0	8.92	5.0	50	92.6	16.2	0.075
1.5KA11A	10.5	11.6	1.0	9.40	5.0	50	96.2	15.6	0.076
1.5KA12	10.8	13.2	1.0	9.72	2.0	10	86.7	17.3	0.076
1.5KA12A	11.4	12.6	1.0	10.2	2.0	10	89.8	16.7	0.078
1.5KA13	11.7	14.3	1.0	10.5	2.0	10	78.9	19.0	0.081
1.5KA13A	12.4	13.7	1.0	11.1	2.0	10	82.4	18.2	0.081
1.5KA15	13.5	16.3	1.0	12.1	1.0	10	68.2	22.0	0.084
1.5KA15A	14.3	15.8	1.0	12.8	1.0	10	70.8	21.2	0.084
1.5KA16	14.4	17.6	1.0	12.9	1.0	10	63.8	23.5	0.086
1.5KA16A	15.2	16.8	1.0	13.6	1.0	10	66.7	22.5	0.086
1.5KA18	16.2	19.8	1.0	14.5	1.0	10	56.6	26.5	0.088
1.5KA18A	17.1	18.9	1.0	15.3	1.0	10	59.5	25.2	0.088
1.5KA20	18.0	22.0	1.0	16.2	1.0	10	51.5	29.1	0.090
1.5KA20A	19.0	21.0	1.0	17.1	1.0	10	54.2	27.7	0.090
1.5KA22	19.8	24.2	1.0	17.8	1.0	10	47.0	31.9	0.092
1.5KA22A	20.9	23.1	1.0	18.8	1.0	10	49.0	30.6	0.092
1.5KA24	21.6	26.4	1.0	19.4	1.0	10	43.2	34.7	0.094
1.5KA24A	22.8	25.2	1.0	20.5	1.0	10	45.2	33.2	0.094
1.5KA27	24.3	29.7	1.0	21.8	1.0	10	38.4	39.1	0.096
1.5KA27A	25.7	28.4	1.0	23.1	1.0	10	40.0	37.5	0.096
1.5KA30	27.0	33.0	1.0	24.3	1.0	10	34.5	43.5	0.097
1.5KA30A	28.5	31.5	1.0	25.6	1.0	10	36.2	41.4	0.097
1.5KA33	29.7	36.3	1.0	26.8	1.0	10	31.4	47.7	0.098
1.5KA33A	31.4	34.7	1.0	28.2	1.0	10	32.8	45.7	0.098
1.5KA36	32.4	39.6	1.0	29.1	1.0	10	28.8	52.0	0.099
1.5KA36A	34.2	37.8	1.0	30.8	1.0	10	30.1	49.9	0.099
1.5KA39	35.1	42.9	1.0	31.6	1.0	10	26.6	56.4	0.100
1.5KA39A	37.1	41.0	1.0	33.3	1.0	10	27.8	53.9	0.100
1.5KA43	38.7	47.3	1.0	34.8	1.0	20	24.2	61.9	0.101
1.5KA43A	40.9	45.2	1.0	36.8	1.0	20	25.3	59.3	0.101
1.5KA47	42.3	51.7	1.0	38.1	1.0	20	22.1	67.8	0.101
1.5KA47A	44.7	49.4	1.0	40.2	1.0	20	23.1	64.8	0.101

**Notes:**

- (1)  $V_{BR}$  measured after  $I_T$  applied for 300  $\mu\text{s}$  = square wave pulse or equivalent
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35

### ORDERING INFORMATION (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
1.5KA6.8AHE3/54 <sup>(1)</sup>	0.916	54	1400	13" diameter paper tape and reel

**Note:**

(1) Automotive grade AEC Q101 qualified

### RATINGS AND CHARACTERISTICS CURVES

(T<sub>A</sub> = 25 °C unless otherwise noted)

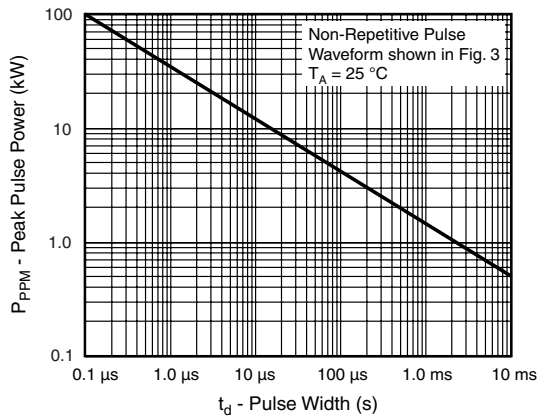


Figure 1. Peak Pulse Power Rating Curve

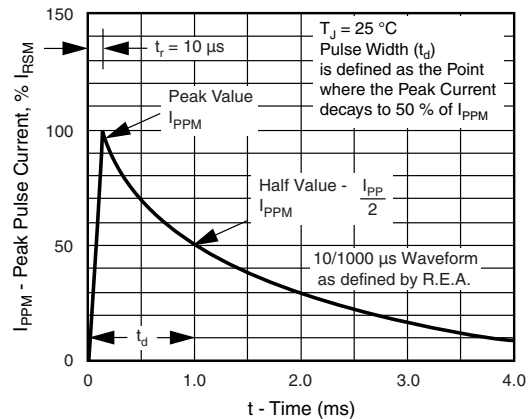


Figure 3. Pulse Waveform

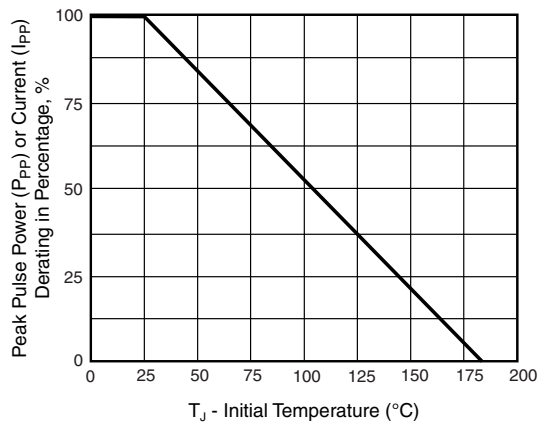


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

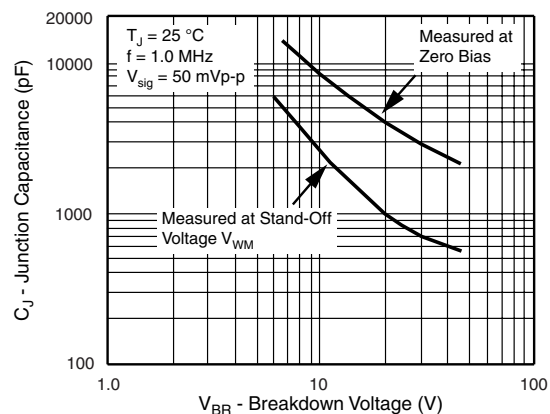


Figure 4. Typical Junction Capacitance Unidirectional

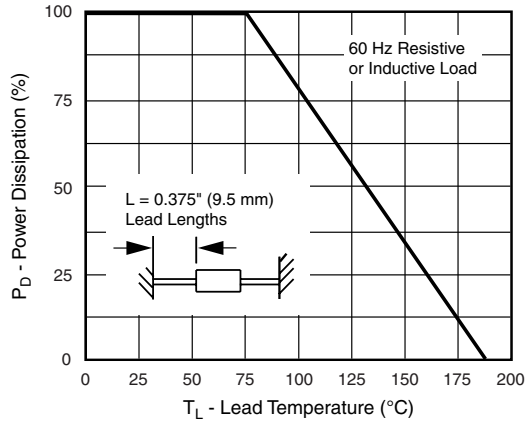


Figure 5. Power Derating Curve


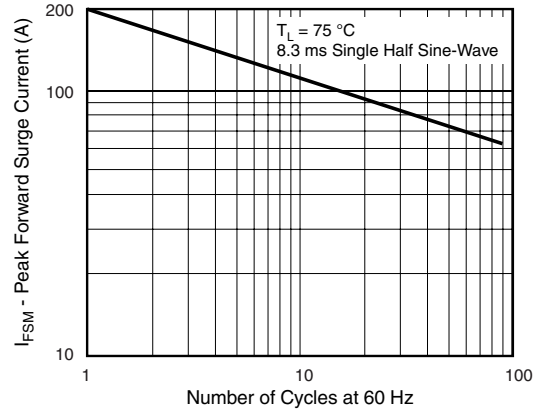


Figure 6. Maximum Non-Repetitive/Peak Forward Surge Current

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### Case Style 1.5KA



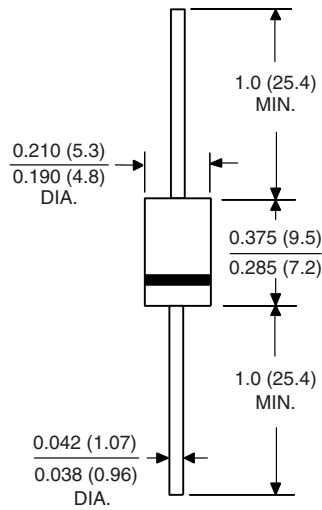

## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.