


CUSTOMER DRAWING

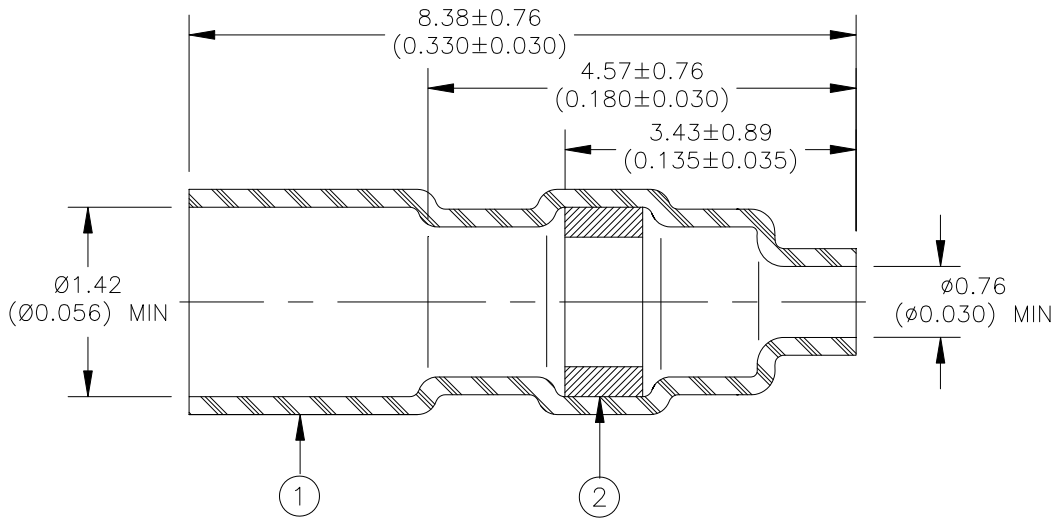


MATERIALS

1. INSULATION SLEEVE: Heat shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL1 per ANSI J-STD-004.

APPLICATION

1. Sleeve will recover to 0.76 (0.030) max.
2. This drawing forms part of Raychem Specification Control Drawing D-711-00.

		300 Constitution Dr Menlo Park, CA 94025, U.S.A.	TITLE: <h3 style="text-align: center;">SOLDERSLEEVE, STEPPED INSULATION</h3>		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem Devices	DOCUMENT NO.: <h3 style="text-align: center;">D-141-07</h3>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: <h3 style="text-align: center;">B</h3>	DATE: <h3 style="text-align: center;">November 22, 2010</h3>
REVISED BY: <h3 style="text-align: center;">UNGUYEN</h3>	CAGE CODE: <h3 style="text-align: center;">06090</h3>	ECO NUMBER: <h3 style="text-align: center;">ECO-10-023873</h3>		SCALE: <h3 style="text-align: center;">NTS</h3>	SIZE: A SHEET: 1 of 1

© 2001 - 2010 Tyco Electronics Corporation. All rights reserved.
 If this document is printed it becomes uncontrolled. Check for the latest revision.