muRata	Decise			English	中文(简体)	日本語
Innerotor in Electronic	Clabel Marth America	a ⊁Europe	Part Number Search			Search
Home	Products	" Search	Support	.::	About Us	
Home> Search E	ngine > Catalog: CSTCE_V_A					

Resonators > CERALOCK (MHz) > Series

How to check EU RoHS Comliant of Our Products is here.

Product Lifecycle Stage	in Production
Recommended Rank	Non-Preferred
Replacement	This product is in production, but <u>CSTCE V C</u> is strongly recommended in supply capacity.


Specification

Global Part Number	CSTCE_V_A	
Previous Part Number		
Oscillating Frequency	14.00 to 20.00MHz	
Initial Tolerance	±0.5%	
Temp. Stability	±0.3%	
Temperature Range	-40 to 125°C	
Wash	Available	
Ultrasonic Wash	Available	
Capacitor	Built in	
Frequency Tolerance	Available in ±0.3%, ±0.2%	
Use	The size of external electrode is not same as CSTCE_V_C and CSTCE_V_13C.	
Applications	For automotive electronics	

Minimum Quantity

180mm Paper Tape	
180mm Embossed Tape	3000
330mm Paper Tape	
330mm Embossed Tape	9000
Bulk Case	
Bulk(Bag)	500
Ammo Pack	
320Reel	
Magazine	
Box	

Details

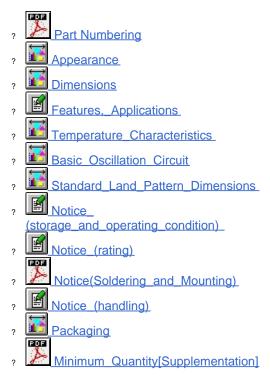

Please approve our product specifications or to transact the approval sheet for product specifications before ordering. Please read rating and !Cautions first. Product specifications in this catalog are as of January 2008.

All products and company names herein are trademarks or registered trademarks of their respective owners.