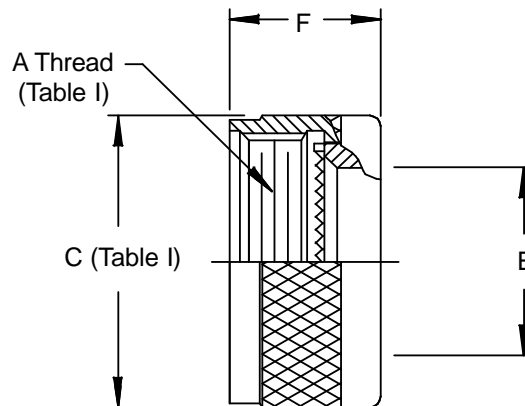
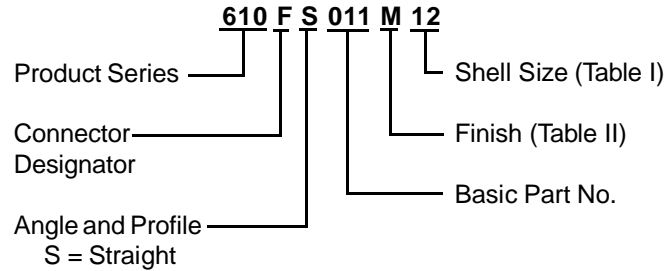


**CONNECTOR
DESIGNATORS
A-F-H-L-S
ROTATABLE
COUPLING**


See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: CABLE ENTRY			
Shell Size			
Conn. Desig. A-F-L-S	H	E Dia Ref	F Max
08	09	.270 (6.9)	.710 (18.0)
10	11	.375 (9.5)	.710 (18.0)
12	13	.511 (13.0)	.710 (18.0)
14	15	.585 (14.9)	.710 (18.0)
16	17	.710 (18.0)	.710 (18.0)
18	19	.789 (20.0)	.710 (18.0)
20	21	.914 (23.2)	.710 (18.0)
22	23	1.039 (26.4)	.710 (18.0)
24	25	1.154 (29.3)	.710 (18.0)
28		1.389 (35.3)	.890 (22.6)
32		1.635 (41.5)	.890 (22.6)
36		1.850 (47.0)	.890 (22.6)

Metric dimensions (mm) are indicated in parentheses.