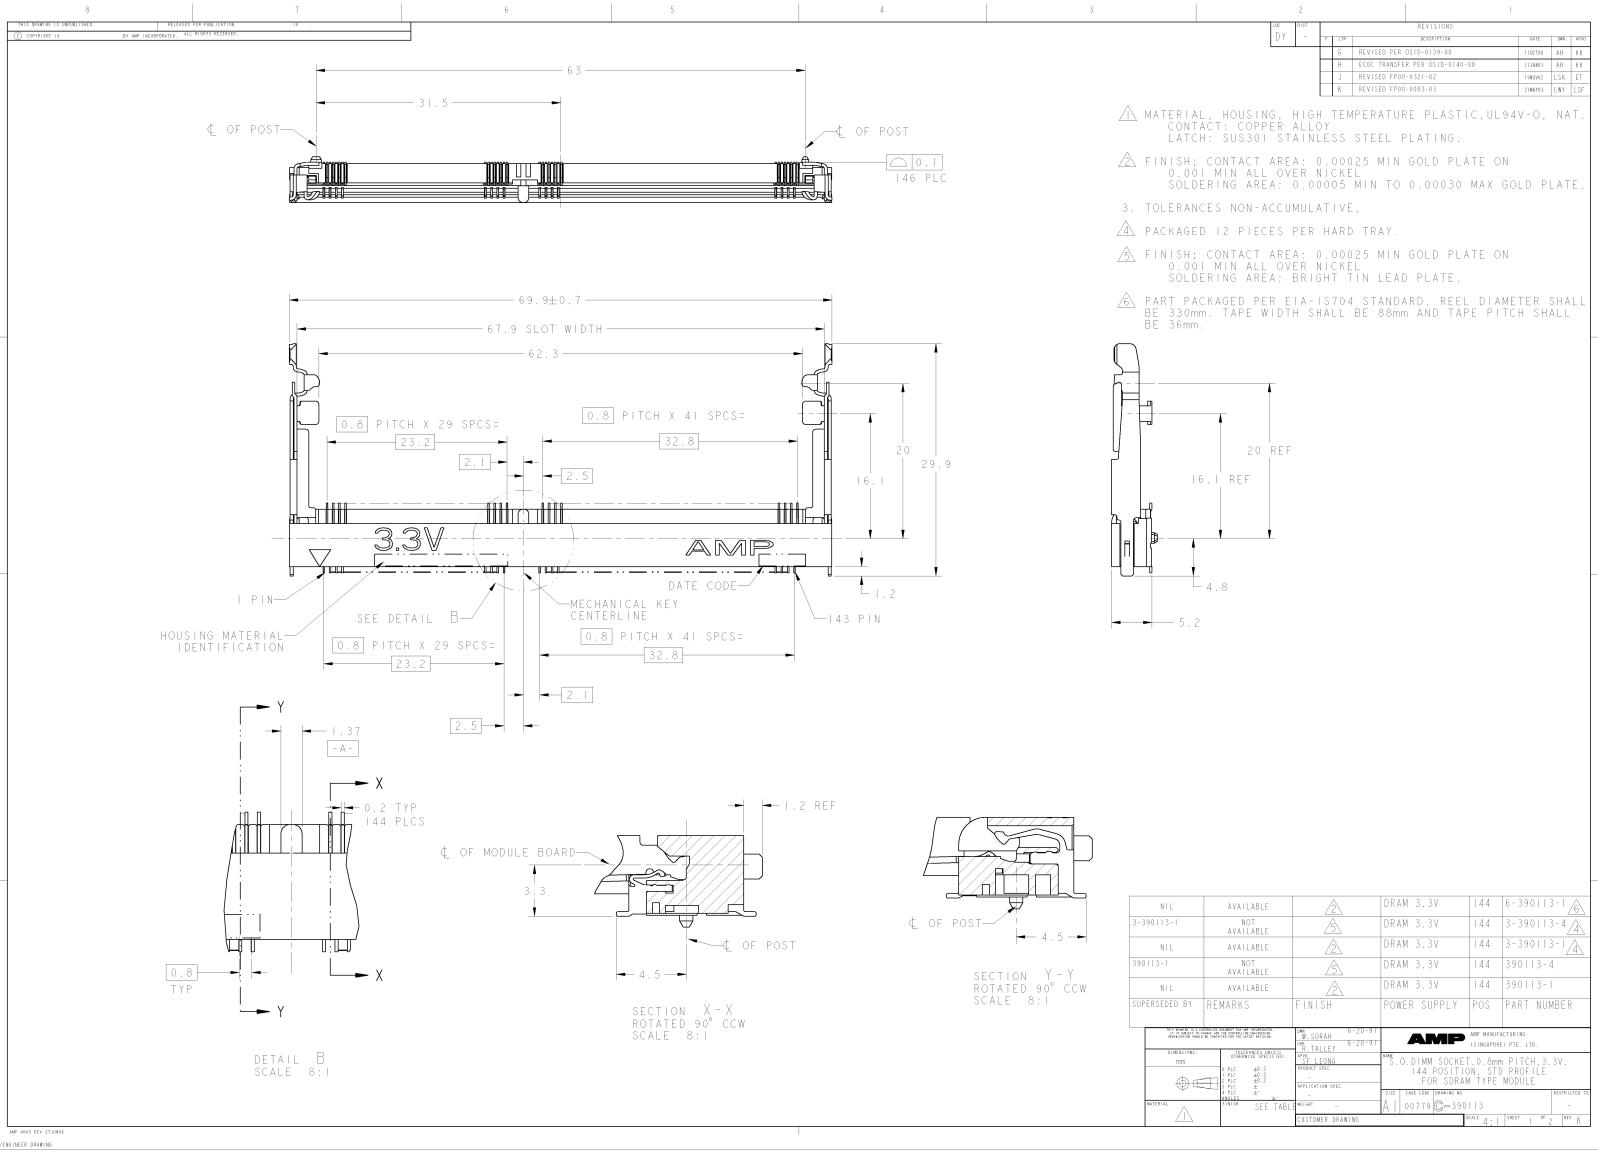

LTR	DESCRIPTION	DATE	DWN	APVD
G	REVISED PER OSID-0139-00	11OCT00	AH	KK
H	ECOC TRANSFER PER OSID-0140-00	11JAN01	AH	KK
J	REVISED FP00-0321-02	19NOV02	LSK	EF
K	REVISED FP00-0083-03	21NOV03	LNY	LSF

1. MATERIAL, HOUSING, HIGH TEMPERATURE PLASTIC, UL94V-O, NAT.
   CONTACT: COPPER ALLOY
   LATCH: SUS301 STAINLESS STEEL PLATING.
2. FINISH; CONTACT AREA: 0.00025 MIN GOLD PLATE ON 0.001 MIN ALL OVER NICKEL
   SOLDERING AREA: 0.00005 MIN TO 0.00030 MAX GOLD PLATE.
3. TOLERANCES NON-ACCUMULATIVE.
4. PACKAGED 12 PIECES PER HARD TRAY.
5. FINISH; CONTACT AREA: 0.00025 MIN GOLD PLATE ON 0.001 MIN ALL OVER NICKEL
   SOLDERING AREA: BRIGHT TIN LEAD PLATE.
6. PART PACKAGED PER EIA-IS704 STANDARD. REEL DIAMETER SHALL BE 330mm. TAPE WIDTH SHALL BE 88mm AND TAPE PITCH SHALL BE 36mm.

SUPERSEDED BY	REMARKS	FINISH	POWER SUPPLY	POS	PART NUMBER
NIL	AVAILABLE	2	DRAM 3.3V	144	6-390113-1 6
3-390113-1	NOT AVAILABLE	5	DRAM 3.3V	144	3-390113-4 4
NIL	AVAILABLE	2	DRAM 3.3V	144	3-390113-1 4
390113-1	NOT AVAILABLE	5	DRAM 3.3V	144	390113-4
NIL	AVAILABLE	2	DRAM 3.3V	144	390113-1

AMP MANUFACTURING
ISINGAPORE1 PTE. LTD.

S.O.DIMM SOCKET, 0.8mm PITCH, 3.3V, 144 POSITION, STD PROFILE FOR SDRAM TYPE MODULE

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-390113 | RESTRICTED TO -

SCALE 4:1 | SHEET 1 OF 2 | REV K

CUSTOMER DRAWING

AMP 4005 REV 27JUN95

Pro/ENGINEER DRAWING

Downloaded from Elcodis.com electronic components distributor

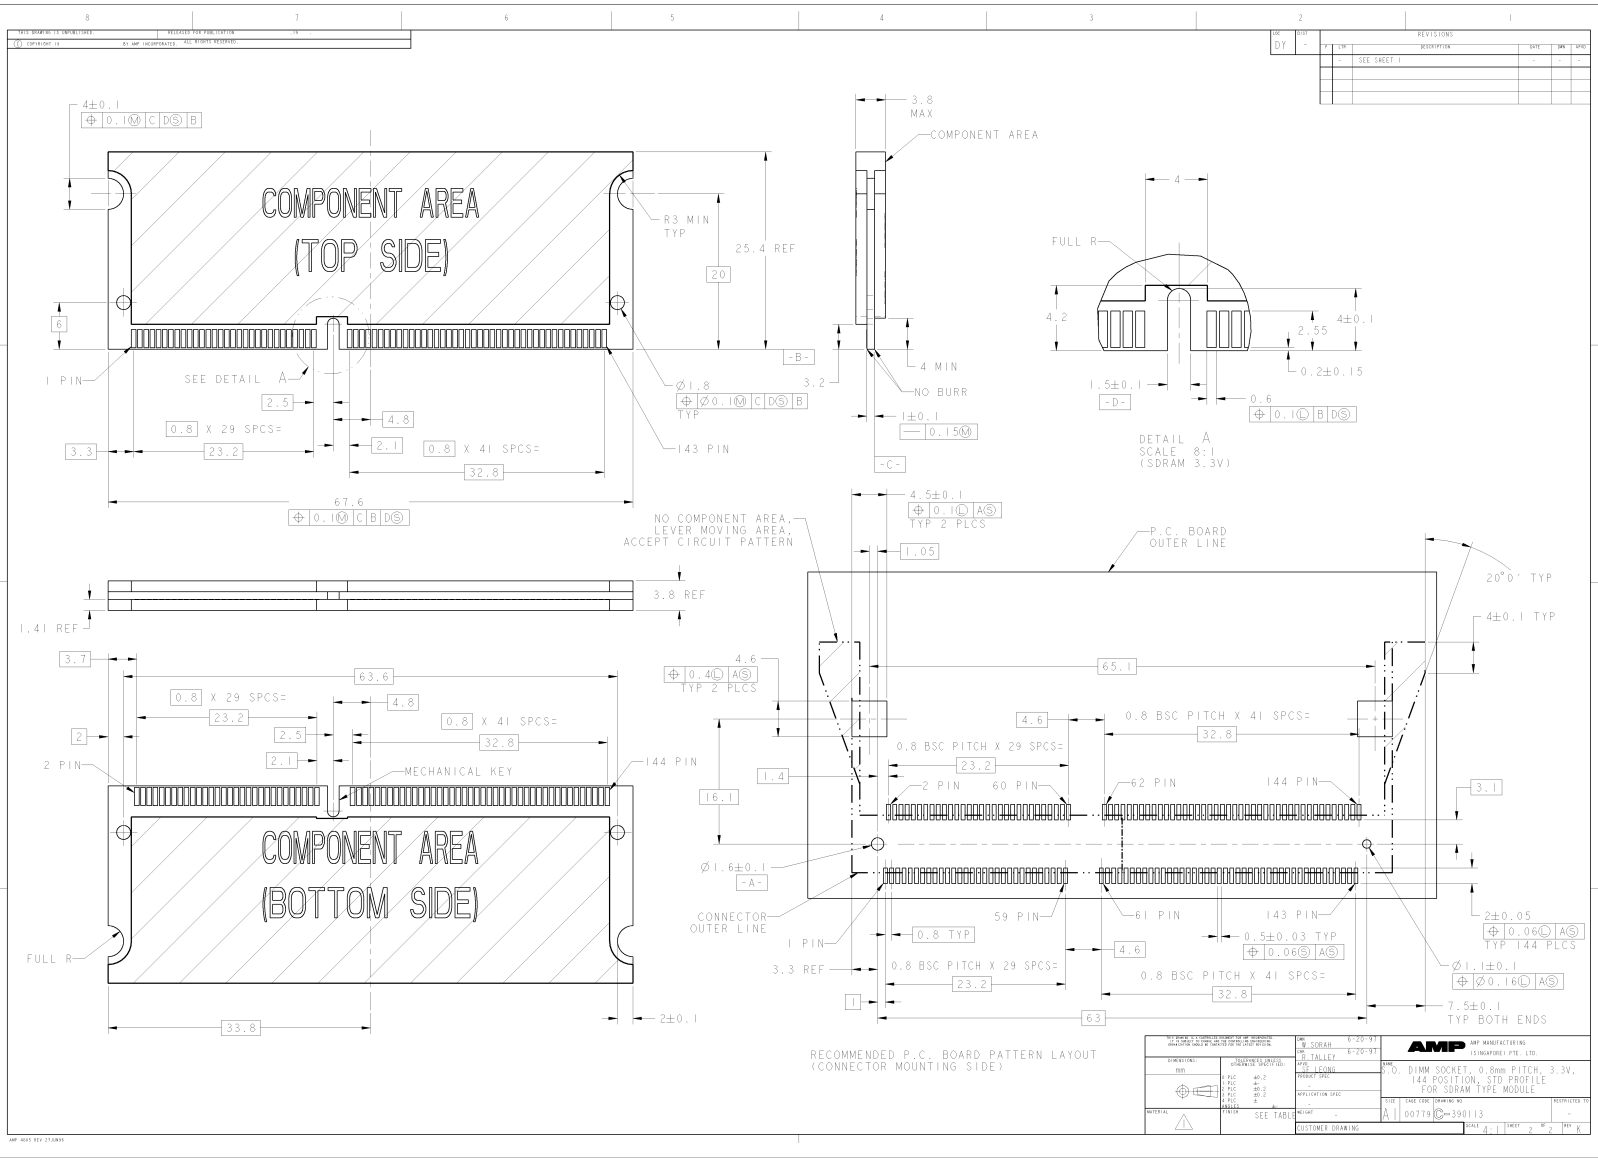

Downloaded from Elcodis.com electronic components distributor