


# 120 Amp Schottky Rectifier

## HS12380–HS123100

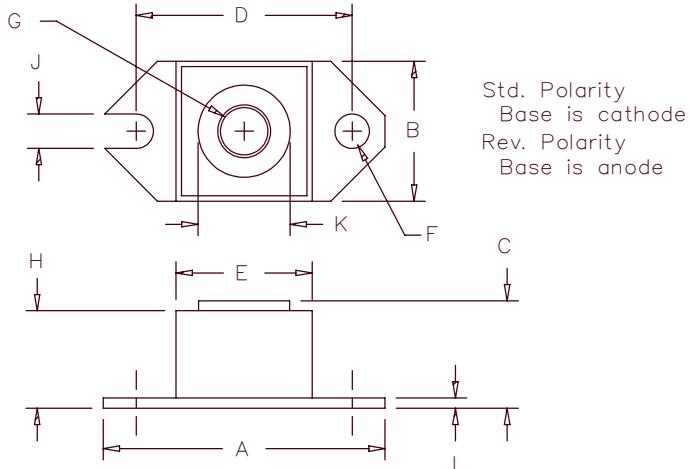

| Dim. | Inches  |         | Millimeter    |         | Notes |
|------|---------|---------|---------------|---------|-------|
|      | Minimum | Maximum | Minimum       | Maximum |       |
| A    | 1.52    | 1.56    | 38.86         | 39.62   |       |
| B    | .725    | .775    | 18.42         | 19.69   |       |
| C    | .605    | .625    | 15.37         | 15.88   |       |
| D    | 1.182   | 1.192   | 30.02         | 30.28   |       |
| E    | .745    | .755    | 18.92         | 19.18   | Sq.   |
| F    | .152    | .160    | 3.86          | 4.06    | Dia.  |
| G    |         |         | 1/4-20 UNC-2B |         |       |
| H    | .570    | .580    | 14.49         | 14.73   |       |
| J    | .156    | .160    | 3.96          | 4.06    |       |
| K    | .495    | .505    | 12.57         | 12.83   | Dia.  |
| L    | .120    | .130    | 3.05          | 3.30    |       |

| Microsemi Catalog Number | Industry Part Number  | Working Reverse Voltage | Peak Reverse Voltage | Repetitive Reverse Voltage |
|--------------------------|-----------------------|-------------------------|----------------------|----------------------------|
| HS12380*                 | 123NQ080<br>MBR12080  |                         | 80V                  | 80V                        |
| HS12390*                 |                       |                         | 90V                  | 90V                        |
| HS123100*                | 123NQ100<br>MBR120100 |                         | 100V                 | 100V                       |

\*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 120 Amperes/80 to 100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

### Electrical Characteristics

|                                    |                             |  |
|------------------------------------|-----------------------------|--|
| Average forward current            | I <sub>F(AV)</sub> 120 Amps | T <sub>C</sub> = 112°C, Square wave, R <sub>θJC</sub> = 0.40°C/W |
| Maximum surge current              | I <sub>FSM</sub> 2000 Amps  | 8.3ms, half sine, T <sub>J</sub> = 175°C                         |
| Maximum repetitive reverse current | I <sub>R(OV)</sub> 2 Amps   | f = 1 KHZ, 25°C, 1 μsec square wave                              |
| Max peak forward voltage           | V <sub>FM</sub> .76 Volts   | I <sub>FM</sub> = 120A; T <sub>J</sub> = 125°C*                  |
| Max peak forward voltage           | V <sub>FM</sub> 0.91 Volts  | I <sub>FM</sub> = 120A; T <sub>J</sub> = 25°C*                   |
| Max peak reverse current           | I <sub>RM</sub> 75 mA       | V <sub>RRM</sub> , T <sub>J</sub> = 125°C*                       |
| Max peak reverse current           | I <sub>RM</sub> 3.0 mA      | V <sub>RRM</sub> , T <sub>J</sub> = 25°C                         |
| Typical junction capacitance       | C <sub>J</sub> 3000 pF      | V <sub>R</sub> = 5.0V, T <sub>C</sub> = 25°C                     |

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

|                                      |                  |                               |
|--------------------------------------|------------------|-------------------------------|
| Storage temp range                   | T <sub>TG</sub>  | -55°C to 175°C                |
| Operating junction temp range        | T <sub>J</sub>   | -55°C to 175°C                |
| Max thermal resistance per leg       | R <sub>OJC</sub> | 0.40°C/W Junction to case     |
| Typical thermal resistance (greased) | R <sub>OCS</sub> | 0.12°C/W Case to sink         |
| Terminal Torque                      |                  | 35–40 inch pounds             |
| Mounting Base Torque                 |                  | 20–25 inch pounds             |
| Weight                               |                  | 1.1 ounces (32 grams) typical |

# HS12380 – HS123100

Figure 1  
Typical Forward Characteristics

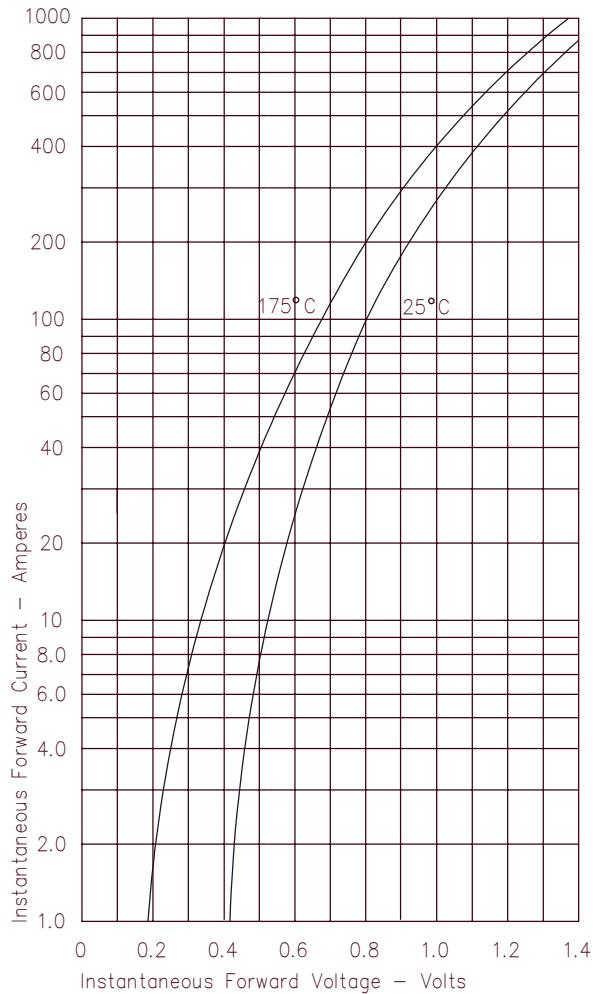


Figure 3  
Typical Junction Capacitance

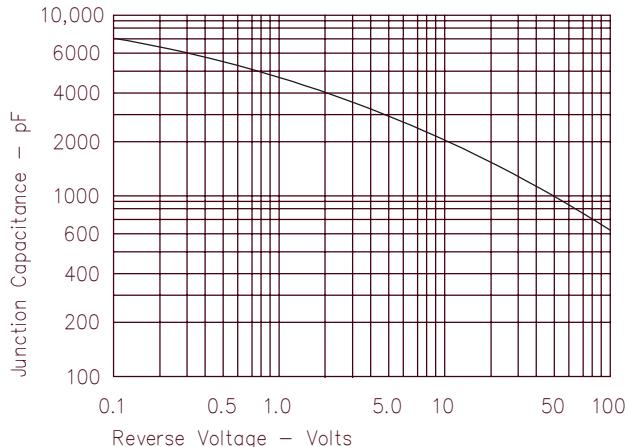


Figure 4  
Forward Current Derating

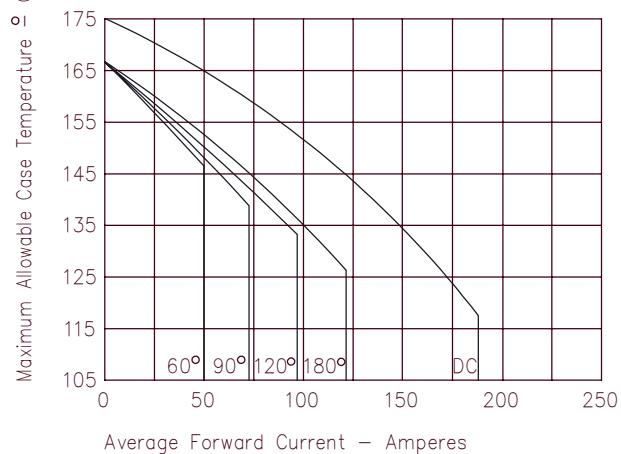


Figure 2  
Typical Reverse Characteristics

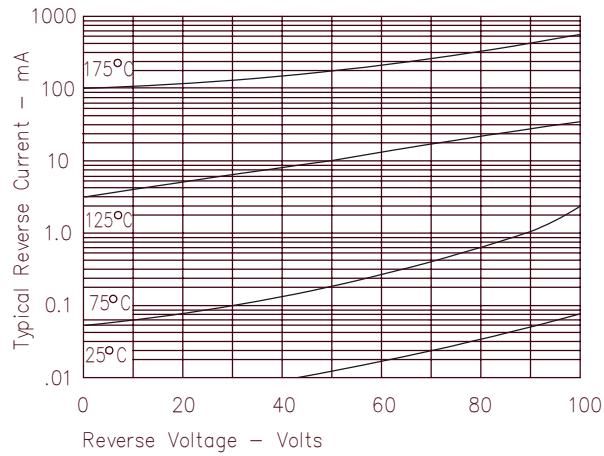


Figure 5  
Maximum Forward Power Dissipation

