
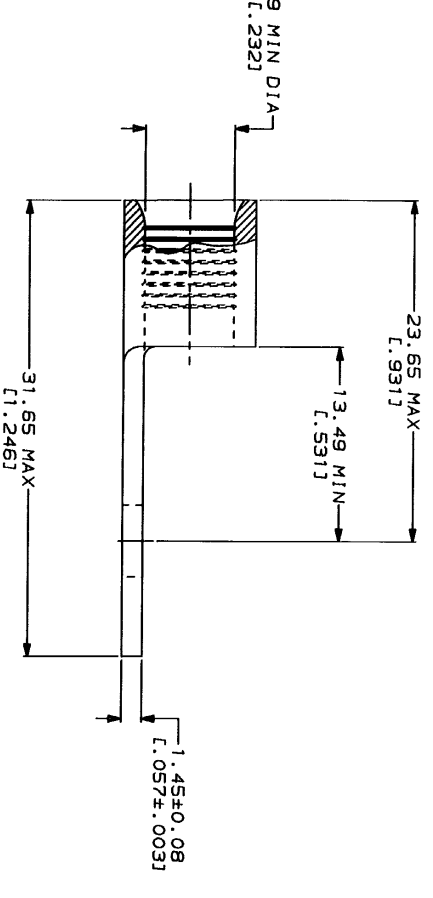


AMP WIRE RANGE	IL E13288 Listed
6 AWG SOLID OR STRANDED	6 AWG STRANDED
6 AWG SOLID OR STRANDED	MILITARY P/N AND CLASS NOT APPLICABLE

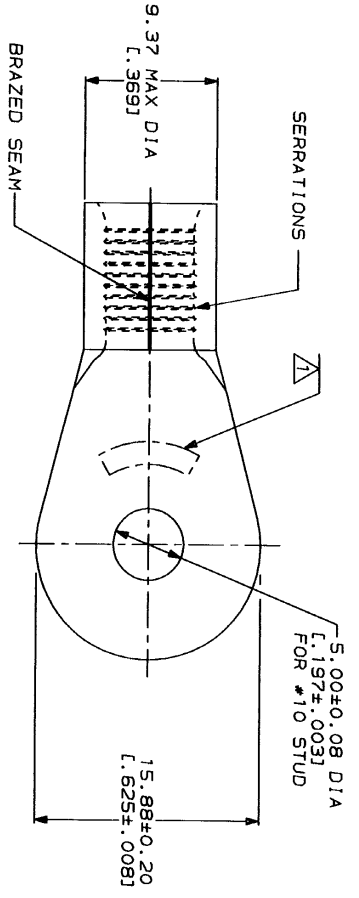

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION
FOR ORDER ENTRY
1-800-722-1111
1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
10.5-16.8mm² (20,800-33,100) CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN MILLIMETERS
TOLERANCES ON:
3 DEC 4 -
ANGLES
MATERIAL
COPPER PER
ASTM B-152
ANNEALED

FINISH
TIN PLATE
0.00254L(000100) MIN
THK PER MIL-T-10727

50	LOOSE PIECE, BOX	B-33464-2
750	TAPE MOUNTED	2-33464-2
	LOOSE PIECE	33464

AMP
AMP Incorporated
Harrisburg, PA 17105-3608

NAME
TERMINAL, RING TONGUE,
SOLISTRAND™

SIZE
00779
CAGE CODE
DRAWING NO
G-33464

SCALE
4:1
SHEET
1 OF 1

CUSTOMER DRAWING