


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14		T1	REV PER ECR 06-001832	22APR06	JR	TM

<b>AMP</b> WIRE RANGE	E13288	LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED

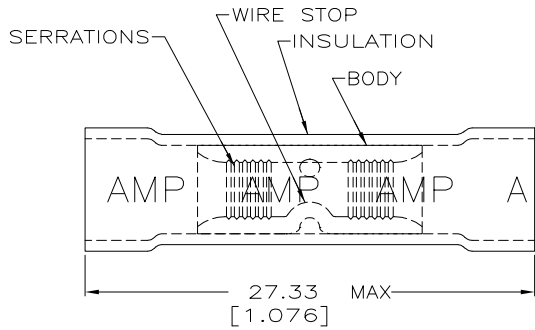

1. WIRE INSUL DIA,  
2.67-3.56 [.105-.140]
- PRELIMINARY - NOT FOR PRODUCTION.

10,000	LOOSE PIECE, BULK	34070-3
50	LOOSE PIECE, BAG	8-34070-5
5	LOOSE PIECE, BLS	8-34070-4
100	LOOSE PIECE, BOX	8-34070-1
2500	ON TAPE, REEL	1-34070-1
1000	LOOSE PIECE	34070
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 90° C [194° F]	<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN M ELLIS 19JUL95	AMP Incorporated Harrisburg, PA 17105-3608  <b>SPLICE, BUTT, PLASTI-GRIP</b> <b>WIRE SIZE, 22-16 AWG</b>
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX 1000V (FIXTURES OR SIGNS)	DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	CHK C PRESNELL 19JUL95	
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 0.26mm <sup>2</sup> -1.65mm <sup>2</sup> [509-3260]		MATERIAL BODY, CU ASTM B 152 SLV, PVC, COLOR, RED	APVD S BORTNER 19JUL95	
FOR ORDER ENTRY	1-800-526-5142		FINISH TIN PLATE PER MIL-T-10727	NAME UL486A APPLICATION SPEC	SIZE A3	
AMP 1470-19 REV 09MAY94 Translated 021119.113012 (YYMMD.HMMSS) from Computervision, Inc., Medusa Revision 12.2.5T					WEIGHT -	DRAWING NO 34070
					CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV T1