

SMG Series

- Endurance : 2,000 hours at 85°C
- Solvent resistant type except 315 to 450V_{dc}
(see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant





◆ SPECIFICATIONS

Items	Characteristics												
Category	-40 to +85°C(6.3 to 400V _{dc}) -25 to +85°C(450V _{dc})												
Temperature Range													
Rated Voltage Range	6.3 to 450V _{dc}												
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)												
Leakage Current	6.3 to 100V _{dc}						160 to 450V _{dc}						
	≤φ18	I=0.03CV or 4μA, whichever is greater. (at 20°C after 1 minute)						CV \ Time		After 1 minute		After 5 minutes	
								CV ≤ 1,000		I=0.1CV+40 max.		I=0.03CV+15 max.	
								CV > 1,000		I=0.04CV+100 max.		I=0.02CV+25 max.	
≥φ20	I=0.03CV						(at 20°C after 3 minutes)						
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)													
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V	
	tanδ (Max.)	≤φ18	0.34	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.20	0.24	0.24
		≥φ20	0.28	0.24	0.20	0.16	0.14	0.12	0.09	0.08	0.15	0.15	0.20
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)													
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	315 to 400V	450V	
	Z(-25°C)/Z(+20°C)	≤φ18	5	4	3	2	2	2	2	2	3	6	6
		≥φ20	5	4	3	2	2	2	2	2	4	6	6
Z(-40°C)/Z(+20°C)	≤φ18	12	10	8	5	4	3	3	3	4	6	-	
(at 120Hz)													
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.												
	Capacitance change	≤±20% of the initial value											
	D.F. (tanδ)	≤200% of the initial specified value											
	Leakage current	≤The initial specified value											
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.												
	Rated voltage	6.3 to 100V _{dc}						160 to 450V _{dc}					
	Capacitance change	≤±20% of the initial value						≤±20% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value						≤200% of the initial specified value					
	Leakage current	≤The initial specified value						≤500% of the initial specified value					


◆ DIMENSIONS [mm]

- Terminal Code : E

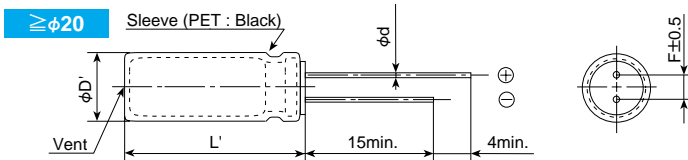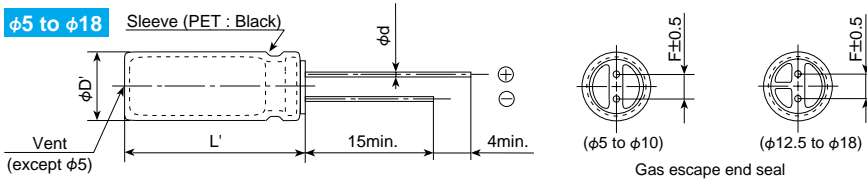

φD	5	6.3	8	10	12.5	16	18	20	22	25.4
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
φD'	φD+0.5max.							φD+0.5max.		
L'	L+1.5max.							L+2.0max.		

◆ PART NUMBERING SYSTEM

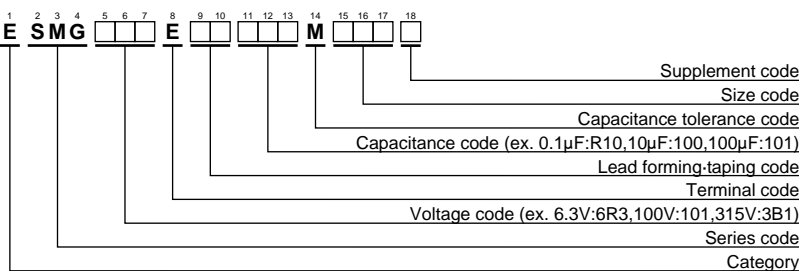

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.
6.3	220	5X11	0.34	200	ESMG6R3E□□221ME11D	25	5,600	20X30	0.24	2,430	ESMG250E□□562MN30S
	330	6.3X11	0.34	270	ESMG6R3E□□331MF11D		6,800	18X35.5	0.26	2,880	ESMG250E□□682MMP1S
	470	6.3X11	0.34	320	ESMG6R3E□□471MF11D		6,800	20X35	0.26	2,680	ESMG250E□□682MN35S
	1,000	8X11.5	0.34	540	ESMG6R3E□□102MHB5D		6,800	22X30	0.26	2,510	ESMG250E□□682MP30S
	2,200	10X20	0.36	1,000	ESMG6R3E□□222MJ20S		8,200	20X40	0.30	2,810	ESMG250E□□822MN40S
	3,300	10X20	0.38	1,185	ESMG6R3E□□332MJ20S		8,200	22X35	0.30	2,810	ESMG250E□□822MP35S
	4,700	12.5X20	0.40	1,545	ESMG6R3E□□472MK20S		10,000	22X40	0.34	3,240	ESMG250E□□103MP40S
	6,800	12.5X25	0.44	1,915	ESMG6R3E□□682MK25S		12,000	22X40	0.38	3,240	ESMG250E□□123MP40S
	10,000	16X25	0.52	2,330	ESMG6R3E□□103ML25S		15,000	25.4X40	0.44	3,610	ESMG250E□□153MQ40S
	10,000	20X25	0.46	2,310	ESMG6R3E□□103MN25S		47	5X11	0.14	130	ESMG350E□□470ME11D
	15,000	16X35.5	0.62	2,845	ESMG6R3E□□153MLP1S	100	6.3X11	0.14	210	ESMG350E□□101MF11D	
	15,000	20X30	0.56	2,660	ESMG6R3E□□153MN30S	220	8X11.5	0.14	385	ESMG350E□□221MHB5D	
	18,000	20X35	0.62	2,890	ESMG6R3E□□183MN35S	330	10X12.5	0.14	490	ESMG350E□□331MJC5S	
	18,000	22X30	0.62	2,860	ESMG6R3E□□183MP30S	470	10X16	0.14	645	ESMG350E□□471MJ16S	
	22,000	18X40	0.76	3,320	ESMG6R3E□□223MM40S	1,000	12.5X20	0.14	1,145	ESMG350E□□102MK20S	
	22,000	20X40	0.70	3,130	ESMG6R3E□□223MN40S	2,200	16X25	0.16	1,785	ESMG350E□□222ML25S	
	22,000	22X35	0.70	3,130	ESMG6R3E□□223MP35S	2,200	20X20	0.16	1,670	ESMG350E□□222MN20S	
	27,000	22X40	0.80	3,280	ESMG6R3E□□273MP40S	3,300	16X35.5	0.18	2,275	ESMG350E□□332MLP1S	
	39,000	25.4X40	1.04	3,560	ESMG6R3E□□393MQ40S	3,300	20X25	0.18	2,050	ESMG350E□□332MN25S	
	10	220	5X11	0.24	240	ESMG100E□□221ME11D	3,900	20X30	0.18	2,310	ESMG350E□□392MN30S
330		6.3X11	0.24	290	ESMG100E□□331MF11D	4,700	18X35.5	0.20	2,700	ESMG350E□□472MMP1S	
470		6.3X11	0.24	350	ESMG100E□□471MF11D	4,700	20X35	0.20	2,510	ESMG350E□□472MN35S	
1,000		10X12.5	0.24	650	ESMG100E□□102MJC5S	4,700	22X30	0.20	2,380	ESMG350E□□472MP30S	
2,200		10X20	0.26	1,070	ESMG100E□□222MJ20S	5,600	20X40	0.22	2,690	ESMG350E□□562MN40S	
3,300		12.5X20	0.28	1,420	ESMG100E□□332MK20S	5,600	22X35	0.22	2,690	ESMG350E□□562MP35S	
4,700		12.5X25	0.30	1,780	ESMG100E□□472MK25S	6,800	22X40	0.24	3,090	ESMG350E□□682MP40S	
6,800		16X25	0.34	2,220	ESMG100E□□682ML25S	10,000	25.4X40	0.32	3,480	ESMG350E□□103MQ40S	
6,800		20X20	0.34	2,080	ESMG100E□□682MN20S	0.10	5X11	0.12	1.3	ESMG500E□□R10ME11D	
10,000		16X35.5	0.42	2,670	ESMG100E□□103MLP1S	0.22	5X11	0.12	2.9	ESMG500E□□R22ME11D	
10,000		20X25	0.42	2,410	ESMG100E□□103MN25S	0.33	5X11	0.12	4.3	ESMG500E□□R33ME11D	
12,000		20X30	0.46	2,620	ESMG100E□□123MN30S	0.47	5X11	0.12	6.2	ESMG500E□□R47ME11D	
15,000		18X35.5	0.52	3,080	ESMG100E□□153MMP1S	1.0	5X11	0.12	17	ESMG500E□□R10ME11D	
15,000		20X35	0.52	2,870	ESMG100E□□153MN35S	2.2	5X11	0.12	28	ESMG500E□□R22ME11D	
15,000		22X30	0.52	2,660	ESMG100E□□153MP30S	3.3	5X11	0.12	35	ESMG500E□□R33ME11D	
18,000		22X35	0.58	3,050	ESMG100E□□183MP35S	4.7	5X11	0.12	41	ESMG500E□□R47ME11D	
22,000		22X40	0.66	3,480	ESMG100E□□223MP40S	10	5X11	0.12	60	ESMG500E□□100ME11D	
33,000		25.4X40	0.88	3,560	ESMG100E□□333MQ40S	22	5X11	0.12	95	ESMG500E□□220ME11D	
16		100	5X11	0.20	160	ESMG160E□□101ME11D	33	5X11	0.12	125	ESMG500E□□R330ME11D
		220	6.3X11	0.20	260	ESMG160E□□221MF11D	47	6.3X11	0.12	155	ESMG500E□□470MF11D
	330	8X11.5	0.20	370	ESMG160E□□331MHB5D	100	8X11.5	0.12	260	ESMG500E□□101MHB5D	
	470	8X11.5	0.20	440	ESMG160E□□471MHB5D	220	10X12.5	0.12	430	ESMG500E□□221MJC5S	
	1,000	10X16	0.20	785	ESMG160E□□102MJ16S	330	10X16	0.12	585	ESMG500E□□331MJ16S	
	2,200	12.5X20	0.22	1,295	ESMG160E□□222MK20S	470	10X20	0.12	755	ESMG500E□□471MJ20S	
	3,300	12.5X25	0.24	1,655	ESMG160E□□332MK25S	1,000	12.5X25	0.12	1,340	ESMG500E□□102MK25S	
	4,700	16X25	0.26	2,090	ESMG160E□□472ML25S	1,500	20X20	0.12	1,570	ESMG500E□□152MN20S	
	4,700	20X20	0.26	1,960	ESMG160E□□472MN20S	2,200	16X35.5	0.14	2,075	ESMG500E□□222MLP1S	
	6,800	16X31.5	0.30	2,520	ESMG160E□□682MLN3S	2,200	20X25	0.14	1,880	ESMG500E□□222MN25S	
	6,800	20X25	0.30	2,330	ESMG160E□□682MN25S	2,700	20X30	0.14	2,150	ESMG500E□□272MN30S	
	8,200	20X30	0.34	2,500	ESMG160E□□822MN30S	3,300	18X35.5	0.16	2,500	ESMG500E□□332MMP1S	
	10,000	18X35.5	0.38	2,920	ESMG160E□□103MMP1S	3,300	20X35	0.16	2,420	ESMG500E□□332MN35S	
	10,000	20X35	0.38	2,720	ESMG160E□□103MN35S	3,300	22X30	0.16	2,420	ESMG500E□□332MP30S	
	10,000	22X30	0.38	2,660	ESMG160E□□103MP30S	3,900	20X40	0.16	2,590	ESMG500E□□392MN40S	
	12,000	20X40	0.42	2,900	ESMG160E□□123MN40S	3,900	22X35	0.16	2,590	ESMG500E□□392MP35S	
	12,000	22X35	0.42	2,900	ESMG160E□□123MP35S	4,700	22X40	0.18	2,960	ESMG500E□□472MP40S	
	15,000	22X40	0.48	3,380	ESMG160E□□153MP40S	6,800	25.4X40	0.22	3,360	ESMG500E□□682MQ40S	
	22,000	25.4X40	0.62	3,720	ESMG160E□□223MQ40S	10	5X11	0.09	65	ESMG630E□□100ME11D	
	25	47	5X11	0.16	115	ESMG250E□□470ME11D	22	5X11	0.09	100	ESMG630E□□220ME11D
100		6.3X11	0.16	190	ESMG250E□□101MF11D	33	6.3X11	0.09	140	ESMG630E□□330MF11D	
220		8X11.5	0.16	330	ESMG250E□□221MHB5D	47	6.3X11	0.09	170	ESMG630E□□470MF11D	
330		8X11.5	0.16	440	ESMG250E□□331MHB5D	100	10X12.5	0.09	300	ESMG630E□□101MJC5S	
470		10X12.5	0.16	545	ESMG250E□□471MJC5S	220	10X16	0.09	490	ESMG630E□□221MJ16S	
1,000		10X20	0.16	955	ESMG250E□□102MJ20S	330	10X20	0.09	710	ESMG630E□□331MJ20S	
2,200		12.5X25	0.18	1,540	ESMG250E□□222MK25S	470	12.5X20	0.09	900	ESMG630E□□471MK20S	
3,300		16X25	0.20	1,975	ESMG250E□□332ML25S	820	20X20	0.09	1,370	ESMG630E□□821MN20S	
3,300		20X20	0.20	1,850	ESMG250E□□332MN20S	1,000	16X25	0.09	1,300	ESMG630E□□102ML25S	
4,700		16X31.5	0.22	2,420	ESMG250E□□472MLN3S	1,000	20X25	0.09	1,600	ESMG630E□□102MN25S	
4,700		20X25	0.22	2,420	ESMG250E□□472MN25S	1,500	20X30	0.09	1,850	ESMG630E□□152MN30S	

□ □ : Enter the appropriate lead forming or taping code.

◆STANDARD RATINGS

□ is not solvent resistant.

WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case size φDXL(mm)	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.
63	2,200	20X35	0.11	2,330	ESMG630E□□222MN35S	250	10	10X16	0.20	105	ESMG251E□□100MJ16S
	2,200	22X30	0.11	2,190	ESMG630E□□222MP30S		22	10X20	0.20	170	ESMG251E□□220MJ20S
	2,700	20X40	0.11	2,640	ESMG630E□□272MN40S		33	12.5X20	0.20	230	ESMG251E□□330MK20S
	3,300	22X40	0.13	2,810	ESMG630E□□332MP40S		47	12.5X25	0.20	295	ESMG251E□□470MK25S
	3,900	25.4X40	0.13	3,100	ESMG630E□□392MQ40S		82	20X20	0.15	420	ESMG251E□□820MN20S
100	0.10	5X11	0.08	2.1	ESMG101E□□R10ME11D		100	16X31.5	0.20	515	ESMG251E□□101MLN3S
	0.22	5X11	0.08	4.7	ESMG101E□□R22ME11D		100	20X25	0.15	490	ESMG251E□□101MN25S
	0.33	5X11	0.08	7.0	ESMG101E□□R33ME11D		120	20X25	0.15	530	ESMG251E□□121MN25S
	0.47	5X11	0.08	10	ESMG101E□□R47ME11D		180	20X30	0.15	680	ESMG251E□□181MN30S
	1.0	5X11	0.08	21	ESMG101E□□1R0ME11D		220	18X40	0.20	825	ESMG251E□□221MM40S
	2.2	5X11	0.08	30	ESMG101E□□2R2ME11D		220	20X35	0.15	780	ESMG251E□□221MN35S
	3.3	5X11	0.08	40	ESMG101E□□3R3ME11D		220	22X30	0.15	820	ESMG251E□□221MP30S
	4.7	5X11	0.08	45	ESMG101E□□4R7ME11D		270	20X40	0.15	880	ESMG251E□□271MN40S
	10	6.3X11	0.08	75	ESMG101E□□10MF11D		270	22X35	0.15	880	ESMG251E□□271MP35S
	22	8X11.5	0.08	130	ESMG101E□□220MHB5D		330	22X40	0.15	1,060	ESMG251E□□331MP40S
	33	8X11.5	0.08	180	ESMG101E□□330MHB5D		390	25.4X40	0.15	1,200	ESMG251E□□391MQ40S
	47	10X12.5	0.08	230	ESMG101E□□470MJC5S		47	20X20	0.15	310	ESMG3B1E□□470MN20S
	100	10X20	0.08	370	ESMG101E□□101MJ20S		68	20X25	0.15	400	ESMG3B1E□□680MN25S
	220	12.5X25	0.08	620	ESMG101E□□221MK25S		82	20X25	0.15	440	ESMG3B1E□□820MN25S
	330	12.5X25	0.08	760	ESMG101E□□331MK25S		100	20X30	0.15	500	ESMG3B1E□□101MN30S
	330	20X20	0.08	870	ESMG101E□□331MN20S	120	20X30	0.15	550	ESMG3B1E□□121MN30S	
	470	16X25	0.08	1,000	ESMG101E□□471ML25S	180	20X40	0.15	720	ESMG3B1E□□181MN40S	
	680	20X30	0.08	1,360	ESMG101E□□681MN30S	180	22X35	0.15	720	ESMG3B1E□□181MP35S	
	820	22X30	0.08	1,540	ESMG101E□□821MP30S	220	22X40	0.15	810	ESMG3B1E□□221MP40S	
	1,000	18X40	0.08	1,380	ESMG101E□□102MM40S	270	25.4X40	0.15	920	ESMG3B1E□□271MQ40S	
1,000	20X35	0.08	1,720	ESMG101E□□102MN35S	0.47	6.3X11	0.24	15	ESMG351E□□R47MF11D		
1,200	22X40	0.08	1,980	ESMG101E□□122MP40S	1.0	6.3X11	0.24	22	ESMG351E□□1R0MF11D		
1,800	25.4X40	0.08	2,490	ESMG101E□□182MQ40S	2.2	8X11.5	0.24	38	ESMG351E□□2R2MHB5D		
160	3.3	6.3X11	0.20	40	ESMG161E□□3R3MF11D	3.3	8X11.5	0.24	46	ESMG351E□□3R3MHB5D	
	4.7	6.3X11	0.20	48	ESMG161E□□4R7MF11D	4.7	10X12.5	0.24	65	ESMG351E□□4R7MJC5S	
	10	10X12.5	0.20	94	ESMG161E□□100MJC5S	10	10X20	0.24	115	ESMG351E□□100MJ20S	
	22	10X20	0.20	170	ESMG161E□□220MJ20S	22	12.5X20	0.24	185	ESMG351E□□220MK20S	
	33	10X20	0.20	205	ESMG161E□□330MJ20S	33	16X25	0.24	275	ESMG351E□□330ML25S	
	47	12.5X20	0.20	270	ESMG161E□□470MK20S	47	16X25	0.24	325	ESMG351E□□470ML25S	
	100	12.5X25	0.20	430	ESMG161E□□101MK25S	47	20X20	0.15	310	ESMG351E□□470MN20S	
	220	16X31.5	0.20	760	ESMG161E□□221MLN3S	68	20X25	0.15	400	ESMG351E□□680MN25S	
	220	20X25	0.15	730	ESMG161E□□221MN25S	100	18X31.5	0.24	530	ESMG351E□□101MMN3S	
	330	18X35.5	0.20	995	ESMG161E□□331MMP1S	100	20X30	0.15	500	ESMG351E□□101MN30S	
	330	20X30	0.15	920	ESMG161E□□331MN30S	120	20X35	0.15	560	ESMG351E□□121MN35S	
	390	20X35	0.15	1,160	ESMG161E□□391MN35S	220	25.4X40	0.15	890	ESMG351E□□221MQ40S	
	390	22X30	0.15	1,160	ESMG161E□□391MP30S	1.0	6.3X11	0.24	22	ESMG401E□□1R0MF11D	
	470	20X40	0.15	1,340	ESMG161E□□471MN40S	2.2	8X11.5	0.24	38	ESMG401E□□2R2MHB5D	
	470	22X35	0.15	1,340	ESMG161E□□471MP35S	3.3	10X12.5	0.24	54	ESMG401E□□3R3MJC5S	
560	22X40	0.15	1,470	ESMG161E□□561MP40S	4.7	10X16	0.24	71	ESMG401E□□4R7MJ16S		
680	25.4X40	0.15	1,570	ESMG161E□□681MQ40S	10	10X20	0.24	115	ESMG401E□□100MJ20S		
200	3.3	6.3X11	0.20	40	ESMG201E□□3R3MF11D	22	12.5X25	0.24	205	ESMG401E□□220MK25S	
	4.7	8X11.5	0.20	55	ESMG201E□□4R7MHB5D	33	16X25	0.24	275	ESMG401E□□330ML25S	
	10	10X12.5	0.20	94	ESMG201E□□100MJC5S	33	20X20	0.15	260	ESMG401E□□330MN20S	
	22	10X20	0.20	170	ESMG201E□□220MJ20S	47	16X31.5	0.24	350	ESMG401E□□470MLN3S	
	33	10X20	0.20	205	ESMG201E□□330MJ20S	56	20X25	0.15	350	ESMG401E□□560MN25S	
	47	12.5X20	0.20	270	ESMG201E□□470MK20S	68	20X30	0.15	420	ESMG401E□□680MN30S	
	100	16X25	0.20	475	ESMG201E□□101ML25S	100	20X35	0.15	520	ESMG401E□□101MN35S	
	100	20X20	0.15	460	ESMG201E□□101MN20S	100	22X30	0.15	520	ESMG401E□□101MP30S	
	180	20X25	0.15	660	ESMG201E□□181MN25S	120	20X40	0.15	580	ESMG401E□□121MN40S	
	220	18X35.5	0.20	810	ESMG201E□□221MMP1S	120	22X35	0.15	580	ESMG401E□□121MP35S	
	220	20X30	0.15	750	ESMG201E□□221MN30S	180	25.4X40	0.15	790	ESMG401E□□181MQ40S	
	270	20X30	0.15	830	ESMG201E□□271MN30S	2.2	10X12.5	0.24	32	ESMG451E□□2R2MJC5S	
	330	20X35	0.15	1,070	ESMG201E□□331MN35S	3.3	10X16	0.24	44	ESMG451E□□3R3MJ16S	
	330	22X30	0.15	1,070	ESMG201E□□331MP30S	4.7	10X20	0.24	56	ESMG451E□□4R7MJ20S	
	390	20X40	0.15	1,190	ESMG201E□□391MN40S	10	12.5X20	0.24	91	ESMG451E□□100MK20S	
390	22X30	0.15	1,160	ESMG201E□□391MP30S	22	16X25	0.24	165	ESMG451E□□220ML25S		
470	22X40	0.15	1,350	ESMG201E□□471MP40S	22	20X20	0.20	180	ESMG451E□□220MN20S		
560	22X40	0.15	1,430	ESMG201E□□561MP40S	33	16X31.5	0.24	215	ESMG451E□□330MLN3S		
680	25.4X40	0.15	1,620	ESMG201E□□681MQ40S	33	20X25	0.20	240	ESMG451E□□330MN25S		
250	2.2	6.3X11	0.20	32	ESMG251E□□2R2MF11D	47	16X35.5	0.24	265	ESMG451E□□470MLP1S	
	3.3	8X11.5	0.20	46	ESMG251E□□3R3MHB5D	47	20X25	0.20	290	ESMG451E□□470MN25S	
	4.7	8X11.5	0.20	55	ESMG251E□□4R7MHB5D	56	20X30	0.20	320	ESMG451E□□560MN30S	

□ : Enter the appropriate lead forming or taping code.

◆STANDARD RATINGS

is not solvent resistant.

WV (Vdc)	Cap (μF)	Case size φD×L(mm)	tanδ	Rated ripple current (mA _{rms} /85°C, 120Hz)	Part No.
450	68	20×35	0.20	370	ESMG451E□□680MN35S
	68	22×30	0.20	370	ESMG451E□□680MP30S
	82	20×40	0.20	420	ESMG451E□□820MN40S
	82	22×35	0.20	420	ESMG451E□□820MP35S
	100	22×40	0.20	470	ESMG451E□□101MP40S
	120	25.4×40	0.20	520	ESMG451E□□121MQ40S

□□ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

(φ5 to φ18)

Capacitance (μF)	Frequency (Hz)					
	50	120	300	1k	10k	100k
0.1 to 4.7	0.65	1.00	1.35	1.75	2.30	2.50
10 to 47	0.75	1.00	1.25	1.50	1.75	1.80
100 to 1,000	0.80	1.00	1.15	1.30	1.40	1.50
2,200 to	0.85	1.00	1.03	1.05	1.08	1.08

(φ20 to φ25.4)

Rated Voltage (V _{dc})	Frequency (Hz)					
	50	120	300	1k	10k	100k
6.3 to 50	0.95	1.00	1.03	1.05	1.08	1.08
63 to 100	0.92	1.00	1.07	1.13	1.19	1.20
160 to 250	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450	0.77	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.