

| Material | High Conductivity Seamless Copper Tube | |
|---|--|--|
| Plating | Electro-Tin | |
| Wire Size | 2 AWG | 38 R Ref |
| Wire Type | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric | ANDUIT PART OF THE STREET PART O |
| Wire Strip Length | 1-1/4 in. | NA PAR COSTS |
| Stud Size | 1/4 in. | 27.02.04 |
| UL Listed Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | .25±.04 |
| UL Temperature Rating | 90° C | |
| C.S.A Certified Wire Connector | Yes | |
| Panduit Color Code on Barrel | BROWN | |
| Panduit Die Index No. on Barrel | P33 | - 1.16±. |
| Alternate Industry Die Index No. () on Barrel | (10) | |





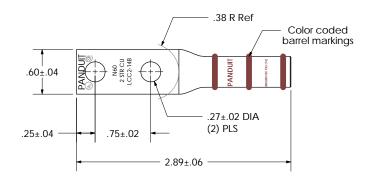

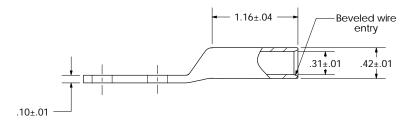

| | | | | | | CORP. TINLEY PARK, ILLINOIS |
|-----|-------|-----|-----|-------------|-------|---|
| | | | | | | LCC2-14B-Q |
| 00 | 12/02 | SAB | DRL | RELEASED | 10333 | Copper Lug - Two-Hole, Long Barrel |
| REV | DATE | BY | СНК | DESCRIPTION | ECN | N/A DRAWING NO / CAD FILE LCC2-14B-CUST |