



Wiha. Premium Tools
for Professionals.

Wiha SoftFinish® electric. The Safe & Comfortable Insulated VDE Screwdriver.




   **1000 V**
EN 60900



Insulation moulded directly onto blade offers maximum safety.



Ergonomic handle geometry with SoftFinish® surface gives highest possible comfort.

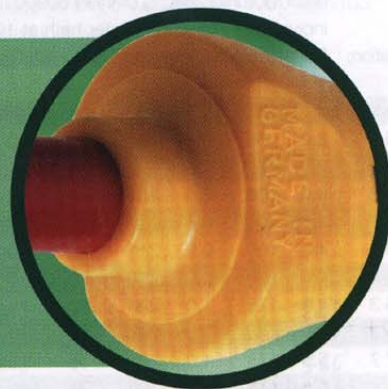


Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1500 V DC or 1000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10.000 Volts according to DIN EN 60900.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications. Furthermore, the exclusive SoftFinish® handle shape allows maximum user comfort.

SoftFinish® electric Advantages:

- Insulation moulded directly onto blade
- Tested to the professional GS Standard
- Safety when working up to 1000 V AC and 1500 V DC
- Each screwdriver is individually tested in a water bath at 10.000 Volts according to DIN EN 60900 (IEC 900)
- Multi-component SoftFinish® handle provides maximum user comfort
- Ergonomically perfect handle design
- Imprinted screw symbol on handle end for fast identification

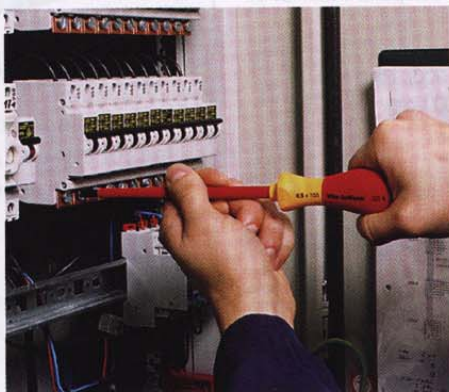



Wiha. Premium Tools
for Professionals.

Wiha SoftFinish® electric. The Safe & Comfortable Insulated VDE Screwdriver.

For Slotted & Phillips Screws.



320 N VDE Slotted Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7437, DIN 5264, ISO 2380.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

| Order-No. | DI | — | + | — | + | — | |
|-----------|----|------|-----|-----|-----|----|----|
| 00819 | 2 | 60 | 0.4 | 164 | 23 | 10 | |
| 00820 | 8 | 2.5 | 75 | 0.4 | 179 | 23 | 10 |
| 00821 | 5 | 3.0 | 100 | 0.5 | 204 | 23 | 10 |
| 00822 | 2 | 3.5 | 100 | 0.6 | 204 | 23 | 10 |
| 00823 | 9 | 4.0 | 100 | 0.8 | 211 | 30 | 10 |
| 00824 | 6 | 4.5 | 125 | 1.0 | 236 | 30 | 10 |
| 00825 | 3 | 4.5 | 175 | 1.0 | 286 | 30 | 10 |
| 00826 | 0 | 5.5 | 125 | 1.0 | 243 | 36 | 10 |
| 00827 | 7 | 5.5 | 175 | 1.0 | 293 | 36 | 10 |
| 00828 | 4 | 6.0 | 150 | 1.2 | 268 | 36 | 10 |
| 00829 | 1 | 6.5 | 150 | 1.2 | 268 | 36 | 10 |
| 00830 | 7 | 8.0 | 175 | 1.2 | 299 | 41 | 10 |
| 00831 | 4 | 8.0 | 175 | 1.6 | 299 | 41 | 10 |
| 00832 | 1 | 10.0 | 200 | 1.6 | 324 | 41 | 10 |

• Non-DIN sizes.

For Pozidriv Screws.



324 VDE Pozidriv Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7438, ISO 8764.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

| Order-No. | + | — | + | — | + | — |
|-----------|---|---|-----|-----|----|----|
| 00877 | 2 | 0 | 60 | 164 | 23 | 10 |
| 00878 | 9 | 1 | 80 | 191 | 30 | 10 |
| 00879 | 6 | 2 | 100 | 218 | 36 | 10 |
| 00880 | 2 | 3 | 150 | 324 | 41 | 5 |



321 N VDE Phillips Screwdriver.

Insulation up to 1000 V AC, GS-Mark.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle, multi-component with roll-off protection.

Standards: DIN 7438, ISO 8764.
Manufactured acc. to DIN EN 60900 (IEC 900), each tool individually tested in a water bath at 10 000 Volts.

Application: For electrical applications up to 1000 V AC.

| Order-No. | + | — | + | — | + | — |
|-----------|---|---|-----|-----|----|----|
| 00846 | 8 | 0 | 60 | 164 | 23 | 10 |
| 00847 | 5 | 1 | 80 | 191 | 30 | 10 |
| 00848 | 2 | 2 | 100 | 218 | 36 | 10 |
| 00849 | 9 | 3 | 150 | 274 | 41 | 10 |
| 00850 | 5 | 4 | 200 | 324 | 41 | 5 |