


Master Varitemp[®] Heat Guns

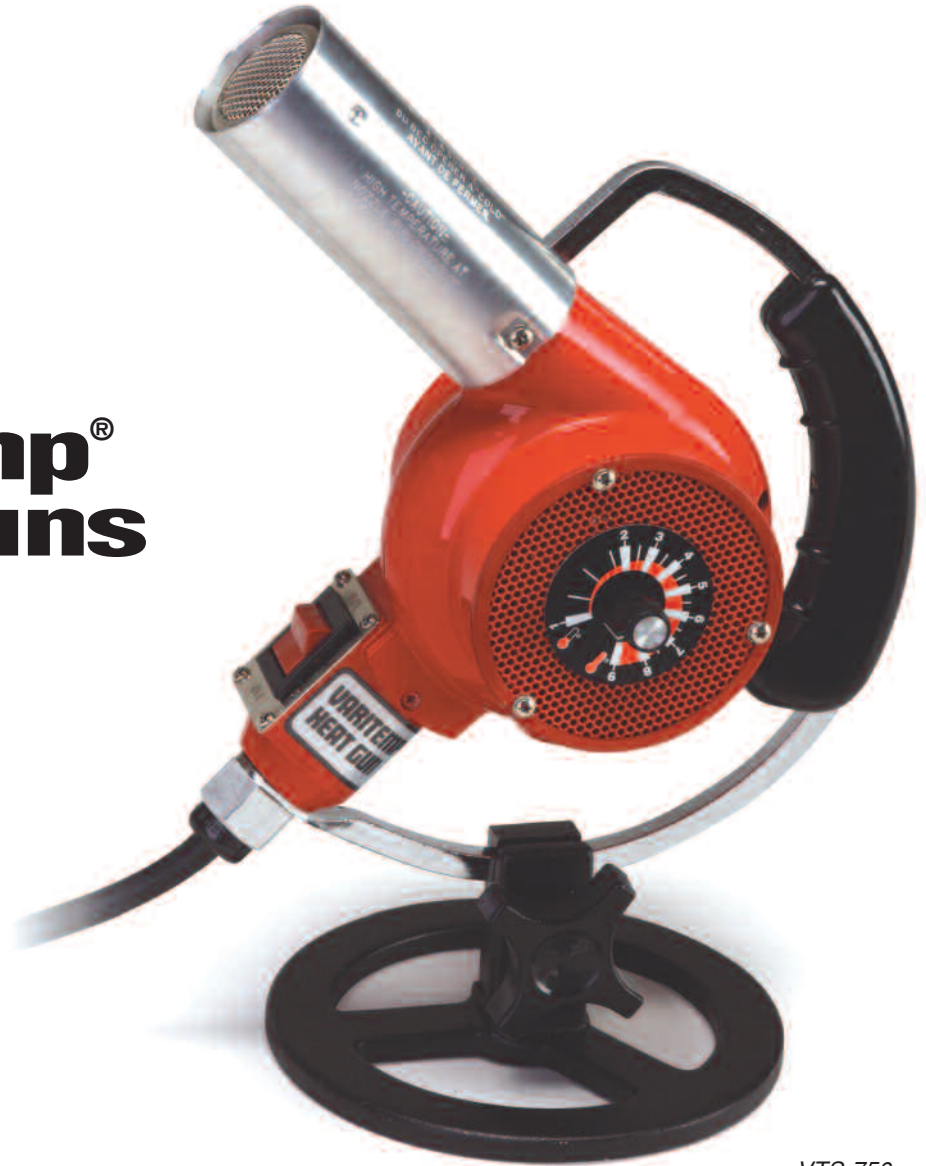

VTS-750
Deluxe Varitemp Heat Gun

- Varitemp Heat Guns use a powerful motor driven blower and durable electric heating element to produce a reliable stream of heated air. Power ratings up to 1,000°F /530°C at 1740 watts (120V) with air flow at 23 CFM means jobs get done faster.
- Made in the USA, these heavy duty, industrial quality heat guns offer the handiest, safest way to get fast, variable temperature flameless heat needed for thousands of uses in the factory, laboratory or workshop.
- Two unique Varitemp Heat Gun stand types, along with an exclusive electronic temperature control, enable you to easily find the right operating position and temperature for the most effective results for your application.
- A broad range of optional attachments make the Varitemp ideal for a wide variety of heating, shrinking and drying applications. The Varitemp Heat Gun Kit package combines storage, portability and popular attachments.

Varitemp® Heat Guns

Deluxe Varitemp Heat Gun with versatile hands-free stand

Stable, deluxe heavy-duty, metal stand with non-slip rubber feet, adjustable handle and spring loaded slide grip allow for easy selection of multiple pivoting angles for hands-free or hands-on use, providing the best balance and aim.

Varitemp Heat Guns:

- High temperature and power ratings: Up to 1000°F/540°C at 1740 watts
- Accommodates most industrial and commercial applications
- High air flow rating: 23 CFM at 3000 FPM gets the job done fast
- Powerful high speed universal motor
- Sturdy die cast aluminum housing is rugged and light weight
- Double protected heating element housing
- Easily replaceable, reinforced, mica-insulated ceramic heating element
- Externally accessible carbon brush holders for quick replacement
- Three position "OFF-COLD-HOT" rocker switch
- 6 foot, 3-wire grounded cordset made with flexible, oil and sunlight resistant rubber jacket.
- Variable temperature control provides easy dial-in temperature adjustment from ambient to 1000°F / 530°C
- UL Listed. Made in USA
- Use to shrink tubing and packaging, bend plastics, cure adhesives, dry and heat parts, strip paint, defrost frozen pipes, heat sensitive materials, solder/desolder and more




Pivoting handle and slide grip
with removable stand



Ergonomic handle with
spring loaded slide grip



Deluxe stand gives more
hands-free choices

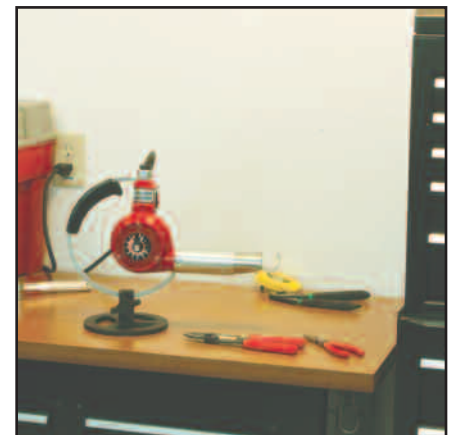

Perfect for bench top use
in manufacturing and repair

ORDERING INFORMATION

Model No. Description

VTS-750	Deluxe Varitemp Heat Gun, 1000°F/540°C Max, 120V
VTS-752	Deluxe Varitemp Heat Gun, 750°F/400°C Max, 220-240V
VT-750C	Varitemp Heat Gun, 1,000°F/540°C Max, 120V
VT-750CK	Varitemp Heat Gun Kit, 1,000°F/540°C Max, 120V with 3 Attachments & Case
VT-750C-MC	Varitemp Heat Gun with Momentary Contact Switch, 1,000°F/540°C Max, 120V
VT-752C	Varitemp Heat Gun, 750°F/400°C Max, 220-240V
HAS-043K	Replacement Heating Element for VTS-750, VT-750C, VT-750CK
HAS-014K	Replacement Heating Element for VTS-752, VT-752C
35257	Replacement Brush, Spring and Cap Kit (2 each)



Replacement Heating Element
Brush, Spring, and Cap (2 each)

www.masterappliance.com


Standard Varitemp® Heat Gun with pivoting hands-free stand

Standard VT Heat Guns have all of the features of the VTS Heat Gun shown on the opposite page.

Standard VT Models are manufactured with the traditional non-slip rubber-backed metal stand with 90° rotation and contoured well balanced handle.


VT-750C-MC comes with a Momentary Contact Safety Switch. This switch type immediately shuts off the heat gun when it is released, for added safety.

The Industrial Heat Gun was invented by Master Appliance in 1958. These rugged aluminum body heat guns set the quality standards for professional users. Today with multiple enhancements and accessories these heat guns are ever more useful and versatile. Quality and user replaceable parts help make your Master Heat Tool a reliable partner in your success.

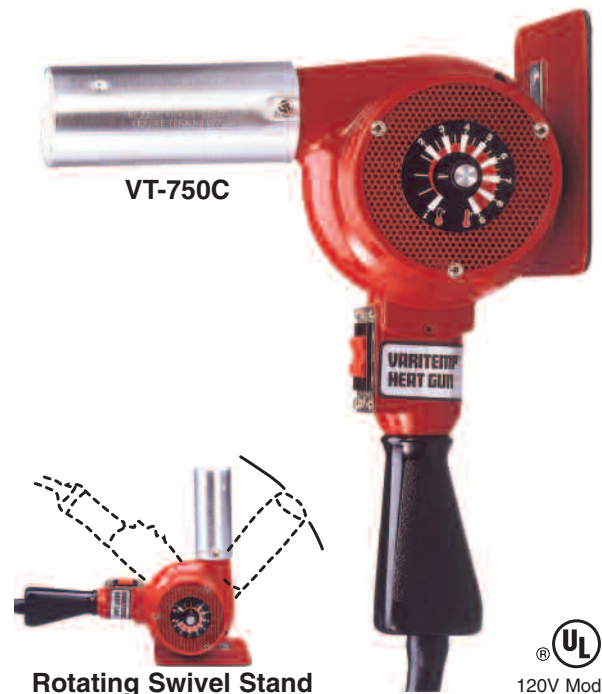


Rotating Swivel Stand

UL
120V Models

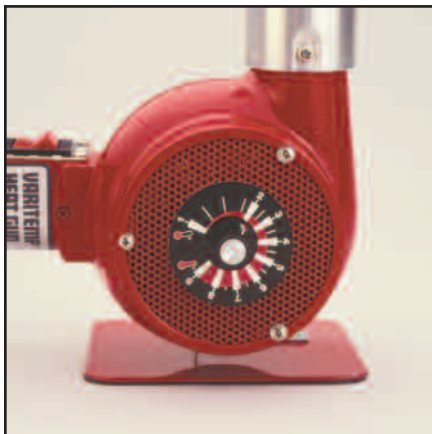

Variable temperature

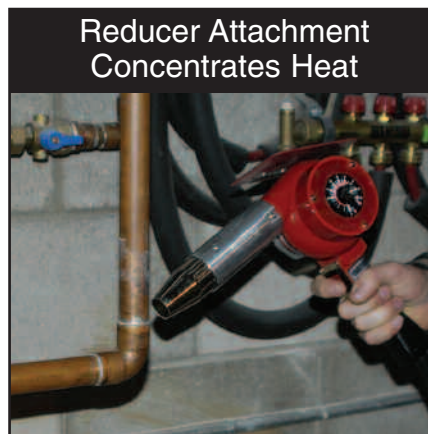

Solder/desolder



VT-750CK
Includes Heat Gun,
storage case
and three attachments

TECHNICAL SPECIFICATIONS

VTS-750, VT-750C, VT-750CK, VT-750-MC

Voltage:	120V, 60Hz, 14.5A
Output:	1740W maximum
Temperature (variable):	Ambient to 1000°F (ambient to 540°C)
Airflow:	Volume 23 CFM, velocity 3000 FPM
Agency Approvals:	UL Listed (120V models)

Nozzle opening:	1.2" I.D., 1.5" O.D.
Cordset:	6 ft, 3-wire grounded
Dimensions	
VTS Heat Gun:	9"L x 6"W x 12"H
VT Heat Gun:	9"L x 5.2"W x 10"H

VTS-752, VT-752C

Voltage:	220-240V, 50 Hz, 7A
Output:	1680W maximum
Temperature (variable):	Ambient to 750°F (ambient to 400°C)
Airflow:	Volume 21 CFM, velocity 2800 FPM

Motor: Universal

Net Tool Weight

VTS Heat Gun:	5.0 lbs
VT Heat Gun:	3.7 lbs

www.masterappliance.com

Varitemp® Attachments and Accessories

Professional quality attachments and accessories add versatility to your Varitemp Heat Guns.

These stainless steel nozzle attachments direct, concentrate or reflect heat to allow more versatile and precise applications for your heat tool. Expand your capabilities, improve job quality and save time using Master Attachments and Accessories.



A-160-HG
Shrink attachment for tubing up to 3/4"



51543
2-1/4" Spreader attachment



51544
7/8" Reducer attachment



A-170-HG
Shrink attachment for tubing 3/4" to 2" O.D.



30202
Solder preform attachment



51309
1/4" Pinpoint attachment



51542
Glass protector attachment



35245
Three of our most popular attachments




51013
Molded storage and carrying case for VT Heat Guns only

Professional Quality Varitemp Heat Guns. Perfect for many jobs.



Activate Adhesives



Solder Copper Pipe



Laboratory precise heat



Thaw Frozen Pipes



Bend Plastics and PVC



Remove Decals




Strip Paint



Loosen Bolts



Heat Shrink Tubing



Desolder



MASTER
APPLIANCE
Designers and Manufacturers of Heat Tools for Industry

FOR MASTER PRODUCTS CONTACT:

As with all electrical equipment and tools, for your safety, read the instruction manual before using.

All information including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of this product for their application. The only obligations of Master Appliance are those in the Standard Terms and Conditions of Sale for this product. In no case will Master Appliance be liable for any incidental indirect, or consequential damages arising from the sale, resale, use or misuse of this product.

Master Appliance Corp. • 2420 18th St. • Racine, WI 53403 USA • 800-558-9413 • 262-633-7791

Fax: 262-633-9745 • e-mail: sales@masterappliance.com • www.masterappliance.com

FORM# 58003 rev A