


| REVISIONS | | | DGC, ND, SPC-F004 * Effective: 7/B/02 * DCP No: 1398 | | | | | | |
|-----------|-----|-------------|--|----------|--------|----------|--------|----------|--|
| DCP # | REV | DESCRIPTION | DRAWN | DATE | CHECKD | DATE | APPRVD | DATE | |
| 1864 | | Released | NF | 03/27/08 | NL | 03/27/08 | JN | 03/27/08 | |
| | | | | | | | | | |



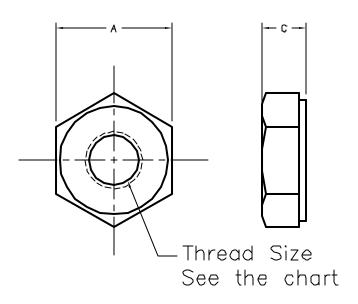

| SPC Type No. | Nut Type | Thread | А | В |
|-----------------|--------------|---------------|----------|--------------|
| SPC13378 | | 2-56 | .180±.01 | .07±.01 |
| SPC13379 | Hex Nuts | 4-40 | .250±.01 | .100±.0 1 |
| SPC13380 | | 10-32 | .365±.01 | .135±.0 1 |
| SPC13410 | | 2-56 | .180±.01 | .140±.0 1 |
| SPC13411 | | 4-40 .250±.01 | | .180±.0 1 |
| SPC13412 | Lock Nuts | 6-32 | .305±.01 | .200±.0 1 |
| SPC13413 | | 8-32 | .335±.01 | .230±.0 1 |
| SPC13414 | | 10-32 | .365±.01 | .250±.0 |

SPC-F004.0WG

| TOLERANCES: | DRAWN BY: | DATE: | DRAW | ING TITLE: | | • | * | | | |
|------------------|-------------|----------|------------|------------|-----|---------------------|----------|------------|-------------|----------------|
| UNLESS OTHERWISE | Jason Nash | 03/27/08 | | | Hex | Nuts | and Lock | : Nut | S | |
| SPECIFIED, | CHECKED BY: | DATE: | SIZE | DWG, NO |), | | | ELEC: | TRONIC FILE | REV |
| DIMENSIONS ARE | Jason Nash | 03/27/08 | 3 A | | TA- | TA-855 | | TA-855.dwg | | Α |
| PURPOSES ONLY. | | | | | | | | | | |
| | Jason Nash | 03/27/08 | SCALE: NTS | | | U,O,M.; INCHES [mm] | | J | SHEET: 1 OF | ⁻ 1 |

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY, DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND
RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME
ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.