


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
370	B	Type Nos 3628 and 3627 added	JWM	12/11/97	J.C.	12/18/97		
1779	C	RoHS ADDED	DCM	1/24/06	JWM	1/24/06	JWM	1/24/06

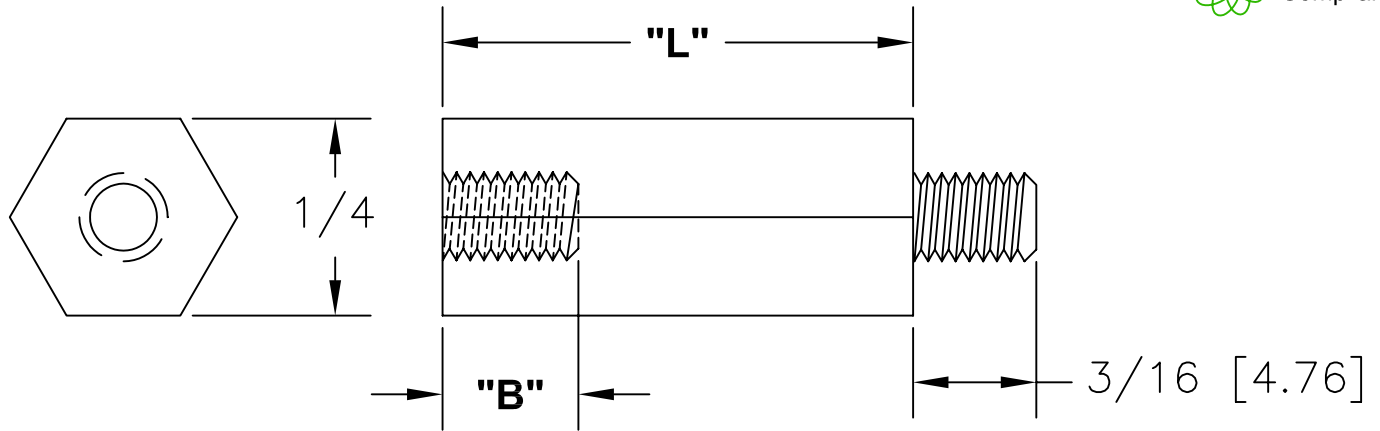

SPC Type No.	Thread Size	"L"	"B" Minimum
2436	4-40	1/4 [6.35]	3/16 [4.76]
2437	4-40	3/8 [9.53]	
2438	4-40	1/2 [12.70]	
2439	4-40	5/8 [15.88]	
2440	4-40	3/4 [19.05]	
2441	4-40	7/8 [22.22]	
2442	4-40	1 [25.40]	
3628	4-40	1 3/8 [34.93]	
3627	4-40	2 [50.80]	
2443	6/32	1/4 [6.35]	1/4 [6.35]
2444	6/32	3/8 [9.53]	
2445	6/32	1/2 [12.70]	
2446	6/32	5/8 [15.88]	
2447	6/32	3/4 [19.05]	
2448	6/32	7/8 [22.22]	
2449	6/32	1 [25.40]	
2450	8-32	1/4 [6.35]	3/8 [9.53]
2451	8-32	3/8 [9.53]	
2452	8-32	1/2 [12.70]	
2453	8-32	5/8 [15.88]	
2454	8-32	3/4 [19.05]	
2455	8-32	7/8 [22.22]	
2456	8-32	1 [25.40]	

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY: Jeff McVicker	DATE: 9/24/97	DRAWING TITLE: Male/Female Nylon Threaded Standoffs			
	CHECKED BY: JOHN COLE	DATE: 10/10/97	SIZE A	DWG. NO. TA-126	ELECTRONIC FILE ta-126.dwg	REV C
	APPROVED BY: BRETT BRAATZ	DATE: 10/14/97	SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1
	ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.					