


**Part Number:** AT-1620-TWT-12V-R



**Features**

Mounting: Thru Hole  
Tone: Continuous  
Frequency: 2048 +/- 500 Hz  
Lead Free Component


**Electrical Specifications**

Operating Voltage	9 +/- 15 Vp-p
Rated Current (Max.)	40 mA
Rated Voltage	12 Vp-p
Resonant Frequency	2048 +/- 500 Hz
Sound Pressure Level @ 10 cm (Min.)	85 dBA

Case: Noryl  
Weight: 5 g  
Pin Material: SnBi plated copper  
Environmentally friendly, lead free


**Mechanical**

*Dimensions are in millimeters, tolerance is ± 0.5 unless otherwise specified.*

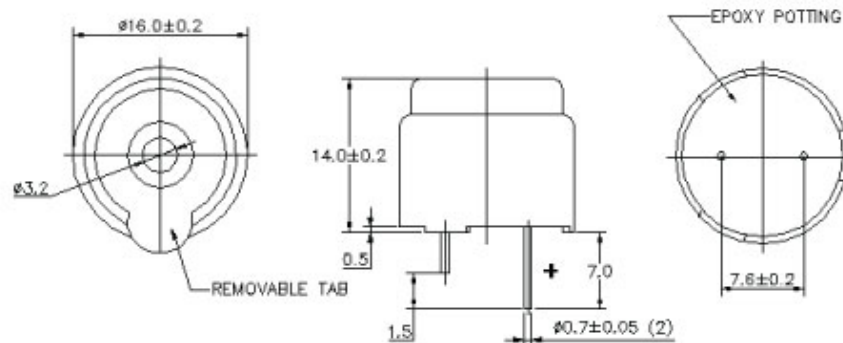

**Performance**

*Typical SPL vs. Frequency*

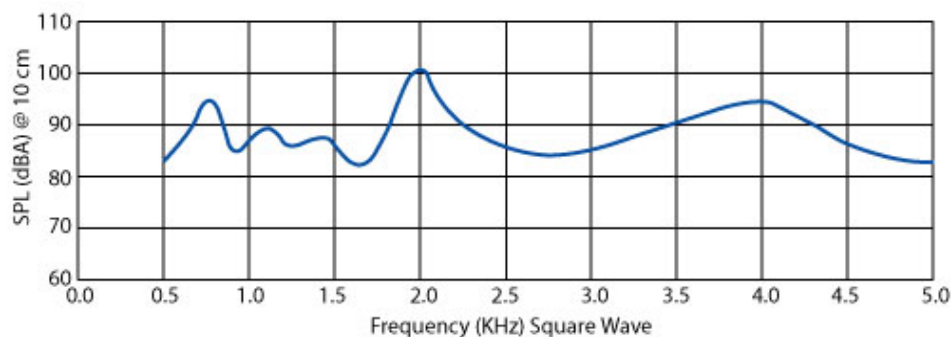

**For application notes and detail drawing specifications, please consult [www.projectsunlimited.com](http://www.projectsunlimited.com).**

Specifications subject to change without notice.

© 2005, Projects Unlimited Inc., All Rights Reserved.