


MAB-03A-T-D1


- Digital Output Microphone
- Surface Mount Electret Design
- Omni-directional
- Very Small Size

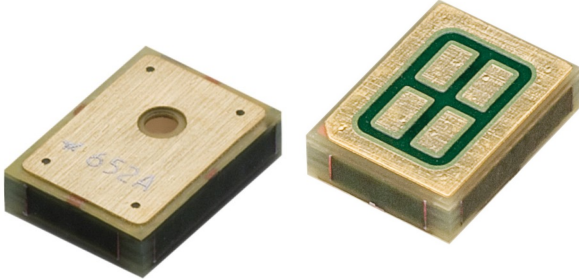

Specifications:

| | |
|---------------------|----------------|
| Sensitivity | -28 ± 3 dB |
| Max. Input SPL | 120 dB |
| Operating Voltage | 1.64-2.86 V |
| Current Consumption | 500 μA (max) |
| S/N Ratio | 55 dB (min) |
| Directivity | Omni |
| Operation Temp. | -30°C to +70°C |
| External Size | 3 x 4 x 1mm |
| Mass | <0.5 g |

Frequency Response

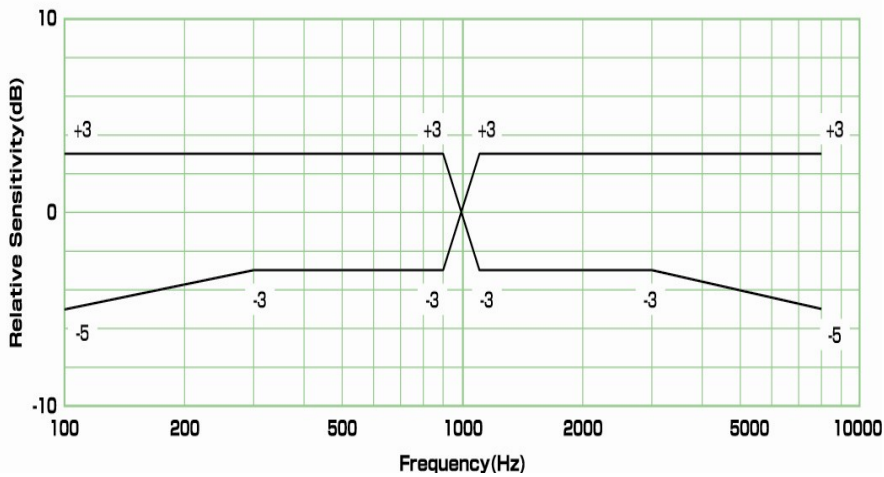

Sound hole

