


EK-23132-000



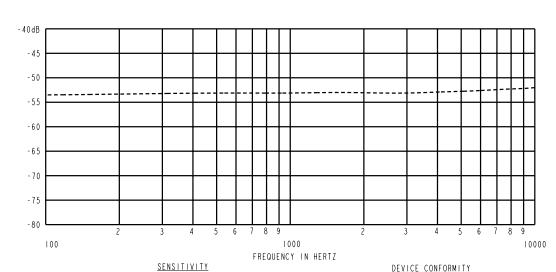

FREQUENCY	MIN.	NOM.	MAX.
100		-53.5	
1000	- 55.0	-53.0	-51.0
10000		-52.0	

NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREO. OF 1000 Hz.
- 4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.
- 5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

	PORT DC AMPLIFIER CURRENT DRAI	DC	AMPLIFIER	SENSITIVITY CHANGE ON REDUCING SUPPLY	"A" WEIGHTED NOISE			CAPACITANCE ±50%			
		CURRENT DRAIN	TO 0.9VDC	(I kHz EQUIV. SPL)	MIN.	NOM.	MAX.	OUTPUT TO NEGATIVE	POSITIVE	POS. TO NEGATIVE	
r	KA	1.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800	N/A	N/A	N/A

	Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Released			Δ
	A	M10101029	2-28-06			
	WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF FOULPHENT AND TEST METHOD VARIATION				DR. BY	DATE
					ммм	2-28-06
					CK. BY	DATE

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.