

XM1800S

DYNAMIC MICROPHONE



Technical Specifications

Version 1.2 June 2003

ENGLISH


- ▲ Dedicated vocal and instrument mic brings unbelievable quality to your studio and live performance
- ▲ With On/Off switch
- ▲ Extremely high signal output makes your voice cut through
- ▲ Ultra-low distortion for super clean sound
- ▲ Presence lift in critical mid-range gives you maximum voice projection
- ▲ Exceptional off-axis rejection eliminates feedback problems
- ▲ Super rugged construction copes with your toughest live assignments
- ▲ Foam-lined impact-resistant carrying case included
- ▲ Microphone stand adapter included
- ▲ Designed in Germany. Manufactured under ISO9000 certified management system

www.behringer.com




DYNAMIC MICROPHONE XM1800S

POLAR PATTERN

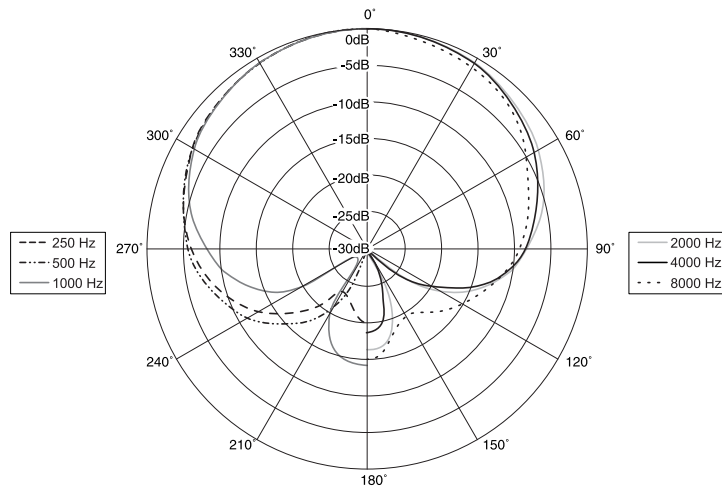

FREQUENCY RESPONSE CHART

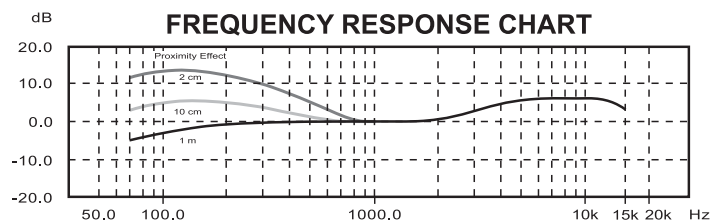

SPECIFICATIONS

Type:	Dynamic
Frequency response:	80 Hz - 15 kHz
Polar pattern:	Super cardioid
Impedance:	600 Ω
Sensitivity:	-52 dBV (0 dBV = 1 V/Pa), 2.5 mV/Pa
Connector:	3-pin balanced XLR (male)
Dimensions:	
Head length	57.5 mm
Main unit length	117.5 mm
Total length	175 mm
Weight:	230 g

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.
BEHRINGER is a registered trademark. ALL RIGHTS RESERVED. © 2003 BEHRINGER Spezielle Studiotechnik GmbH.
BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903