

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JWM	1/15/02	HO	1/29/02	DJC	1/30/02

SPECIFICATIONS

Display: 3 1/2 digit liquid crystal display (LCD) with a maximum reading of 1999

Polarity: Automatic, positive implied, negative polarity indication

Overrange: (OL) or (-OL) is displayed

Zero: Automatic

Low Battery Indication: The battery light is displayed when the battery voltage drops below the operating level

Measurement Rate: 2.5 times per second, nominal

Operating Environment: 0°C~50°C at <70% relative humidity

Storage Temperature: -20°C~60°C, 0~80% RH with battery removed from meter

Accuracy: Stated accuracy at 23°C ± 5°C, <75% relative humidity

Power: Single standard 9V battery, NEDA 1604, JIS 006P, IEC 6F22

Battery Life: 200 hours typical with carbon-zinc

Accessories: One set test leads, 9V battery (installed), one thermocouple probe and operating instructions

DC Voltage

Range: 2V, 20V, 200V, 600V

Resolution: 1mV

Accuracy: ±(1.2% rdg + 1 digit)

Input Impedance: 10Mohm

Overload Protection: 600VDC or AC RMS

AC Voltage (50Hz - 500Hz):


Range: 200V, 600V

Resolution: 100mV

Accuracy: ±(2.0% rdg + 4 digits)

Input Impedance: 4.5Mohm

Overload Protection: 600VDC or AC RMS

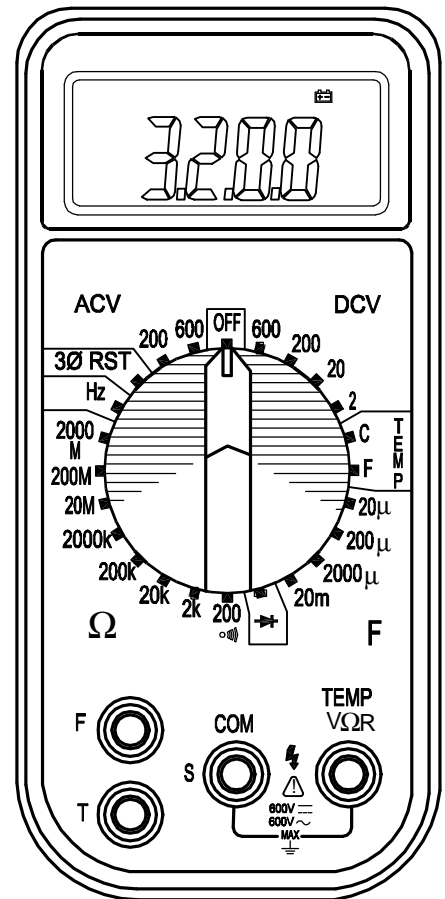

NOTES:

- Dimensions: 5²⁵/₃₂ [147] (H) x 2³/₄ [70] (W) x 1¹⁷/₃₂ [39] (D)
- Weight: 12oz.[340g]

SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TENMA[®]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	1/15/02	Digital Multimeter			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Hishamn Odish	1/29/02	A	72-4030	92F6213.dwg	A
APPROVED BY:	DATE:	SCALE:	U.O.M.:	SHEET:		
Daniel Carey	1/30/02	NTS	INCHES [mm]	1 OF 2		

Resistance

Range: 200ohm, 2Kohm, 20Kohm, 200Kohm, 2000Kohm, 20Mohm, 200Mohm, 2000Mohm
Accuracy: \pm (1.0% rdg + 4 digits) on 200ohm~2000Kohm ranges,
 \pm (2.0% rdg + 4 digits) on 20Mohm range,
 \pm [(5.0% rdg -10 digits) + 10 digits] on 200Mohm and 2000Mohm ranges
Open Circuit Volts: 0.3VDC (3.0VDC on 200ohm, 200Mohm, 2000Mohrn ranges)
Overload Protection: 500VDC or AC RMS

Continuity

Audible Indication: Less than 100ohm
Overload Protection: 500VDC or AC RMS

Diode Test

Test Current: 1.0mA \pm 0.6mA
Accuracy: \pm (3.0% rdg + 1 digit)
Open Circuit Volts: 3.0VDC typical
Overload Protection: 500VDC or AC RMS

Capacitance

Range: 20 μ F, 200 μ F, 2000 μ F, 20mF
Accuracy: \pm (4.0% rdg + 10 digits) on all ranges
Test Frequency: 21Hz
Test Voltage: <3.5V
Input Protection: 0.1A/250V fast acting fuse

Frequency (Autoranging)

Range: 10Hz~100KHz
Accuracy: \pm (0.5% rdg + 2 digits) on all ranges
Sensitivity: 2V RMS min.
Overload Protection: 500VDC or AC RMS

Temperature

Range: -20°C~400°C (-4°F~752°F)
Accuracy: \pm (2.0% rdg + 2°C), \pm (2.0% rdg + 4°F)
Sensor Type: K type thermocouple
Overload Protection: 500VDC or AC RMS

Phase Indicator

Frequency Range: 45Hz~450Hz
Voltage Range: 80V~480V

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	72-4030	92F6213.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 2 OF 2