


REVISIONS			DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
1740	Α	Released	JWM	9/14/04	SF	9/16/04	JC	9/16/04	

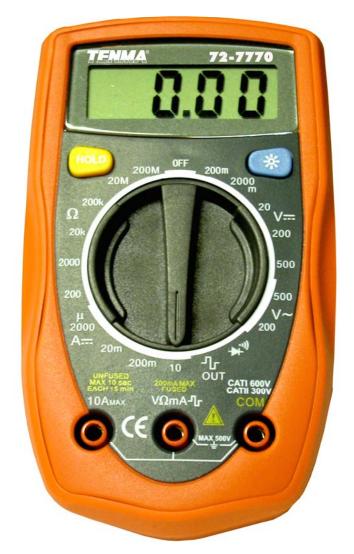

FEATURES:

- 3 ¾ Digit LCD
- 1999 Count
- Diode and Continuity Tester
- Square Wave Output
- Data Hold
- 1-Year Warranty
- Meets IEC 1010, 600V CAT I, 300V CAT II
- CE Compliant
- · Power: 9V Battery (6F22) Included
- LCD Size: 48mm x 16mm
- Weight: Approx. 156g
- · Includes Test Leads, Manual, and Holster
- Low Battery Indicator
- Display Backlight
- Input Impedance for DCV: Approx. 10MΩ
- Size: 130mm x 73.5mm x 35mm

Function	Range	Accuracy
DC Voltage	200mV, 2000mV, 20V, 200V, 500V	±(0.5%+2)
AC Voltage	200V, 500V	±(1.2%+10)
DC Current	2000μA, 20mA, 200mA, 10A	±(1%+2)
Resistance	200Ω , 2000Ω , 20 k Ω , 20 0k Ω , 20 Μ Ω , 20 0Μ Ω	±(0.8%+2)

SPC-F004.DWG

TOLERANCES:	DRAWN BY:	DATE:	DRAW	ING TITLE:					
UNLESS OTHERWISE	Jeff McVicker	9/14/04			Palm	Size Digital Mu	ultime	eter	
SPECIFIED,	CHECKED BY:	DATE:	SIZE	DWG. NO.			ELEC	TRONIC FILE	REV
DIMENSIONS ARE FOR REFERENCE	Steve Feiwell	9/16/04	A		72-7770		02J5547.dwg		Α
PURPOSES ONLY.	APPROVED BY:	DATE:							
	John Cole	9/16/04	SCALI	E: NTS		U.O.M.: INCHES [mm]		SHEET: 1 OF	- 1

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.