


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO. SPC-F005	* Effective: 12/21/98		* DCP No: 880	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE
615	A	RELEASED	JMM	5/9/01	JC	9/4/01
					DJC	9/21/01



- NOTES:
1. Jacket Mat'l: Red Extra Flexible Silicone
 2. Conductor Size: 0.75mm²
 3. Max Current: 12 Amps
 4. Internal Resistance: 20 milliohms
 5. Body Mat'l: Polyamide (Nylon)
 6. Plug Mat'l: Bronze and Brass Nickel Plated
 7. Operating Temp.: -20°C ~ 80°C
 8. IEC61010 Ratings: 1000 V CAT III
- Reinforced or Double Insulation

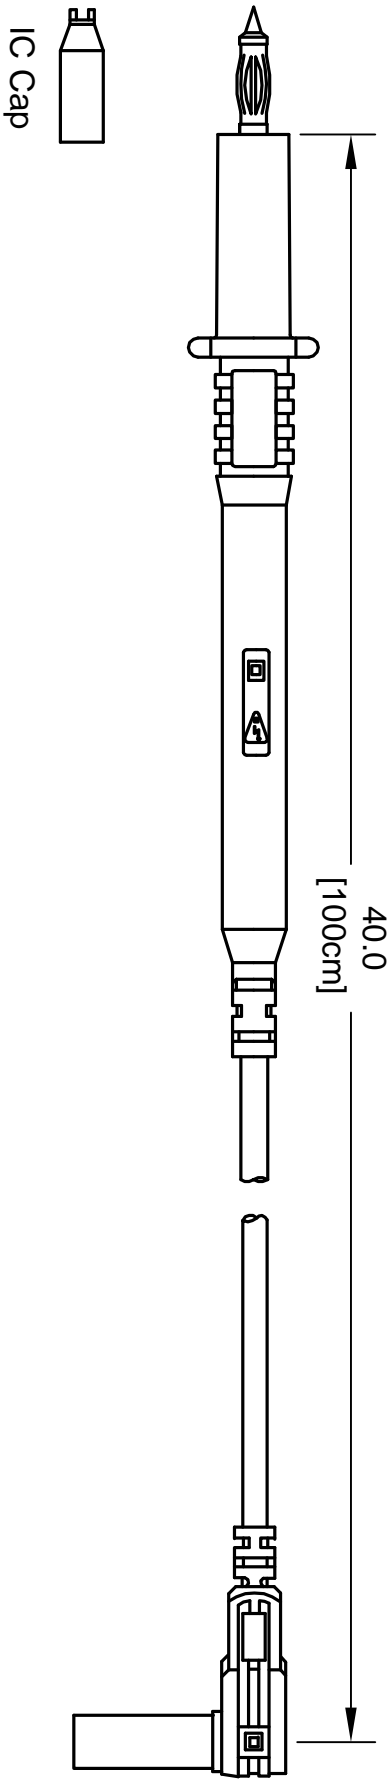

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWING TITLE: 4mm Contact Tip Probe to Right-Angle Plug	
DRAWN BY:	DATE:	SIZE	DWG. NO.
Jeff McVicker	5/9/01	A	76-046
CHECKED BY:	DATE:	ELECTRONIC FILE	REV
JOHN COLE	9/4/01	16F7715.dwg	A
APPROVED BY:	DATE:	SCALE:	SHEET:
Daniel Carey	9/21/01	NTS	1 OF 1