




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F008.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1355	A	RELEASED	JWM	1/2/04	JN	03/04/08	JN	03/04/08

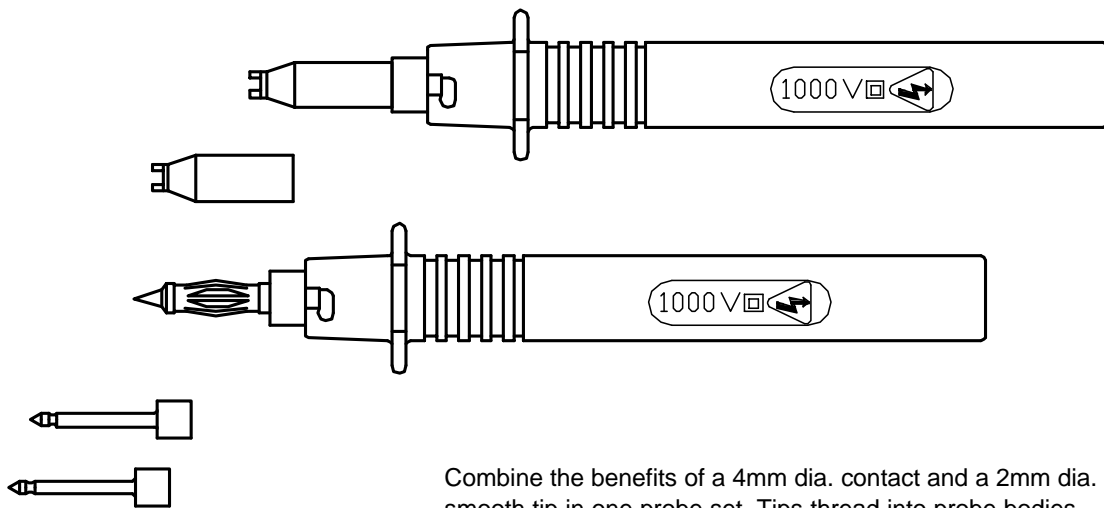

Combine the benefits of a 4mm dia. contact and a 2mm dia. smooth tip in one probe set. Tips thread into probe bodies.

IEC61010 Ratings: 1000V CAT III

36 Amps



Reinforced or Double Insulation

Materials: Body: Polymide (Nylon)

Tip: Brass, Nickel Plated

Jack: Brass

Internal Resistance: <5 milliohms

Temperature: -20°C to 80°C

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	1/2/04
CHECKED BY:	DATE:
Jason Nash	03/04/08
APPROVED BY:	DATE:
Jason Nash	03/04/08

DRAWING TITLE:

Replaceable Tip Probe w/4mm Safety Jack

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	76-080	16F7739.dwg	A
SCALE: NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1	