


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/98	DCP No:	880	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
615	A	Released	JMM	4/24/02	HO	4/29/02	DJC	4/29/02

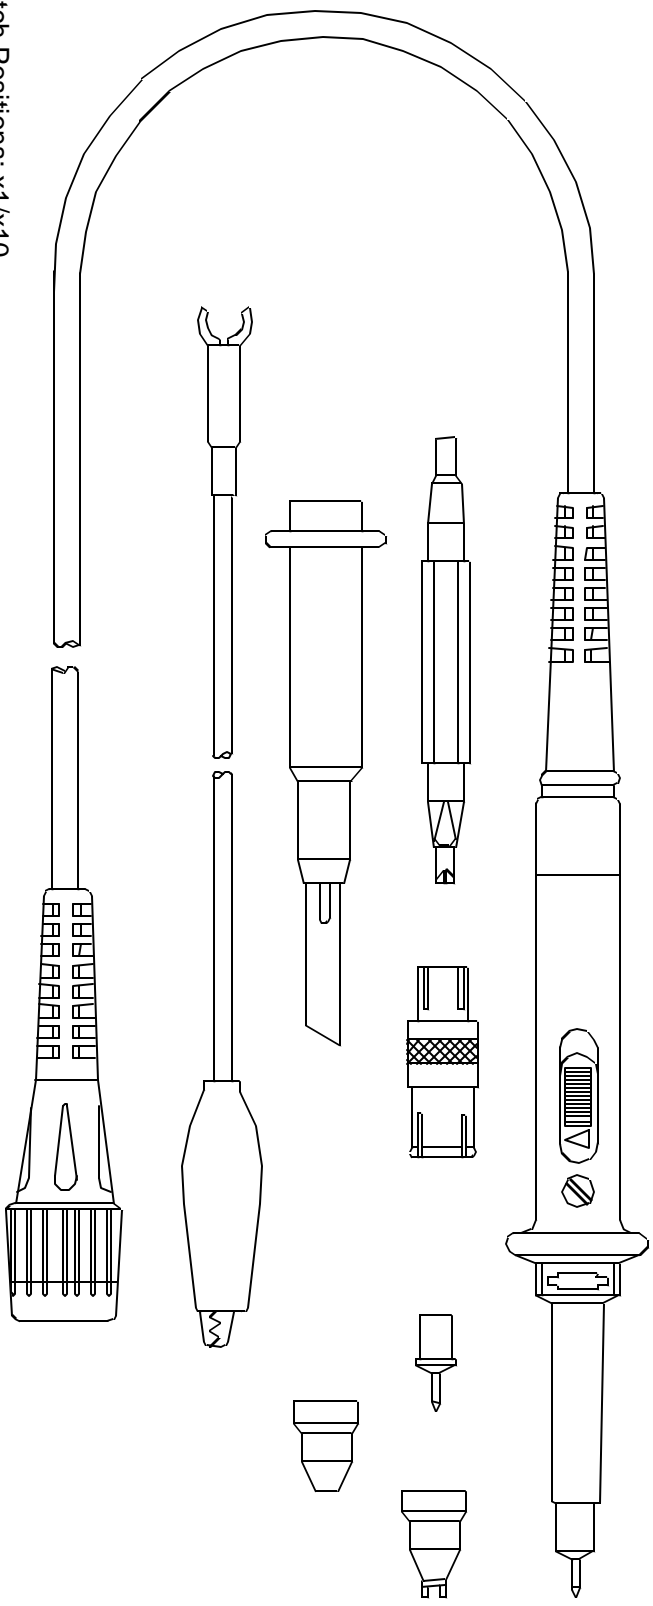

- Notes:
1. 2 Switch Positions: x1/x10
 2. Attenuation: x1/x10
 3. Input Resistance: 1Megohm (x1); 10Megohm (x10)
 4. Input Capacitance: 46pF (x1); 16pF (x10)
 5. Bandwidth (MHz): 15 (x1); 100 (x10)
 6. Risettime (ns): 27 (x1); 3.5 (x10)
 7. Max. Input (VDC + AC Max): 600
 8. Compensation: (pF) 10..35
 9. Length: 1.2 meters
 10. Meets IEC61010-2-031 CAT I 600V

Insulated BNC

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



DRAWING TITLE: Insulated BNC, 2-Position, Oscilloscope Probe Kit

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY: Jeff McVicker	DATE: 4/24/02
	CHECKED BY: Higham Odiah	DATE: 4/29/02
	APPROVED BY: Daniel Carey	DATE: 4/29/02

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	76-123	18C2263.dwg	A
SCALE:	NTS	U.O.M.: Millimeters	SHEET: 1 OF 1