


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	* Effective:	12/21/98	* DCP No:	680	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JMM	11/13/00	JC	11/27/00	DJC	11/27/00

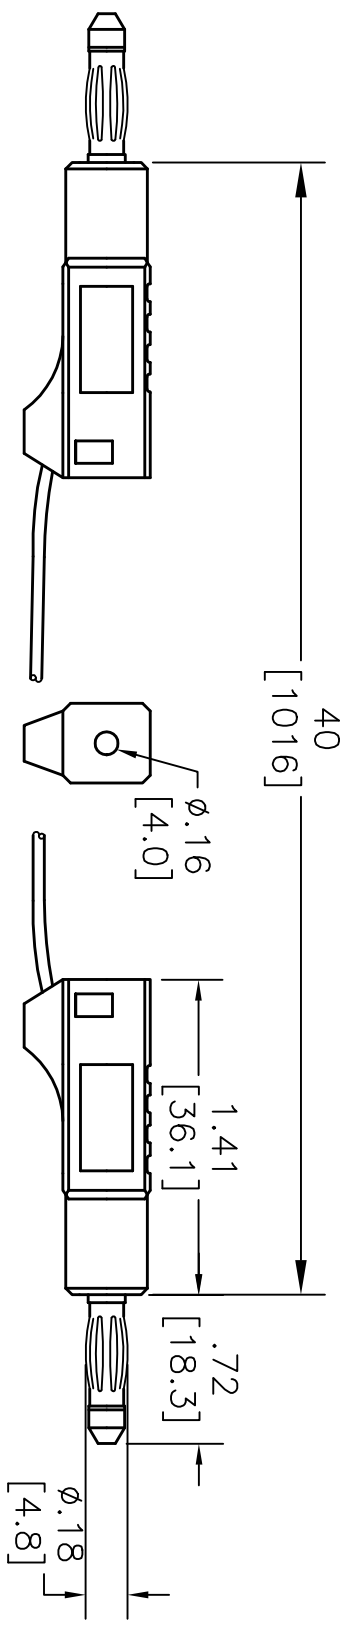

**SPECIFICATIONS**

Wire: Reinforced insulation silicone (-60°C ~ 180°C)  
 196X0.07mm Stranded Bare Copper, (0.75mm<sup>2</sup>) Cross Section,  
 0.142±.008 [3.6±0.2mm] O.D.  
 Insulated Housing: PA6 (Nylon) Thermoplastic, UL94V-0  
 Contact: 4mm, 9 Leaf-BeCu, Nickel Plated,  
 Plug Body and Jack: Brass, Nickel Plated

**Rating:**  
 Voltage: 1200V AC/DC  
 Current: 12A Max.  
 Resistance: 20 milliohms Max., 100cm Length  
 Temperature: -20°C ~ 80°C



DISCLAIMER:  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



DRAWN BY:		DATE:	DRAWING TITLE:	
Jeff McVicker		11/12/00	Lead w/4mm Stacking Plug to Plug - Red	
CHECKED BY:		DATE:	SIZE	DWG. NO.
JOHN COLE		11/27/00	A	76-008
APPROVED BY:		DATE:	SCALE:	NTS
Daniel Carey		11/27/00	U.O.M.: INCHES [mm]	
			ELECTRONIC FILE	REV
			16F7680.dwg	A
			SHEET: 1	OF 1