


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SFC-F005	* Effective: 12/21/98	* DCP No: 680			
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JMM	11/13/00	JC	11/27/00	DJC	11/27/00

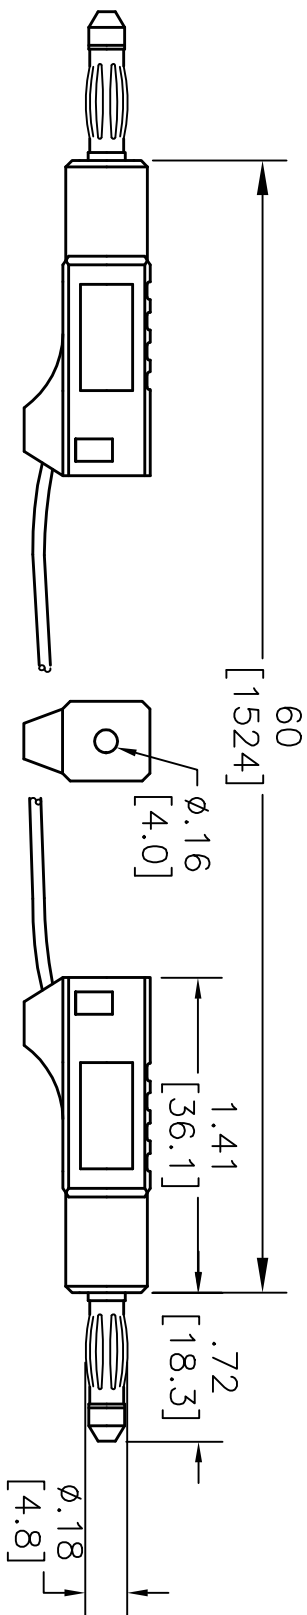

SPECIFICATIONS

Wire: Reinforced insulation silicone (-60°C ~ 180°C)
 196X0.07mm Stranded Bare Copper, (0.75mm²) Cross Section,
 0.142±.008 [3.6±0.2mm] O.D.

Insulated Housing: PA6 (Nylon) Thermoplastic, UL94V-0
 Contact: 4mm, 9 Leaf-BeCu, Nickel Plated,
 Plug Body and Jack: Brass, Nickel Plated

Rating:

Voltage: 1200V AC/DC
 Current: 12A Max.
 Resistance: 20 milliohms Max., 100cm Length
 Temperature: -20°C ~ 80°C



DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	Jeff McVicker	DATE:	11/12/00
CHECKED BY:	JOHN COLE	DATE:	11/27/00
APPROVED BY:	Daniel Carey	DATE:	11/27/00

DRAWING TITLE:			
Lead w/4mm Stacking Plug to Plug – Red			
SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	76-010	16F7682.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1