


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISONS		DOC. NO.	SPC-F005	Effective:	12/21/98	DCP No:	680	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
615	A	RELEASED	JMM	6/7/01	JC	8/13/01	DJC	8/20/01

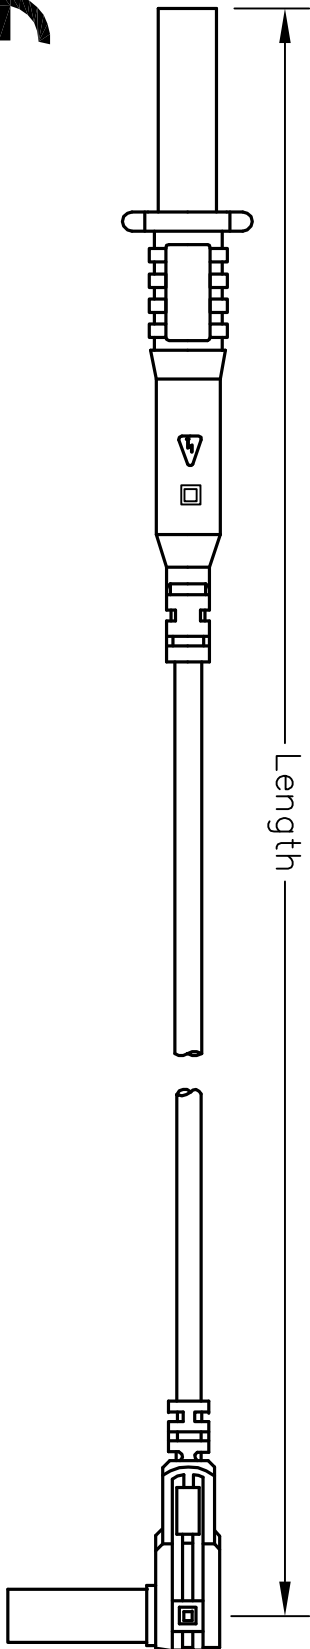


**NOTES:**

1. Jacket Mat'l: Extra Flexible Silicone
2. Conductor Size: 0.75mm<sup>2</sup>
3. Body Mat'l: Polyamide (Nylon)
4. Plug Mat'l: Bronze and Brass Nickel Plated
5. Operating Temp.: -20°C ~ 80°C
6. IEC61010 Ratings: 1000 V CAT III  
Reinforced or Double Insulation
7. Max. Current: 12 Amps

TENMA Part No.	Color	Length Inches [cm]	Internal Resistance (mW)
76-018	Red	40 [100]	20
76-019	Black		
76-020	Red	60 [150]	25
76-021	Black		

DISCLAIMER  
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL. THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.		DRAWING TITLE: <b>4mm Sheathed Straight Plug to Right Angle Plug</b>	
DRAWN BY:	DATE:	SIZE	DWG. NO.
Jeff McVicker	6/8/01	A	TA-361
CHECKED BY:	DATE:	SCALE:	NTS
JOHN COLE	8/13/01		
APPROVED BY:	DATE:	U.O.M.:	INCHES [cm]
Daniel Carey	8/20/01		
		ELECTRONIC FILE	TA-361.dwg
		REV	A
		SHEET:	1 OF 1