

**Extremely small dimensions**  
**Versions with special dimensions**  
**can be supplied at short notice**

### Construction

- Dielectric: polyethylene terephthalate (polyester)
- Stacked-film technology
- Uncoated

### Features

- Special dimensions available upon request
- High pulse strength
- Minimum tensile strength of leads >10 N

### Typical applications

- Standard applications
- Electronic lamp ballast circuits
- Energy-saving lamps
- Substitute for electrolytics in electronic lamp ballasts (420 Vdc)

### Terminals

- Parallel wire leads, tinned
- Also available with  $(3,2 \pm 0,3)$  mm lead length upon request
- Taped version of B32560 are also available with lead spacing 5 mm (leads bent from 7,5 spacing to 5 mm)

### Marking

Rated capacitance (coded),  
 rated dc voltage

### Delivery mode

Bulk (untaped)


Taped (AMMO pack or reel) for  
 lead spacing  $\leq 15,0$  mm.

For notes on taping, refer to chapter "Taping and packing", page 274.

### Notes on mounting

When mounting these capacitors, take into account creepage distances and clearances to adjacent live parts. The insulating strength of the cut surfaces to other live parts of the circuit is 1,5 times the capacitors rated dc voltage, but is always at least 300 Vdc.

Capacitors with 7,5 mm lead spacing are only suitable for use with single-clad printed circuit boards.



Dimensions in mm

Lead spacing	Diameter $d_1$	Type
$e \pm 0,4$		
7,5	0,5	B 32 560
10,0	0,5	B 32 561
15,0	0,6	B 32 562
22,5	0,8	B 32 563
27,5	0,8	B 32 564

### Overview of available types

Lead spacing	7,5 mm	10 mm	15 mm	22,5 mm	27,5 mm
Type	B 32 560	B 32 561	B 32 562	B 32 563	B 32 564
Page	43	45	46	47	48
1,0 nF					
1,5 nF					
2,2 nF					
3,3 nF					
4,7 nF					
6,8 nF					
10 nF					
15 nF					
22 nF					
33 nF					
47 nF					
68 nF					
0,10 µF					
0,15 µF					
0,22 µF					
0,33 µF					
0,47 µF					
0,68 µF					
1,0 µF					
1,5 µF					
2,2 µF					
3,3 µF					
4,7 µF					
5,6 µF <sup>1)</sup>					
6,8 µF					
10 µF					
15 µF					
22 µF					
33 µF					

1) For B 32 564, 420 Vdc only

**Ordering codes and packing units, lead spacing 7,5 mm**

$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs)		
				Ammo pack	Reel	Untaped
63 Vdc (40 Vac)	0,22 $\mu$ F	2,5 × 5,2 × 9,0	B32560-J224-+	2)	2)	2500
	0,33 $\mu$ F	2,5 × 5,6 × 9,0	B32560-J334-+	2)	2)	2500
	0,47 $\mu$ F	2,6 × 5,8 × 9,0	B32560-J474-+****	3250	2600	2000
	0,68 $\mu$ F	3,2 × 6,2 × 9,0	B32560-J684-+****	2850	2300	1500
	1,0 $\mu$ F	4,0 × 6,8 × 9,0	B32560-J105-+****	2200	1800	1000
	1,5 $\mu$ F	5,1 × 7,6 × 9,0	B32560-J155-+****	1700	1400	500
	2,2 $\mu$ F	6,5 × 8,2 × 9,0	B32560-J225-+****	1300	1100	500
	3,3 $\mu$ F	8,5 × 9,1 × 9,0	B32560-J335-+	–	–	350
	4,7 $\mu$ F	9,8 × 11,0 × 9,0	B32560-J475-+	–	–	250
6,8 $\mu$ F	11,5 × 13,3 × 9,0	B32560-J685-+	–	–	150	
100 Vdc (63 Vac)	0,10 $\mu$ F	2,5 × 4,7 × 9,0	B32560-J1104-+	2)	2)	3000
	0,15 $\mu$ F	2,5 × 4,7 × 9,0	B32560-J1154-+	2)	2)	3000
	0,22 $\mu$ F	2,5 × 5,1 × 9,0	B32560-J1224-+****	3400	2700	2000
	0,33 $\mu$ F	2,7 × 5,7 × 9,0	B32560-J1334-+****	3100	2500	1500
	0,47 $\mu$ F	3,4 × 6,1 × 9,0	B32560-J1474-+****	2500	2000	1200
	0,68 $\mu$ F	4,2 × 6,5 × 9,0	B32560-J1684-+****	2000	1600	1000
	1,0 $\mu$ F	5,5 × 7,0 × 9,0	B32560-J1105-+****	1600	1300	500
	1,5 $\mu$ F	6,7 × 8,2 × 9,0	B32560-J1155-+	–	–	400
	2,2 $\mu$ F	8,5 × 9,2 × 9,0	B32560-J1225-+	–	–	300
250 Vdc (160 Vac)	33 nF	2,5 × 4,8 × 9,0	B32560-J3333-+	2)	2)	3000
	47 nF	2,5 × 5,2 × 9,0	B32560-J3473-+****	3500	2800	2300
	68 nF	2,6 × 5,7 × 9,0	B32560-J3683-+****	3400	2700	1700
	0,10 $\mu$ F	3,2 × 6,1 × 9,0	B32560-J3104-+****	2650	2200	1200
	0,15 $\mu$ F	3,9 × 7,0 × 9,0	B32560-J3154-+****	2150	1800	1000
	0,22 $\mu$ F	4,9 × 7,5 × 9,0	B32560-J3224-+****	1750	1400	650
	0,33 $\mu$ F	6,4 × 8,2 × 9,0	B32560-J3334-+	–	–	500

Capacitance tolerance:  $\pm 20\% \hat{=} M, \pm 10\% \hat{=} K, \pm 5\% \hat{=} J$

Special dimensions available upon request.

For corresponding design rules, refer to chapter "General technical information", page 290.


1) + Code letter for capacitance tolerance

\*\*\* Code number for packing: Ammo pack = 289, reel = 189

Lead spacing changed from 7,5 to 5 mm by bending leads: Ammo pack = 259, reel = 159

The ordering code for untaped components ends after the tolerance code letter.

2) Taping upon request



B 32 560

**Ordering codes and packing units, lead spacing 7,5 mm**

$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs)		
				Ammo pack	Reel	Untaped
400 Vdc (200 Vac)	1,0 nF	2,5 × 5,5 × 9,0	B32560-J6102-+	2)		2300
	1,5 nF	2,5 × 5,5 × 9,0	B32560-J6152-+***	3500	2900	2000
	2,2 nF	2,5 × 5,5 × 9,0	B32560-J6222-+***	3700	3000	2100
	3,3 nF	2,5 × 5,5 × 9,0	B32560-J6332-+***	3400	2800	2000
	4,7 nF	2,5 × 5,5 × 9,0	B32560-J6472-+***	3700	3000	2000
	6,8 nF	2,5 × 5,5 × 9,0	B32560-J6682-+***	3700	3000	2000
	10 nF	2,5 × 5,5 × 9,0	B32560-J6103-+***	3500	2800	2200
	15 nF	2,5 × 5,5 × 9,0	B32560-J6153-+***	3500	2800	2500
	22 nF	2,5 × 5,5 × 9,0	B32560-J6223-+***	3400	2700	2300
	33 nF	2,6 × 6,0 × 9,0	B32560-J6333-+***	3400	2700	1600
	47 nF	3,2 × 6,5 × 9,0	B32560-J6473-+***	2650	2200	1200
	68 nF	3,8 × 7,3 × 9,0	B32560-J6683-+***	2250	1900	1000
	0,10 µF	4,9 × 7,7 × 9,0	B32560-J6104-+***	1750	1400	500
	0,15 µF	6,5 × 8,2 × 9,0	B32560-J6154-+	–	–	500
630 Vdc (400 Vac)	1,0 nF	2,5 × 5,5 × 9,0	B32560-J8102-+	2)	2)	2300
	1,5 nF	2,5 × 5,5 × 9,0	B32560-J8152-+***	3500	2900	2000
	2,2 nF	2,5 × 5,5 × 9,0	B32560-J8222-+***	3700	3000	2100
	3,3 nF	2,5 × 5,5 × 9,0	B32560-J8332-+***	3400	2800	2000
	4,7 nF	2,5 × 5,5 × 9,0	B32560-J8472-+***	3400	2700	1800
	6,8 nF	3,2 × 6,5 × 9,0	B32560-J8682-+***	2900	2400	1300
	10 nF	3,8 × 7,5 × 9,0	B32560-J8103-+***	2400	2000	1000

Capacitance tolerance: ±20 %  $\hat{=}$  M, ±10 %  $\hat{=}$  K, ±5 %  $\hat{=}$  J

Special dimensions available upon request.

For corresponding design rules, refer to chapter "General technical information", page 290.

1) + Code letter for capacitance tolerance

\*\*\* Code number for packing: Ammo pack = 289, reel = 189

Lead spacing changed from 7,5 to 5 mm by bending leads: Ammo pack = 259, reel = 159

The ordering code for untaped components ends after the tolerance code letter.

2) Taping upon request

**Ordering codes and packing units, lead spacing 10 mm**

$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs)		
				Ammo pack	Reel	Untaped
100 Vdc (63 Vac)	0,33 $\mu$ F	2,5 × 5,2 × 11,5	B32561-J1334-+***	1750	2400	1600
	0,47 $\mu$ F	2,9 × 5,8 × 11,5	B32561-J1474-+***	1560	2300	1200
	0,68 $\mu$ F	3,6 × 6,3 × 11,5	B32561-J1684-+***	1260	2000	1000
	1,0 $\mu$ F	4,5 × 6,9 × 11,5	B32561-J1105-+***	1050	1500	500
	1,5 $\mu$ F	5,6 × 7,8 × 11,5	B32561-J1155-+***	810	1200	500
	2,2 $\mu$ F	6,9 × 9,0 × 11,5	B32561-J1225-+	–	–	400
250 Vdc (160 Vac)	47 nF	2,5 × 4,4 × 11,5	B32561-J3473-+	2)	2)	2300
	68 nF	2,5 × 4,8 × 11,5	B32561-J3683-+***	1760	2400	1800
	0,10 $\mu$ F	2,8 × 5,3 × 11,5	B32561-J3104-+***	1600	2300	1300
	0,15 $\mu$ F	3,3 × 6,0 × 11,5	B32561-J3154-+***	1300	2000	1000
	0,22 $\mu$ F	4,2 × 6,6 × 11,5	B32561-J3224-+***	1040	1600	700
	0,33 $\mu$ F	5,2 × 7,5 × 11,5	B32561-J3334-+***	850	1300	500
	0,47 $\mu$ F	6,3 × 8,5 × 11,5	B32561-J3474-+***	700	1000	400
400 Vdc (200 Vac)	10 nF	2,5 × 5,1 × 11,5	B32561-J6103-+***	1760	2400	1700
	15 nF	2,5 × 5,1 × 11,5	B32561-J6153-+***	1830	2500	2000
	22 nF	2,5 × 5,1 × 11,5	B32561-J6223-+***	1830	2500	2000
	33 nF	2,5 × 5,1 × 11,5	B32561-J6333-+***	1760	2400	1700
	47 nF	2,6 × 6,0 × 11,5	B32561-J6473-+***	1760	2400	1300
	68 nF	3,2 × 6,6 × 11,5	B32561-J6683-+***	1390	2100	1000
	0,10 $\mu$ F	4,0 × 6,9 × 11,5	B32561-J6104-+***	1090	1700	700
	0,15 $\mu$ F	5,2 × 7,7 × 11,5	B32561-J6154-+***	850	1300	500
	0,22 $\mu$ F	6,6 × 8,5 × 11,5	B32561-J6224-+	–	–	300

Capacitance tolerance:  $\pm 20\% \hat{=} M, \pm 10\% \hat{=} K, \pm 5\% \hat{=} J$

Special dimensions available upon request.


For corresponding design rules, refer to chapter "General technical information", page 290.

1) + Code letter for capacitance tolerance

\*\*\* Code number for packing: Ammo pack = 289, reel = 189

The ordering code for untaped components ends after the tolerance code letter.

2) Taping upon request


**B 32 562**
**Ordering codes and packing units, lead spacing 15 mm**

$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs)		
				Ammo pack	Reel	Untaped
100 Vdc (63 Vac)	1,0 $\mu$ F	3,2 × 6,3 × 16,5	B32562-J1105-+***	1750	2000	1500
	1,5 $\mu$ F	4,0 × 7,3 × 16,5	B32562-J1155-+***	1460	1500	1000
	2,2 $\mu$ F	4,9 × 8,0 × 16,5	B32562-J1225-+***	1190	1300	800
	3,3 $\mu$ F	6,0 × 9,3 × 16,5	B32562-J1335-+***	960	1000	500
	4,7 $\mu$ F	7,3 × 10,6 × 16,5	B32562-J1475-+***	790	900	400
	6,8 $\mu$ F	9,0 × 11,8 × 16,5	B32562-J1685-+***	640	700	290
	10 $\mu$ F	11,8 × 13,0 × 16,5	B32562-J1106-+	–	–	200
250 Vdc (160 Vac)	0,22 $\mu$ F	3,2 × 5,6 × 16,5	B32562-J3224-+***	1750	2000	1700
	0,33 $\mu$ F	4,0 × 6,2 × 16,5	B32562-J3334-+***	1460	1500	1200
	0,47 $\mu$ F	5,0 × 6,7 × 16,5	B32562-J3474-+***	1190	1300	950
	0,68 $\mu$ F	6,0 × 7,8 × 16,5	B32562-J3684-+***	960	1000	500
	1,0 $\mu$ F	7,0 × 9,3 × 16,5	B32562-J3105-+***	830	900	500
	1,5 $\mu$ F	8,7 × 11,0 × 16,5	B32562-J3155-+***	660	700	300
	2,2 $\mu$ F	10,7 × 12,8 × 16,5	B32562-J3225-+	–	–	200
	3,3 $\mu$ F	13,9 × 14,5 × 16,5	B32562-J3335-+	–	–	150
400 Vdc (200 Vac)	47 nF	3,3 × 5,6 × 16,5	B32562-J6473-+***	1870	2100	1800
	68 nF	3,3 × 5,6 × 16,5	B32562-J6683-+***	1800	2000	1800
	0,10 $\mu$ F	3,3 × 5,6 × 16,5	B32562-J6104-+***	1700	1900	1600
	0,15 $\mu$ F	3,9 × 6,5 × 16,5	B32562-J6154-+***	1420	1600	1200
	0,22 $\mu$ F	4,7 × 7,5 × 16,5	B32562-J6224-+***	1240	1300	850
	0,33 $\mu$ F	6,0 × 8,3 × 16,5	B32562-J6334-+***	960	1000	500
	0,47 $\mu$ F	7,3 × 9,3 × 16,5	B32562-J6474-+***	790	900	450
	0,68 $\mu$ F	8,9 × 10,8 × 16,5	B32562-J6684-+***	640	700	300
	1,0 $\mu$ F	10,9 × 12,5 × 16,5	B32562-J6105-+	–	–	200
630 Vdc (350 Vac)	0,10 $\mu$ F	6,2 × 9,3 × 16,5	B32562-J8104-+	–	–	700
	0,15 $\mu$ F	7,6 × 10,8 × 16,5	B32562-J8154-+	–	–	500
	0,22 $\mu$ F	9,2 × 12,2 × 16,5	B32562-J8224-+	–	–	350
	0,33 $\mu$ F	11,2 × 14,2 × 16,5	B32562-J8334-+	–	–	250
	0,47 $\mu$ F	13,5 × 16,3 × 16,5	B32562-J8474-+	–	–	180

 Capacitance tolerance:  $\pm 20\% \hat{=} M, \pm 10\% \hat{=} K, \pm 5\% \hat{=} J$ 

Special dimensions available upon request.

For corresponding design rules, refer to chapter "General technical information", page 290.

1) + Code letter for capacitance tolerance

\*\*\* Code number for packing: Ammo pack = 289, reel = 189

The ordering code for untaped components ends after the tolerance code letter.

**Ordering codes and packing units, lead spacing 22,5 mm**


$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs) Untaped
100 Vdc (63 Vac)	3,3 $\mu$ F	5,0 $\times$ 8,2 $\times$ 24,0	B32563-J1335-+	1900
	4,7 $\mu$ F	5,9 $\times$ 9,0 $\times$ 24,0	B32563-J1475-+	1600
	6,8 $\mu$ F	7,0 $\times$ 10,5 $\times$ 24,0	B32563-J1685-+	920
	10 $\mu$ F	8,6 $\times$ 12,2 $\times$ 24,0	B32563-J1106-+	960
	15 $\mu$ F	10,9 $\times$ 14,0 $\times$ 24,0	B32563-J1156-+	620
	22 $\mu$ F	12,8 $\times$ 17,2 $\times$ 24,0	B32563-J1226-+	360
250 Vdc (160 Vac)	0,68 $\mu$ F	4,8 $\times$ 7,2 $\times$ 24,0	B32563-J3684-+	1760
	1,0 $\mu$ F	5,6 $\times$ 8,2 $\times$ 24,0	B32563-J3105-+	1140
	1,5 $\mu$ F	6,9 $\times$ 9,5 $\times$ 24,0	B32563-J3155-+	920
	2,2 $\mu$ F	8,3 $\times$ 11,2 $\times$ 24,0	B32563-J3225-+	740
	3,3 $\mu$ F	10,1 $\times$ 13,5 $\times$ 24,0	B32563-J3335-+	700
	4,7 $\mu$ F	12,2 $\times$ 15,5 $\times$ 24,0	B32563-J3475-+	390
400 Vdc (200Vac)	0,33 $\mu$ F	5,1 $\times$ 8,0 $\times$ 24,0	B32563-J6334-+	1700
	0,47 $\mu$ F	5,7 $\times$ 8,3 $\times$ 24,0	B32563-J6474-+	1660
	0,68 $\mu$ F	6,9 $\times$ 9,6 $\times$ 24,0	B32563-J6684-+	920
	1,0 $\mu$ F	8,3 $\times$ 11,2 $\times$ 24,0	B32563-J6105-+	850
	1,5 $\mu$ F	10,3 $\times$ 13,2 $\times$ 24,0	B32563-J6155-+	660
	2,2 $\mu$ F	12,6 $\times$ 15,5 $\times$ 24,0	B32563-J6225-+	360

Capacitance tolerance:  $\pm 20\% \hat{=}$  M,  $\pm 10\% \hat{=}$  K,  $\pm 5\% \hat{=}$  J

Special dimensions available upon request.

For corresponding design rules, refer to chapter "General technical information", page 290.

1) + Code letter for capacitance tolerance


**B 32 564**
**Ordering codes and packing units, lead spacing 27,5 mm**

$V_R$ ( $V_{rms}$ , $f \leq 60$ Hz)	$C_R$	Maximum dimensions $b \times h \times l$ (mm)	Ordering code <sup>1)</sup>	Packing units (pcs) Untaped
100 Vdc (63Vac)	4,7 $\mu$ F	5,6 $\times$ 8,3 $\times$ 29,0	B32564-J1475-+	1000
	6,8 $\mu$ F	6,3 $\times$ 9,5 $\times$ 29,0	B32564-J1685-+	820
	10 $\mu$ F	7,6 $\times$ 11,0 $\times$ 29,0	B32564-J1106-+	680
	15 $\mu$ F	9,1 $\times$ 13,5 $\times$ 29,0	B32564-J1156-+	430
	22 $\mu$ F	11,0 $\times$ 16,0 $\times$ 29,0	B32564-J1226-+	320
	33 $\mu$ F	13,0 $\times$ 19,8 $\times$ 29,0	B32564-J1336-+	360
250 Vdc (160 Vac)	1,0 $\mu$ F	5,1 $\times$ 7,6 $\times$ 29,0	B32564-J3105-+	1620
	1,5 $\mu$ F	5,3 $\times$ 10,2 $\times$ 29,0	B32564-J3155-+	970
	2,2 $\mu$ F	6,4 $\times$ 11,8 $\times$ 29,0	B32564-J3225-+	920
	3,3 $\mu$ F	7,9 $\times$ 14,0 $\times$ 29,0	B32564-J3335-+	750
	4,7 $\mu$ F	9,6 $\times$ 15,8 $\times$ 29,0	B32564-J3475-+	400
	6,8 $\mu$ F	11,9 $\times$ 18,0 $\times$ 29,0	B32564-J3685-+	300
	10 $\mu$ F	13,8 $\times$ 22,5 $\times$ 29,0	B32564-J3106-+	280
400 Vdc (200 Vac)	1,0 $\mu$ F	6,8 $\times$ 11,2 $\times$ 29,0	B32564-J6105-+	750
	1,5 $\mu$ F	7,8 $\times$ 14,2 $\times$ 29,0	B32564-J6155-+	750
	2,2 $\mu$ F	9,6 $\times$ 16,4 $\times$ 29,0	B32564-J6225-+	400
	3,3 $\mu$ F	12,2 $\times$ 18,8 $\times$ 29,0	B32564-J6335-+	330
	4,7 $\mu$ F	14,2 $\times$ 22,8 $\times$ 29,0	B32564-J6475-+	260
420 Vdc (200 Vac)	4,7 $\mu$ F	16,0 $\times$ 20,0 $\times$ 29,0	B32564-T6475-K	290
	5,6 $\mu$ F	16,0 $\times$ 20,0 $\times$ 29,0	B32564-T6565-K	350
	6,8 $\mu$ F	16,0 $\times$ 20,0 $\times$ 29,0	B32564-T6685-K	290

 Capacitance tolerance:  $\pm 20\% \hat{=}$  M,  $\pm 10\% \hat{=}$  K,  $\pm 5\% \hat{=}$  J

Special dimensions available upon request.

For corresponding design rules, refer to chapter "General technical information", page 290.


1) + Code letter for capacitance tolerance



**Technical data**

Climatic category in accordance with IEC 60068-1	55/100/56 <sup>1)</sup>			
Lower category temperature $T_{\min}$	- 55 °C			
Upper category temperature $T_{\max}$	+ 100 °C (+ 125 °C for 1000 h and $V_C = 0,5 \cdot V_R$ )			
Damp heat test	56 days/40 °C/93 % relative humidity			
Limit values after damp heat test <sup>1)</sup>	Capacitance change $ \Delta C/C $	≤ 5 %		
	Dissipation factor change $\Delta \tan \delta$	≤ 3 · 10 <sup>-3</sup> (at 1 kHz)		
		≤ 5 · 10 <sup>-3</sup> (at 10 kHz)		
	Insulation resistance $R_{is}$ or time constant $\tau = C_R \cdot R_{is}$	≥ 50 % of minimum as-delivered values		
Reliability:				
Reference conditions	0,5 · $V_R$ ; 40 °C			
Failure rate	2 · 10 <sup>-9</sup> /h = 2 fit			
	For a conversion table for other operating conditions and temperatures, refer to chapter "Quality assurance", page 327.			
Service life	200 000 h			
Failure criteria:				
Total failure	Short circuit or open circuit			
Failure due to variation of parameters	Capacitance change $ \Delta C/C $	> 10 %		
	Dissipation factor $\tan \delta$	> 2 · upper limit value		
	Insulation resistance $R_{is}$ or time constant $\tau = C_R \cdot R_{is}$	< 150 MΩ ( $C_R \leq 0,33 \mu\text{F}$ ) < 50 s ( $C_R > 0,33 \mu\text{F}$ )		
DC test voltage	1,4 · $V_R$ , 2 s			
Category voltage $V_C$	$T \leq 85 \text{ °C}$	$V_C = 1,0 \cdot V_R$	$V_{C,rms} = 1,0 \cdot V_{rms}$	
Operation with dc voltage or ac voltage $V_{rms}$ up to 60 Hz	$T \leq 100 \text{ °C}$	$V_C = 0,8 \cdot V_R$	$V_{C,rms} = 0,8 \cdot V_{rms}$	
Operating voltage for short operating periods	$T \leq 85 \text{ °C}$	$V = 1,25 \cdot V_C$ , max. 2000 h	$V = 1,0 \cdot V_{C,rms}$ , max. 2000 h	
	$T \leq 100 \text{ °C}$	$V = 1,25 \cdot V_C$ , max. 2000 h	$V = 1,0 \cdot V_{C,rms}$ , max. 2000 h	
	$T \leq 125 \text{ °C}$	$V = 0,5 \cdot V_R$ , max. 1000 h	$V = 0,5 \cdot V_{rms}$ , max. 1000 h	
Dissipation factor $\tan \delta$ (in 10 <sup>-3</sup> ) at 20 °C (upper limit values)		$C_R \leq 0,1 \mu\text{F}$	$0,1 \mu\text{F} < C_R \leq 1 \mu\text{F}$	$C_R > 1 \mu\text{F}$
	at 1 kHz	8	8	10
	10 kHz	15	15	—
	100 kHz	30	—	—
Insulation resistance $R_{is}$ or time constant $\tau = C_R \cdot R_{is}$ at 20 °C, rel. humidity ≤ 65 % (minimum as-delivered values)	$V_R$	$C_R \leq 0,33 \mu\text{F}$	$C_R > 0,33 \mu\text{F}$	
	≤ 100 Vdc	3750 MΩ	1250 s	
	≥ 250 Vdc	7500 MΩ	2500 s	


1) Test criteria must be met after exposure to damp heat for 21 days.



B 32 560 ...

B 32 564

Impedance  $Z$   
versus  
frequency  $f$   
(typical values)

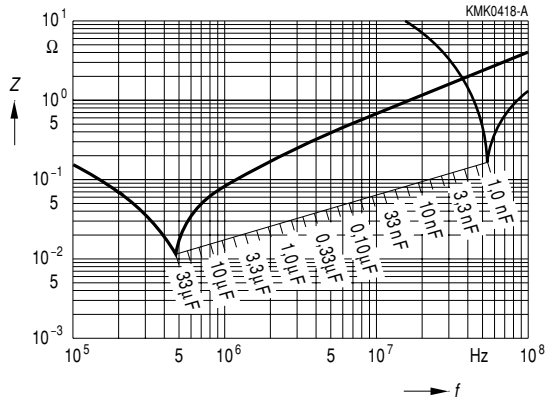

### Pulse handling capability

Maximum permissible voltage change per unit of time for non-sinusoidal voltages (pulse, sawtooth).

$V_R$	Max. rate of voltage rise $V_{pp}/\tau$ in $V/\mu s$ (for $V_{pp} = V_R$ )				
	Lead spacing				
	7,5 mm	10 mm	15 mm	22,5 mm	27,5 mm
63 Vdc	120	–	–	–	–
100 Vdc	150	75	50	50	25
250 Vdc	200	150	100	100	50
400 Vdc	275	175	125	125	60
420 Vdc	–	–	–	–	60
630 Vdc	320	–	150	–	–

For  $V_{pp} < V_R$ , the permissible voltage rise rate value  $V_{pp}/\tau$  may be multiplied by the factor  $V_R/V_{pp}$ . Also refer to the calculation example in chapter “General technical information”, page 302.



$V_R$	Pulse characteristic $k_0$ in $V^2/\mu s$ (for $V_{pp} \leq V_R$ )				
	Lead spacing				
	7,5 mm	10 mm	15 mm	22,5 mm	27,5 mm
63 Vdc	15 000	–	–	–	–
100 Vdc	30 000	15 000	10 000	10 000	5 000
250 Vdc	100 000	75 000	50 000	50 000	25 000
400 Vdc	220 000	140 000	100 000	100 000	50 000
420 Vdc	–	–	–	–	50 000
630 Vdc	400 000	–	190 000	–	–

Permissible ac voltage  $V_{rms}$  versus frequency  $f$

Lead spacing 7,5 mm



63 Vdc/ 40 Vac


100 Vdc/ 63 Vac

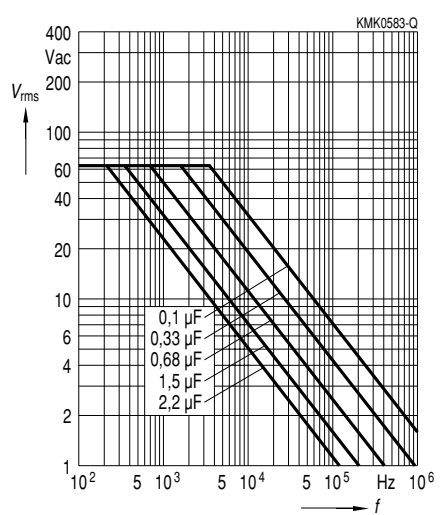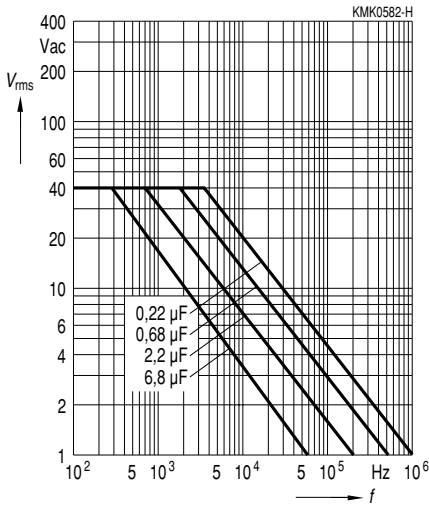

250Vdc/ 160Vac

400 Vdc/ 200 Vac

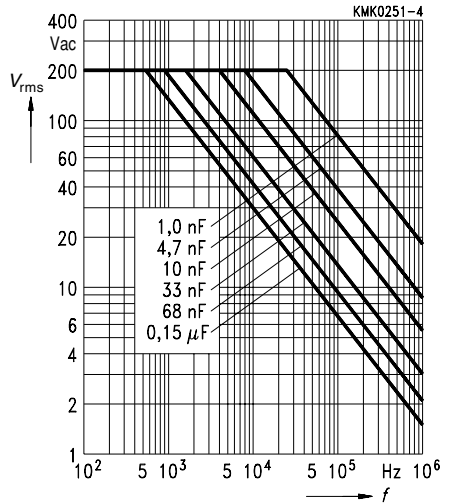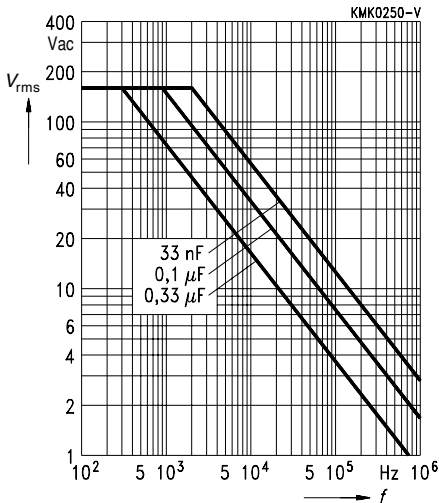




B 32 560

**Permissible ac voltage  $V_{rms}$  versus frequency  $f$**   
**Lead spacing 7,5 mm**


630 Vdc/ 400 Vac

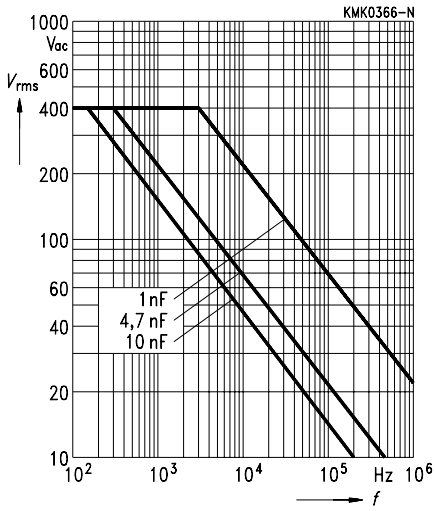


Permissible ac voltage  $V_{rms}$  versus frequency  $f$

Lead spacing 10 mm


100 Vdc/63 Vac

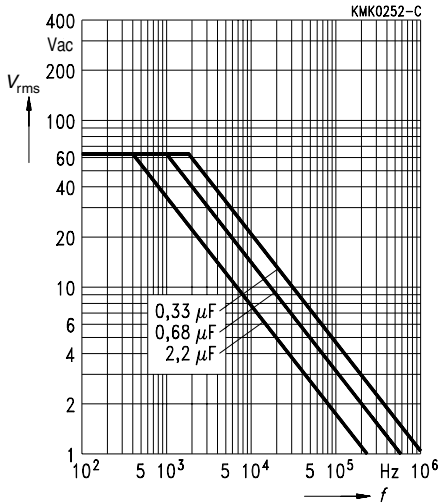


250 Vdc/ 160 Vac

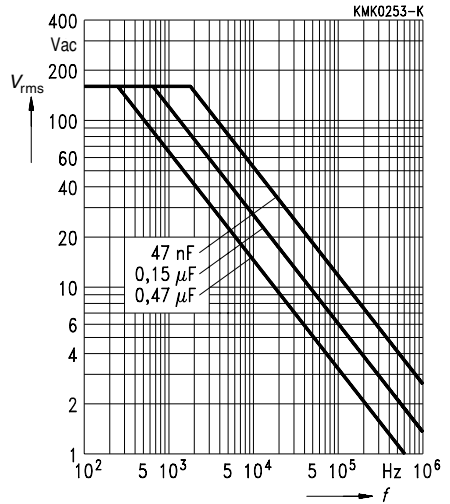

400 Vdc/200 Vac

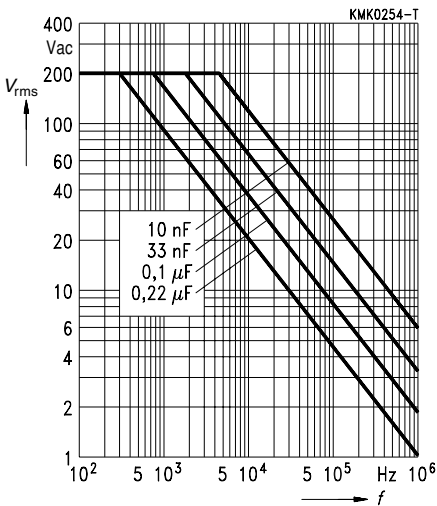




B 32 562


Permissible ac voltage  $V_{rms}$  versus frequency  $f$

Lead spacing 15 mm


100 Vdc/63 Vac

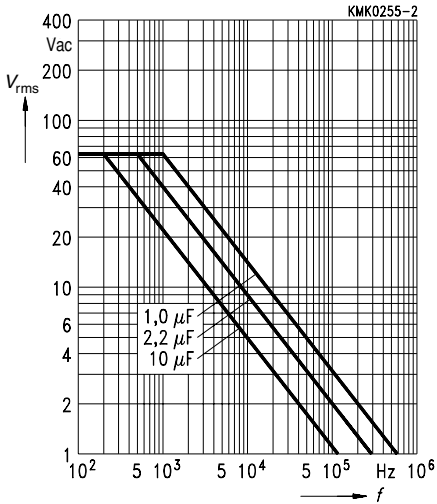


250 Vdc/ 160 Vac

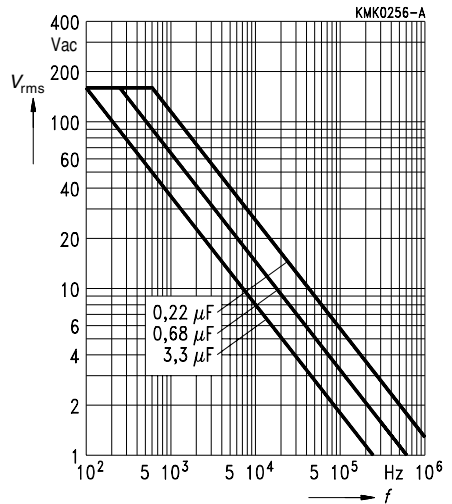

400 Vdc/200 Vac

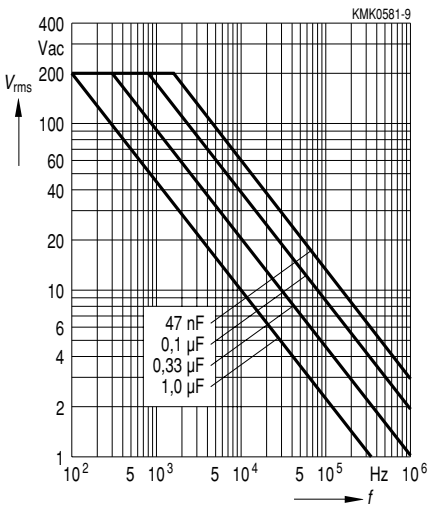


630 Vdc/350 Vac

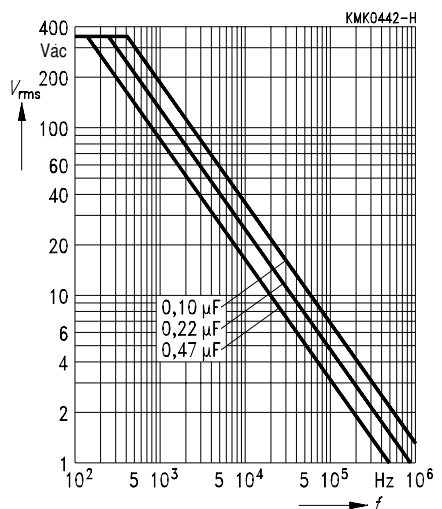


Permissible ac voltage  $V_{rms}$  versus frequency  $f$

Lead spacing 22,5 mm


100 Vdc/63 Vac

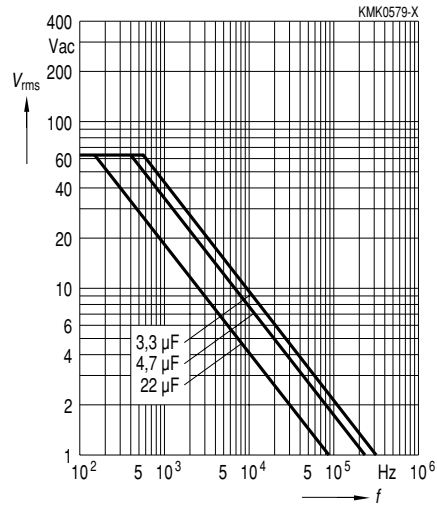


250 Vdc/160 Vac

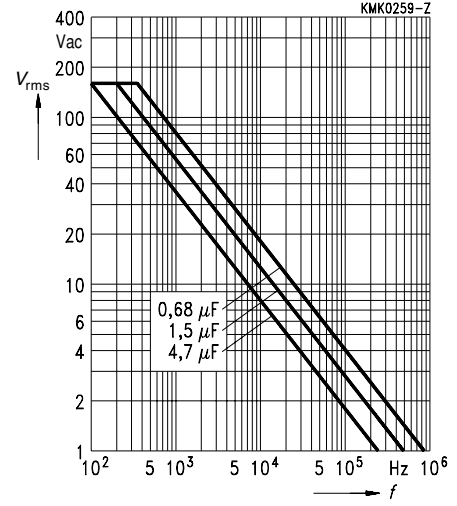

400 Vdc/200 Vac

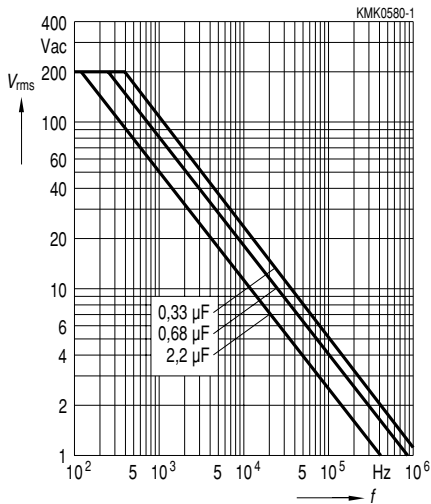




B 32 564


Permissible ac voltage  $V_{rms}$  versus frequency  $f$

Lead spacing 27,5 mm


100 Vdc/63 Vac

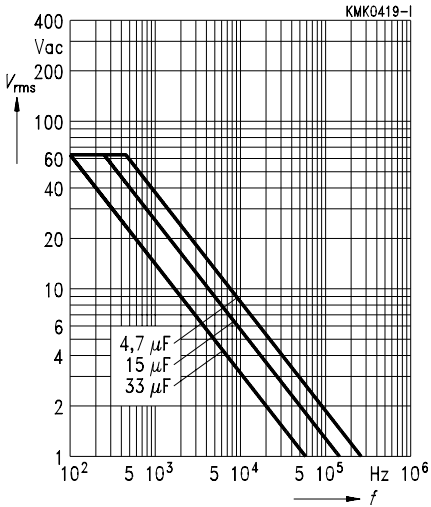

250 Vdc/ 160 Vac

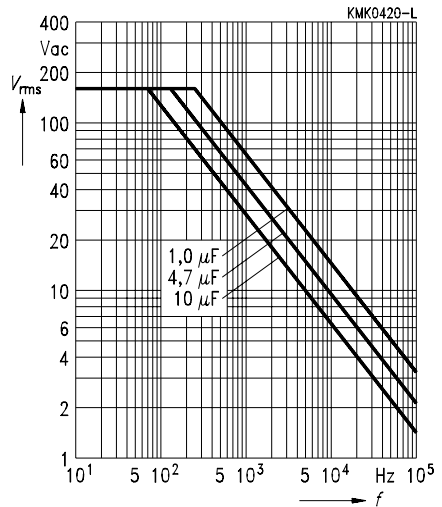

400 Vdc/200 Vac

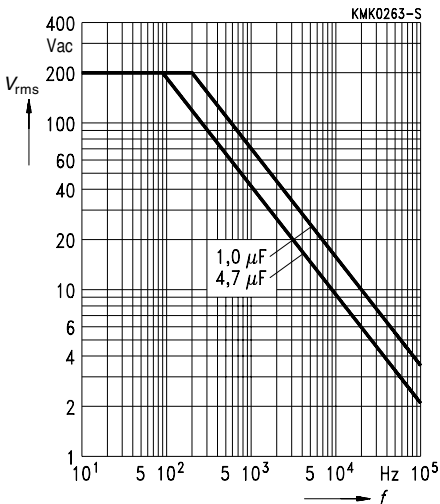



**Herausgegeben von EPCOS AG**

**Marketing Kommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND**

© EPCOS AG 2000. Alle Rechte vorbehalten. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Mit den Angaben in dieser Broschüre werden die Bauelemente spezifiziert, keine Eigenschaften zugesichert. Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland.

Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG**

**Marketing Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.