

NOTES:

① MAT'L: COPPER (STOCK TKN. $\frac{.031}{.79}$)

② PLATING: ELECTRO TIN (.0003 MIN)

③ TIN-PLATED BRASS FUNNEL FERRULE


NYLON INSULATION (COLOR CODED BLUE) 2.06

STUD SIZES: ($\pm .005$)

- 02 = .094
- 04 = .119
- 06 = .146
- 08 = .173
- 10 = .198
- 14 = .265
- 56 = .328
- 38 = .390

"UL" LISTING # E32244
 "CSA" LISTING # 18689

WIRE SIZE: 16 - 14 AWG
 10 - 25 MM²

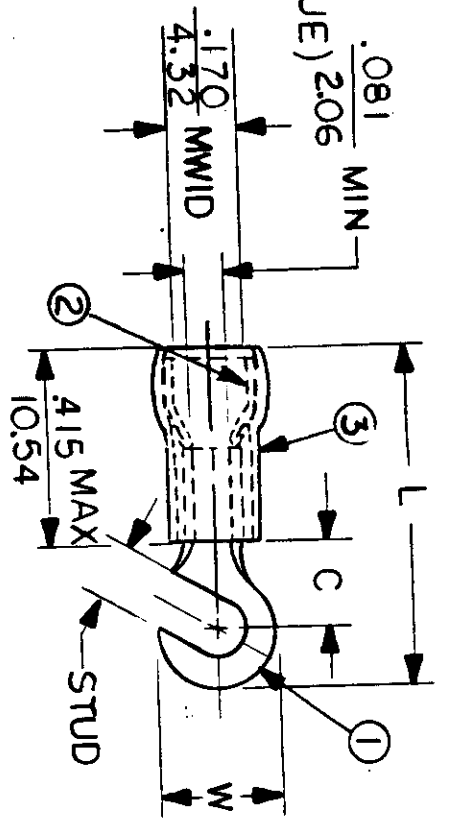

ALL DIMENSIONS = INCHES

(MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES
BB-819-	$\frac{.350}{8.89}$	$\frac{.271}{6.88}$	$\frac{.917}{23.29}$	06, 08, 10

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED	REFERENCE	SCALE: NTS	DATE	TITLE:	DWG. NO.

DRAWN BY: JJ DATE: 11-9-84
 CHKD BY: GZ DATE: 11-14-84
 APPRD BY: DATE:

HOO K TONGUE TERMINAL AVIKRIMP 800-SERIES

EIC mox INCORPORATED

CUSTOMER DWG