


## AC and Pulse Metallized Polypropylene Film Capacitors MKP Radial Potted Type

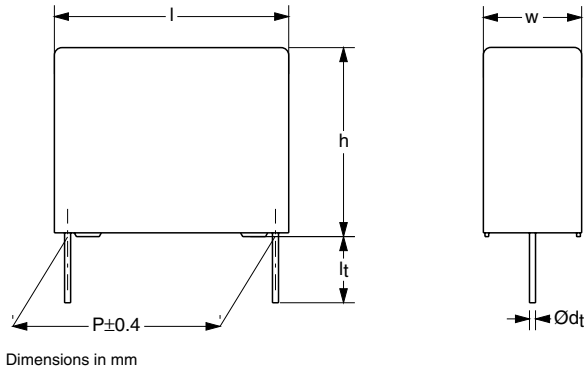

### APPLICATIONS

Low losses due to low contact resistance and low loss dielectric make these products suitable for applications where high currents at high frequency occur or high stability is preferred. Their small dimensions make them ideal for circuits with high packaging density.

### MARKING

C-value; tolerance; rated voltage; manufacturer's type designation; code for dielectric material; manufacturer's emblem; code for factory of origin; year and week of manufacture

### DIELECTRIC

Polypropylene film

### ELECTRODES

Metallized film

### ENCAPSULATION

Flame retardant plastic case and epoxy resin (UL-class 94 V-0)

### CONSTRUCTION

Wound mono construction

### LEADS

Tinned wire

### CAPACITANCE RANGE (E24 SERIES)

0.01 to 6.2  $\mu$ F

### FEATURES

10 to 27.5 mm pitch. Supplied loose in box and taped on reel

Lead (Pb)-free product

RoHS-compliant product

### CAPACITANCE TOLERANCE

$\pm 5\%$ ;  $\pm 3.5\%$

### RATED (DC) VOLTAGE

160 V; 250 V; 400 V; 630 V

### RATED (AC) VOLTAGE

100 V; 160 V; 200 V; 220 V

### RATED PEAK-TO-PEAK VOLTAGE

280 V; 450 V; 560 V; 620 V

### CLIMATIC CATEGORY

55/085/56

### RATED TEMPERATURE

85 °C

### MAXIMUM APPLICATION TEMPERATURE

85 °C

### REFERENCE SPECIFICATIONS

IEC 60384-17

### PERFORMANCE GRADE

Grade 1 (long life)

### STABILITY GRADE

100 V, 160 V versions: grade 2

250 V to 630 V versions; pitch 5 to 15 mm: grade 2

250 V to 630 V versions; pitch 22.5 and 27.5 mm: grade 1

### DETAIL SPECIFICATION

For more detailed data and test requirements see "Type detail specification HQN-384-17/103"



**RoHS**  
COMPLIANT

# MKP 379

Vishay BCcomponents

AC and Pulse Metallized Polypropylene  
Film Capacitors MKP Radial Potted Type



## COMPOSITION OF CATALOG NUMBER

TYPE AND PITCHES	
379	10.0 mm
	15.0 mm
	22.5 mm
	27.5 mm

**CAPACITANCE**  
(numerically)

MULTIPLIER (nF)	
1	3
10	4
100	5

Example:  
104 = 10 x 10 = 100 nF

2222	379	XX	XX	X
BFC2*	379	XX	XX	X

\* Use this partnumber for those with access to the Vishay's SAP system and Partners website within the Americas

TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES				
			C-TOL	160 V	250 V	400 V	630 V
379	loose in box	lead length 4.0 + 1/- 0.5 mm or 3.5 ± 0.3 mm	± 5 %	34	44	54	64
			ON REQUEST				
379	taped on reel	H = 18.5 mm; P <sub>0</sub> = 12.7 mm; reel diameter 500 mm	± 5 %	35	45	55	65



**SPECIFIC REFERENCE DATA (160 VDC)**

DESCRIPTION	VALUE	
	at 10 kHz	at 100 kHz
Tangent of loss angle:		
C ≤ 0.075 μF	≤ 5 × 10 <sup>-4</sup>	≤ 20 × 10 <sup>-4</sup>
0.075 μF < C ≤ 0.11 μF	≤ 5 × 10 <sup>-4</sup>	≤ 25 × 10 <sup>-4</sup>
0.11 μF < C ≤ 0.16 μF	≤ 10 × 10 <sup>-4</sup>	≤ 30 × 10 <sup>-4</sup>
0.18 μF < C ≤ 0.3 μF	≤ 10 × 10 <sup>-4</sup>	≤ 35 × 10 <sup>-4</sup>
0.3 μF < C ≤ 0.39 μF	≤ 10 × 10 <sup>-4</sup>	≤ 40 × 10 <sup>-4</sup>
0.39 μF < C ≤ 0.56 μF	≤ 10 × 10 <sup>-4</sup>	≤ 45 × 10 <sup>-4</sup>
0.56 μF < C ≤ 0.68 μF	≤ 10 × 10 <sup>-4</sup>	≤ 50 × 10 <sup>-4</sup>
0.68 μF < C ≤ 0.82 μF	≤ 10 × 10 <sup>-4</sup>	≤ 55 × 10 <sup>-4</sup>
0.82 μF < C ≤ 0.91 μF	≤ 10 × 10 <sup>-4</sup>	≤ 60 × 10 <sup>-4</sup>
0.91 μF < C ≤ 1.0 μF	≤ 10 × 10 <sup>-4</sup>	≤ 65 × 10 <sup>-4</sup>
1.0 μF < C ≤ 1.2 μF	≤ 10 × 10 <sup>-4</sup>	≤ 70 × 10 <sup>-4</sup>
1.2 μF < C ≤ 1.3 μF	≤ 10 × 10 <sup>-4</sup>	≤ 75 × 10 <sup>-4</sup>
1.3 μF < C ≤ 1.5 μF	≤ 10 × 10 <sup>-4</sup>	≤ 80 × 10 <sup>-4</sup>
1.5 μF < C ≤ 1.6 μF	≤ 10 × 10 <sup>-4</sup>	≤ 85 × 10 <sup>-4</sup>
1.6 μF < C ≤ 1.8 μF	≤ 10 × 10 <sup>-4</sup>	≤ 90 × 10 <sup>-4</sup>
1.8 μF < C ≤ 2.0 μF	≤ 10 × 10 <sup>-4</sup>	≤ 95 × 10 <sup>-4</sup>
2.0 μF < C ≤ 2.2 μF	≤ 10 × 10 <sup>-4</sup>	≤ 100 × 10 <sup>-4</sup>
2.2 μF < C ≤ 2.4 μF	≤ 15 × 10 <sup>-4</sup>	≤ 105 × 10 <sup>-4</sup>
2.4 μF < C ≤ 2.7 μF	≤ 15 × 10 <sup>-4</sup>	≤ 110 × 10 <sup>-4</sup>
2.7 μF < C ≤ 3.0 μF	≤ 15 × 10 <sup>-4</sup>	≤ 115 × 10 <sup>-4</sup>
3.0 μF < C ≤ 3.3 μF	≤ 15 × 10 <sup>-4</sup>	≤ 125 × 10 <sup>-4</sup>
3.3 μF < C ≤ 3.6 μF	≤ 15 × 10 <sup>-4</sup>	≤ 130 × 10 <sup>-4</sup>
3.6 μF < C ≤ 3.9 μF	≤ 15 × 10 <sup>-4</sup>	≤ 135 × 10 <sup>-4</sup>
3.9 μF < C ≤ 4.3 μF	≤ 15 × 10 <sup>-4</sup>	≤ 145 × 10 <sup>-4</sup>
4.3 μF < C ≤ 4.7 μF	≤ 20 × 10 <sup>-4</sup>	≤ 155 × 10 <sup>-4</sup>
4.7 μF < C ≤ 5.1 μF	≤ 20 × 10 <sup>-4</sup>	≤ 160 × 10 <sup>-4</sup>
5.1 μF < C ≤ 5.6 μF	≤ 20 × 10 <sup>-4</sup>	≤ 175 × 10 <sup>-4</sup>
5.6 μF < C ≤ 6.2 μF	≤ 20 × 10 <sup>-4</sup>	≤ 185 × 10 <sup>-4</sup>
Rated voltage pulse slope (dU/dt) <sub>R</sub> :		
l = 12.5 mm	60 V/μs	
l = 17.5 mm	50 V/μs	
l = 26.0 mm	25 V/μs	
l = 31.0 mm	15 V/μs (b < 15 mm)	
l = 31.0 mm	7.5 V/μs (b ≥ 15 mm)	
R between leads for C ≤ 1.0 μF at 100 V; 1 minute	> 100000 MΩ	
RC between leads, for C > 1 μF at 100 V; 1 minute	> 100000 s	
R between interconnected leads and case; 100 V; 1 minute	> 100000 MΩ	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	256 V; 1 minute	
Withstanding (DC)voltage between leads and case	2840 V; 1 minute	



$U_{Rdc} = 160 \text{ V}$ ;  $U_{Rac} = 100 \text{ V}$ ;  $U_{p-p} = 280 \text{ V}$

C ( $\mu\text{F}$ )	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING			
			LOOSE IN BOX		REEL	
			$l_t = 4.0 + 1.0/-0.5 \text{ mm}^{(1)}$		SPQ	SPQ
			C-tol = $\pm 5 \%$	last 5 digits of catalog number		
<b>Pitch = <math>10.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>						
0.075 0.082 0.091 0.1	4.0 × 10.0 × 12.5	0.6	34753 34823 34913 34104	1000	1400	
0.11 0.12 0.13 0.15	5.0 × 11.0 × 12.5	0.85	34114 34124 34134 34154	1000	1100	
0.16	6.0 × 12.0 × 12.5	1.0	34164	1000	900	
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>						
0.18 0.2 0.22 0.24 0.27	5.0 × 11.0 × 17.5	1.2	34184 34204 34224 34244 34274	1000	1100	
0.3 0.33 0.36 0.39	6.0 × 12.0 × 17.5	1.4	34304 34334 34364 34394	1000	900	
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
0.43 0.47 0.51	7.0 × 13.5 × 17.5	1.9	34434 34474 34514	1000	800	
0.56 0.62 0.68 0.75	8.5 × 15.0 × 17.5	2.6	34564 34624 34684 34754	1000	650	
<b>Pitch = <math>22.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
0.82 0.91	7.0 × 16.5 × 26.0	3.2	34824 34914	200	550	
1 1.1 1.2 1.3	8.5 × 18.0 × 26.0	4.4	34105 34115 34125 34135	200	450	
1.5 1.6 1.8	10.0 × 19.5 × 26.0	5.5	34155 34165 34185	200	350	
<b>Pitch = <math>27.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
2 2.2 2.4	11.0 × 21.0 × 31.0	7.8	34205 34225 34245	100		
2.7 3 3.3	13.0 × 23.0 × 31.0	10.4	34275 34305 34335	100		



C ( $\mu\text{F}$ )	DIMENSIONS W x H x L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING				
			LOOSE IN BOX		REEL		
			$l_t = 4.0 + 1.0/- 0.5 \text{ mm}^{(1)}$			SPQ	SPQ
			C-tol = $\pm 5 \%$	last 5 digits of catalog number	SPQ		
3.6 3.9 4.3	15.0 x 25.0 x 31.0	12.8	34365 34395 34435		100		
4.7 5.1 5.6 6.2	18.0 x 28.0 x 31.0	17.2	34475 34515 34565 34625	100			

**Note**

1.  $l_t = 4.0 + 1/- 0.5 \text{ mm}$  for pitch = 10 mm and  $3.5 \pm 0.3 \text{ mm}$  for pitch = 15 mm; 22.5 mm and 27.5 mm.

**SPECIFIC REFERENCE DATA (250 VDC)**

DESCRIPTION	VALUE	
	at 10 kHz	at 100 kHz
Tangent of loss angle:		
0.047 $\mu\text{F} < C \leq 0.075 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 20 \times 10^{-4}$
0.075 $\mu\text{F} < C \leq 0.111 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 25 \times 10^{-4}$
0.11 $\mu\text{F} < C \leq 0.18 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 30 \times 10^{-4}$
0.18 $\mu\text{F} < C \leq 0.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 35 \times 10^{-4}$
0.3 $\mu\text{F} < C \leq 0.39 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 40 \times 10^{-4}$
0.39 $\mu\text{F} < C \leq 0.56 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 40 \times 10^{-4}$
0.56 $\mu\text{F} < C \leq 0.68 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 50 \times 10^{-4}$
0.68 $\mu\text{F} < C \leq 0.82 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 55 \times 10^{-4}$
0.82 $\mu\text{F} < C \leq 0.91 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 60 \times 10^{-4}$
0.91 $\mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 65 \times 10^{-4}$
1.0 $\mu\text{F} < C \leq 1.2 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 70 \times 10^{-4}$
1.2 $\mu\text{F} < C \leq 1.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 75 \times 10^{-4}$
1.3 $\mu\text{F} < C \leq 1.5 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 80 \times 10^{-4}$
1.5 $\mu\text{F} < C \leq 1.6 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 85 \times 10^{-4}$
1.6 $\mu\text{F} < C \leq 1.8 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 90 \times 10^{-4}$
1.8 $\mu\text{F} < C \leq 2.0 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 95 \times 10^{-4}$
2.0 $\mu\text{F} < C \leq 2.2 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 100 \times 10^{-4}$
2.2 $\mu\text{F} < C \leq 2.4 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 105 \times 10^{-4}$
2.4 $\mu\text{F} < C \leq 2.7 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 110 \times 10^{-4}$
2.7 $\mu\text{F} < C \leq 3.0 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 115 \times 10^{-4}$
3.0 $\mu\text{F} < C \leq 3.3 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 125 \times 10^{-4}$
3.3 $\mu\text{F} < C \leq 3.6 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 130 \times 10^{-4}$
3.6 $\mu\text{F} < C \leq 3.9 \mu\text{F}$	$\leq 15 \times 10^{-4}$	$\leq 135 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) <sub>R</sub> :		
l = 12.5 mm	70 V/ $\mu\text{s}$	
l = 17.5 mm	60 V/ $\mu\text{s}$	
l = 26.0 mm	30 V/ $\mu\text{s}$	
l = 31.0 mm	20 V/ $\mu\text{s}$ (b < 15 mm)	
l = 31.0 mm	10 V/ $\mu\text{s}$ (b $\geq$ 15 mm)	
R between leads for C $\leq$ 1.0 $\mu\text{F}$ at 100 V; 1 minute	> 100000 M $\Omega$	
RC between leads, for C > 1 $\mu\text{F}$ at 100 V; 1 minute	> 100000 s	
R between interconnected leads and case; 100 V; 1 minute	> 100000 M $\Omega$	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	400 V; 1 minute	
Withstanding (DC)voltage between leads and case	2840 V; 1 minute	



$U_{Rdc} = 250 \text{ V}$ ;  $U_{Rac} = 160 \text{ V}$ ;  $U_{p-p} = 450 \text{ V}$

C ( $\mu\text{F}$ )	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING		
			LOOSE IN BOX		REEL
			$l_t = 4.0 + 1.0/-0.5 \text{ mm}^{(1)}$		SPQ
			C-tol = $\pm 5 \%$	LAST 5 DIGITS OF CATALOG NUMBER	
<b>Pitch = <math>10.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>					
0.047 0.051 0.056 0.062 0.068	4.0 × 10.0 × 12.5	0.6	44473 44513 44563 44623 44683	1000	1400
0.075 0.082 0.091	5.0 × 11.0 × 12.5	0.85	44753 44823 44913	1000	1100
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>					
0.1 0.11 0.12 0.13 0.15 0.16	5.0 × 11.0 × 17.5	1.2	44104 44114 44124 44134 44154 44164	1000	1100
0.18 0.2 0.22 0.24	6.0 × 12.0 × 17.5	1.4	44184 44204 44224 44244	1000	900
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
0.27 0.3 0.33	7.0 × 13.5 × 17.5	1.9	44274 44304 44334	1000	800
0.36 0.39 0.43 0.47	8.5 × 15.0 × 17.5	2.6	44364 44394 44434 44474	1000	650
<b>Pitch = <math>22.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
0.51 0.56 0.62	7.0 × 16.5 × 26.0	3.2	44514 44564 44624	200	550
0.68 0.75 0.82 0.91	8.5 × 18.0 × 26.0	4.4	44684 44754 44824 44914	200	450
1 1.1 1.2	10.0 × 19.5 × 26.0	5.5	44105 44115 44125	200	350
<b>Pitch = <math>27.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
1.3 1.5 1.6	11.0 × 21.0 × 31.0	7.8	44135 44155 44165	100	
1.8 2 2.2	13.0 × 23.0 × 31.0	10.4	44185 44205 44225	100	



C ( $\mu\text{F}$ )	DIMENSIONS W x H x L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING			
			LOOSE IN BOX		REEL	
			$l_t = 4.0 + 1.0/- 0.5 \text{ mm}^{(1)}$		SPQ	SPQ
			C-tol = $\pm 5 \%$	LAST 5 DIGITS OF CATALOG NUMBER		
2.4 2.7	15.0 x 25.0 x 31.0	12.8	44245 44275	100		
3 3.3 3.6 3.9	18.0 x 28.0 x 31.0	17.2	44305 44335 44365 44395	100		

**Note**

1.  $l_t = 4.0 + 1/- 0.5 \text{ mm}$  for pitch = 10 mm and  $3.5 \pm 0.3 \text{ mm}$  for pitch = 15 mm; 22.5 mm and 27.5 mm.

**SPECIFIC REFERENCE DATA (400 VDC)**

DESCRIPTION	VALUE	
	at 10 kHz	at 100 kHz
Tangent of loss angle:		
0.022 $\mu\text{F} < C \leq 0.027 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 15 \times 10^{-4}$
0.027 $\mu\text{F} < C \leq 0.075 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 20 \times 10^{-4}$
0.075 $\mu\text{F} < C \leq 0.11 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 25 \times 10^{-4}$
0.11 $\mu\text{F} < C \leq 0.18 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 30 \times 10^{-4}$
0.18 $\mu\text{F} < C \leq 0.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 35 \times 10^{-4}$
0.3 $\mu\text{F} < C \leq 0.39 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 40 \times 10^{-4}$
0.39 $\mu\text{F} < C \leq 0.56 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 45 \times 10^{-4}$
0.56 $\mu\text{F} < C \leq 0.68 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 50 \times 10^{-4}$
0.68 $\mu\text{F} < C \leq 0.82 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 55 \times 10^{-4}$
0.82 $\mu\text{F} < C \leq 0.91 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 60 \times 10^{-4}$
0.91 $\mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 65 \times 10^{-4}$
1.0 $\mu\text{F} < C \leq 1.2 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 70 \times 10^{-4}$
1.2 $\mu\text{F} < C \leq 1.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 75 \times 10^{-4}$
1.3 $\mu\text{F} < C \leq 1.5 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 80 \times 10^{-4}$
1.5 $\mu\text{F} < C \leq 1.6 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 85 \times 10^{-4}$
1.6 $\mu\text{F} < C \leq 1.8 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 90 \times 10^{-4}$
1.8 $\mu\text{F} < C \leq 2.0 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 95 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) <sub>R</sub> :		
l = 12.5 mm	80 V/ $\mu\text{s}$	
l = 17.5 mm	70 V/ $\mu\text{s}$	
l = 26.0 mm	35 V/ $\mu\text{s}$	
l = 31.0 mm	25 V/ $\mu\text{s}$ (b < 15 mm)	
l = 31.0 mm	13 V/ $\mu\text{s}$ (b $\geq$ 15 mm)	
R between leads for C $\leq 1.0 \mu\text{F}$ at 100 V; 1 minute	> 100000 M $\Omega$	
RC between leads, for C > 1 $\mu\text{F}$ at 100 V; 1 minute	> 100000 s	
R between interconnected leads and case; 100 V; 1 minute	> 100000 M $\Omega$	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	640 V; 1 minute	
Withstanding (DC)voltage between leads and case	2840 V; 1 minute	



$U_{Rdc} = 400 \text{ V}$ ;  $U_{Rac} = 200 \text{ V}$ ;  $U_{p-p} = 560 \text{ V}$

C ( $\mu\text{F}$ )	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING		
			LOOSE IN BOX		REEL
			$l_t = 4.0 + 1.0/-0.5 \text{ mm}^{(1)}$		SPQ
			C-tol = $\pm 5 \%$	SPQ	
			LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ
<b>Pitch = <math>10.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>					
0.022	4.0 × 10.0 × 12.5	0.6	54223	1000	1400
0.024			54243		
0.027			54273		
0.03			54303		
0.033			54333		
0.036	5.0 × 11.0 × 12.5	0.85	54363	1000	1100
0.039			54393		
0.043			54433		
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>					
0.047	5.0 × 11.0 × 17.5	1.2	54473	1000	1100
0.051			54513		
0.056			54563		
0.062			54623		
0.068			54683		
0.075			54753		
0.082	54823				
0.091	6.0 × 12.0 × 17.5	1.4	54913	1000	900
0.1			54104		
0.11			54114		
0.12			54124		
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
0.13	7.0 × 13.5 × 17.5	1.9	54134	1000	800
0.15			54154		
0.16			54164		
0.18	8.5 × 15.0 × 17.5	2.6	54184	1000	650
0.2			54204		
0.22			54224		
<b>Pitch = <math>22.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
0.24	7.0 × 16.5 × 26.0	3.2	54244	200	550
0.27			54274		
0.3			54304		
0.33	8.5 × 18.0 × 26.0	4.4	54334	200	450
0.36			54364		
0.39			54394		
0.43			54434		
0.47			54474		
0.51	10.0 × 19.5 × 26.0	5.5	54514	200	350
0.56			54564		
0.62			54624		
<b>Pitch = <math>27.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>					
0.68	11.0 × 21.0 × 31.0	7.8	54684	100	
0.75			54754		
0.82			54824		





C ( $\mu\text{F}$ )	DIMENSIONS W x H x L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING		
			LOOSE IN BOX		REEL
			$l_t = 4.0 + 1.0/- 0.5 \text{ mm}^{(1)}$		SPQ
			C-tol = $\pm 5 \%$	SPQ	
			LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ
0.91 1 1.1	13.0 x 23.0 x 31.0	10.4	54914 54105 54115	100	
1.2 1.3 1.5	15.0 x 25.0 x 31.0	12.8	54125 54135 54155	100	
1.6 1.8 2	18.0 x 28.0 x 31.0	17.2	54165 54185 54205	100	

**Note**

1.  $l_t = 4.0 + 1/- 0.5 \text{ mm}$  for pitch = 10 mm and  $3.5 \pm 0.3 \text{ mm}$  for pitch = 15 mm; 22.5 mm and 27.5 mm.

**SPECIFIC REFERENCE DATA (630 VDC)**

DESCRIPTION	VALUE	
	at 10 kHz	at 100 kHz
Tangent of loss angle:		
0.01 $\mu\text{F} \leq C \leq 0.027 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 15 \times 10^{-4}$
0.027 $\mu\text{F} < C \leq 0.075 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 20 \times 10^{-4}$
0.075 $\mu\text{F} < C \leq 0.11 \mu\text{F}$	$\leq 5 \times 10^{-4}$	$\leq 25 \times 10^{-4}$
0.11 $\mu\text{F} < C \leq 0.18 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 30 \times 10^{-4}$
0.18 $\mu\text{F} < C \leq 0.3 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 35 \times 10^{-4}$
0.3 $\mu\text{F} < C \leq 0.39 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 40 \times 10^{-4}$
0.39 $\mu\text{F} < C \leq 0.56 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 45 \times 10^{-4}$
0.56 $\mu\text{F} < C \leq 0.68 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 50 \times 10^{-4}$
0.68 $\mu\text{F} < C \leq 0.82 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 55 \times 10^{-4}$
0.82 $\mu\text{F} < C \leq 1.0 \mu\text{F}$	$\leq 10 \times 10^{-4}$	$\leq 60 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) <sub>R</sub>		
l = 12.5 mm	100 V/ $\mu\text{s}$	
l = 17.5 mm	90 V/ $\mu\text{s}$	
l = 26.0 mm	45 V/ $\mu\text{s}$	
l = 31.0 mm	30 V/ $\mu\text{s}$ (b < 15 mm)	
l = 31.0 mm	15 V/ $\mu\text{s}$ (b $\geq$ 15 mm)	
R between leads for C $\leq 1.0 \mu\text{F}$ at 500 V; 1 minute	> 100000 M $\Omega$	
RC between leads, for C > 1 $\mu\text{F}$ at 100 V; 1 minute	> 100000 s	
R between interconnected leads and case; 500 V; 1 minute	> 100000 M $\Omega$	
Withstanding (DC) voltage (cut off current 10 mA); rise time 100 V/s	960 V; 1 minute	
Withstanding (DC)voltage between leads and case	2840 V; 1 minute	



$U_{Rdc} = 630 \text{ V}$ ;  $U_{Rac} = 220 \text{ V}$ ;  $U_{p-p} = 620 \text{ V}$

C ( $\mu\text{F}$ )	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING			
			LOOSE IN BOX		REEL	
			$l_t = 4.0 + 1.0/-0.5 \text{ mm}^{(2)}$		SPQ	SPQ
			C-tol = $\pm 5 \%$	last 5 digits of catalog number		
<b>Pitch = <math>10.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>						
0.01 0.011 0.012 0.013 0.015 0.016	4.0 × 10.0 × 12.5	0.6	64103 64113 64123 64133 64153 64163	1000	1400	
0.018 0.02 0.022 0.024	5.0 × 11.0 × 12.5	0.85	64183 64203 64223 64243	1000	1100	
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.60 \pm 0.06 \text{ mm}</math></b>						
0.027 0.03 0.033 0.036 0.039	5.0 × 11.0 × 17.5	1.2	64273 64303 64333 64363 64393	1000	1100	
0.043 0.047 0.051 0.056 0.062	6.0 × 12.0 × 17.5	1.4	64433 64473 64513 64563 64623	1000	900	
<b>Pitch = <math>15.0 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
0.068 0.075 0.082	7.0 × 13.5 × 17.5	1.9	64683 64753 64823	1000	800	
0.091 0.1 0.11	8.5 × 15.0 × 17.5	2.6	64913 64104 64114	1000	650	
<b>Pitch = <math>22.5 \pm 0.4 \text{ mm}</math>; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
0.12 0.13 0.15 0.16	7.0 × 16.5 × 26.0	3.2	64124 64134 64154 64164	200	550	
0.18 0.2 0.22	8.5 × 18.0 × 26.0	4.4	64184 64204 64224	200	450	



AC and Pulse Metallized Polypropylene Film Capacitors MKP Radial Potted Type


Vishay BCcomponents

C ( $\mu\text{F}$ )	DIMENSIONS W × H × L (mm)	MASS (g)	CATALOG NUMBER 2222 379 ..... AND PACKAGING			
			LOOSE IN BOX		REEL	
			$l_t = 4.0 + 1.0/-0.5 \text{ mm}^{(2)}$		SPQ	SPQ
			C-tol = $\pm 5\%$	last 5 digits of catalog number		
0.24 0.27 0.3	10.0 × 19.5 × 26.0	5.5	64244 64274 64304	200	350	
<b>Pitch = 27.5 ± 0.4 mm; <math>d_t = 0.80 \pm 0.08 \text{ mm}</math></b>						
0.33 0.36 0.39 0.43	11.0 × 21.0 × 31.0	7.8	64334 64364 64394 64434	100		
0.47 0.51 0.56	13.0 × 23.0 × 31.0	10.4	64474 64514 64564	100		
0.62 0.68 0.75	15.0 × 25.0 × 31.0	12.8	64624 64684 64754	100		
0.82 0.91 1	18.0 × 28.0 × 31.0	17.2	64824 64914 64105	100		


**Note**

- $U_{\text{Rac}} = 250 \text{ V}/U_{\text{p-p}} = 700 \text{ V}$  for  $C > 0.11 \mu\text{F}$ .
- $l_t = 4.0 + 1/-0.5 \text{ mm}$  for pitch = 10 mm and  $3.5 \pm 0.3 \text{ mm}$  for pitch = 15 mm; 22.5 mm and 27.5 mm.





**CAPACITANCE**

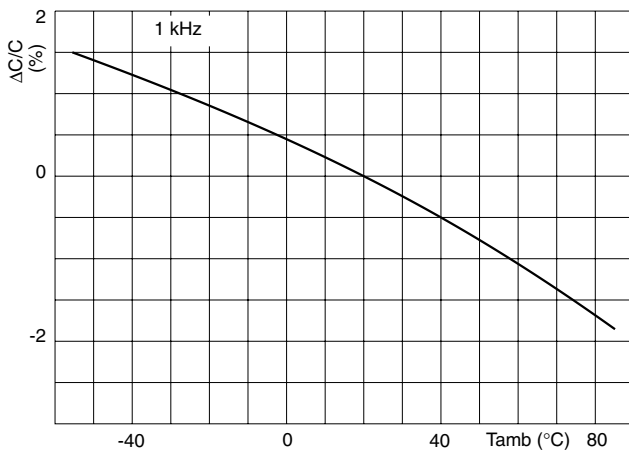

**IMPEDANCE**

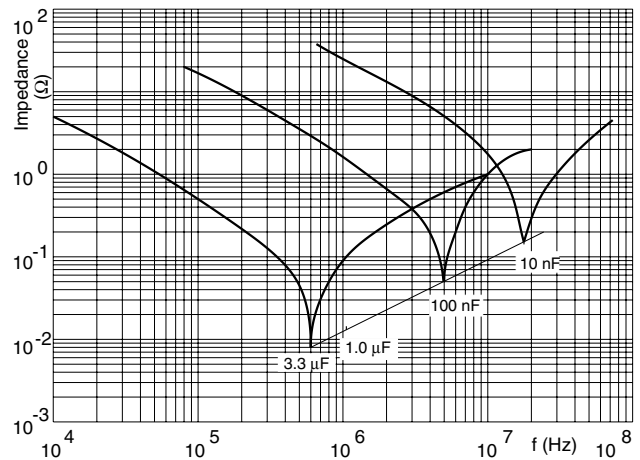

## MAXIMUM RMS VOLTAGE (SENAWE) AS A FUNCTION OF FREQUENCY

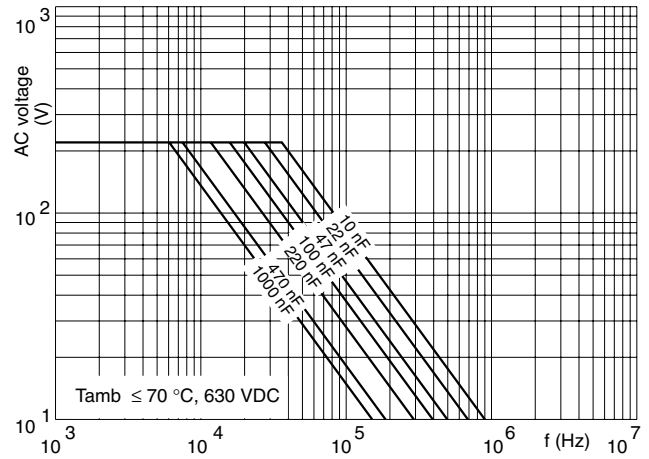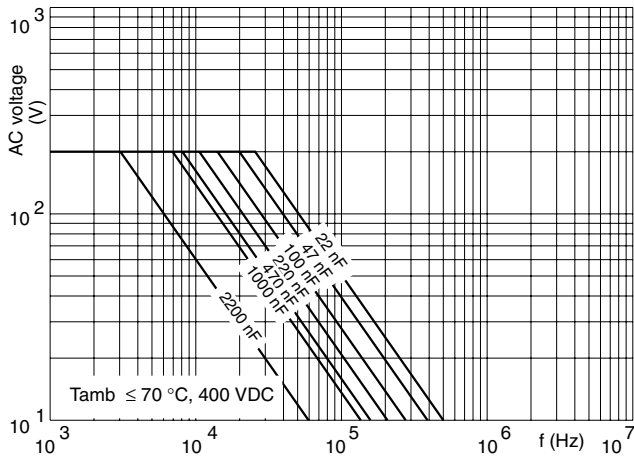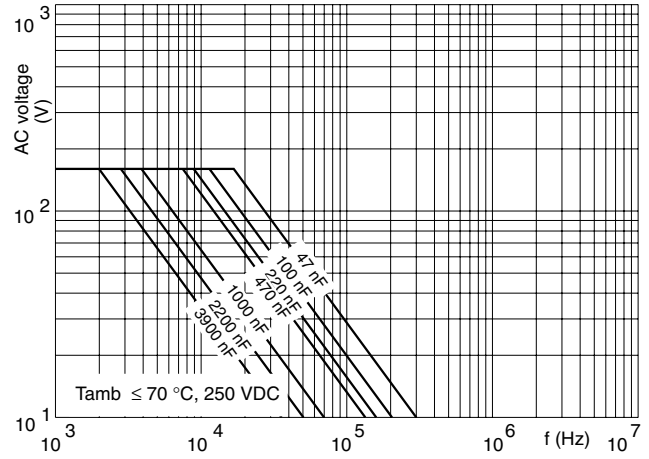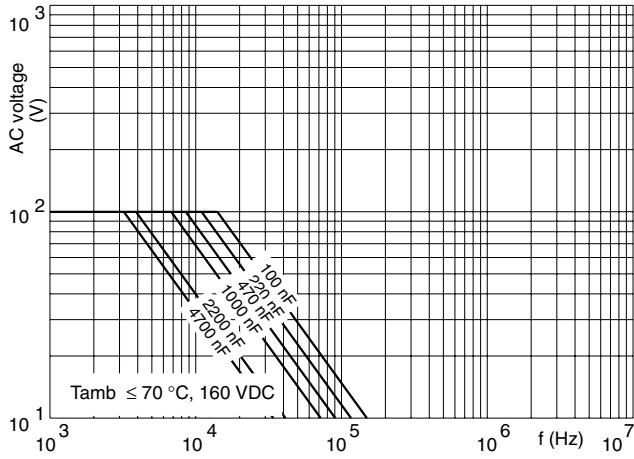



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.