



Loose

Taped



MKT Series

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

Typical applications: blocking, coupling, decoupling, by-passing, interference suppression in low voltage applications (i.e.:AUTOMOTIVE).


PRODUCT CODE: **A50**

D max	<7	≥7<16	≥16
Ød ±0.05	0.6	0.8	1

All dimensions are in mm.

PRODUCT CODE SYSTEM

The part number, comprising 14 digits, is formed as follows:



- Digit 1 to 3 Series code.
- Digit 4 d.c. rated voltage:
C = 50V D = 63V E = 100V I = 250V
M = 400V P = 630V Q = 1000V
- Digit 5 Length (mm):
F=11; H=14; K=20.5; Q=28; T=33
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and/or packaging (table1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use
- Digit 14 Capacitance tolerance:
J=5%; K=10%; M=20%.

Table 1 (for more detailed information, please refer to page 14).

Standard packaging style	Ordering code (Digit 10 to 11)
Reel Ø 355 mm	26
Loose	AA

Rated Cap.	50Vdc/30Vac		Max dv/dt (V/µs)	Max K ₀ (V ² /µs)	Part Number
	Dmax	Lmax			
0.47 µF	5.0	11.0	4.0	0.40 E3	A50CF 3470--0--
0.68 µF	5.0	11.0	4.0	0.40 E3	A50CF 3680--0--
1.0 µF	6.5	11.0	4.0	0.40 E3	A50CF 4100--0--
1.5 µF	7.0	14.0	4.0	0.40 E3	A50CH4150--0--
2.2 µF	8.0	14.0	4.0	0.40 E3	A50CH4220--0--
3.3 µF	7.5	20.5	2.0	0.20 E3	A50CK4330--0--
4.7 µF	8.5	20.5	2.0	0.20 E3	A50CK4470--0--
6.8 µF	10.0	20.5	2.0	0.20 E3	A50CK4680--0--
10.0 µF	12.0	20.5	2.0	0.20 E3	A50CK 5100--0--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____


All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.
The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

GENERAL TECHNICAL DATA

- Dielectric:** polyester film (polyethylene terephthalate).
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire.
- Protection:** polyester tape wrapping and thermosetting resin end fill.
- Marking:** Manufacturer's logo, series (1.50), dielectric code (MKT), capacitance, tolerance, D.C. rated voltage.
- Climatic category:** 55/105/56 IEC 60068-1
- Operating temperature range:** -55 to +105°C
- Related documents:** IEC 60384-2

Winding scheme

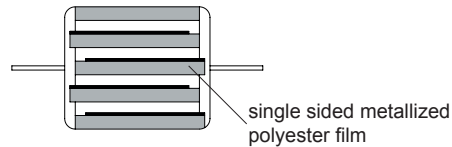

Rated Cap.	63Vdc/40Vac		Max dv/dt (V/µs)	Max K ₀ (V ² /µs)	Part Number
	Dmax	Lmax			
0.33 µF	5.0	11.0	4.0	0.50 E3	A50DF 3330--6--
0.47 µF	6.0	14.0	4.0	0.50 E3	A50DH 3470--6--
0.68 µF	6.0	14.0	4.0	0.50 E3	A50DH 3680--6--
1.0 µF	7.0	14.0	4.0	0.50 E3	A50DH 4100--6--
1.5 µF	6.5	20.5	2.0	0.25 E3	A50DK 4150--6--
2.2 µF	8.0	20.5	2.0	0.25 E3	A50DK 4220--6--
3.3 µF	9.5	20.5	2.0	0.25 E3	A50DK 4330--6--
4.7 µF	9.5	28.0	1.5	0.19 E3	A50DQ 4470--6--
6.8 µF	11.0	28.0	1.5	0.19 E3	A50DQ 4680--6--
10.0 µF	11.5	33.0	1.0	0.13 E3	A50DT 5100--6--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: A50

Rated Cap.	100Vdc/63Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D _{max}	L _{max}			
0.10 μF	5.0	11.0	5.0	1.0 E3	A50EF 3100--6--
0.15 μF	5.0	11.0	5.0	1.0 E3	A50EF 3150--6--
0.22 μF	5.0	11.0	5.0	1.0 E3	A50EF 3220--6--
0.33 μF	6.0	14.0	5.0	1.0 E3	A50EH 3330--6--
0.47 μF	6.0	14.0	5.0	1.0 E3	A50EH 3470--6--
0.68 μF	7.0	14.0	5.0	1.0 E3	A50EH 3680--6--
1.0 μF	7.0	20.5	3.0	0.6 E3	A50EK 4100--6--
1.5 μF	8.0	20.5	3.0	0.6 E3	A50EK 4150--6--
2.2 μF	9.5	20.5	3.0	0.6 E3	A50EK 4220--6--
3.3 μF	9.5	28.0	2.0	0.4 E3	A50EQ 4330--6--
4.7 μF	10.0	33.0	1.0	0.3 E3	A50ET 4470--6--
6.8 μF	12.0	33.0	1.0	0.3 E3	A50ET 4680--6--
10.0 μF	14.5	33.0	1.0	0.3 E3	A50ET 5100--6--

Rated Cap.	250Vdc/160Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D _{max}	L _{max}			
0.047 μF	5.0	11.0	10.0	5.0 E3	A50IF 2470--6--
0.068 μF	5.0	11.0	10.0	5.0 E3	A50IF 2680--6--
0.10 μF	5.5	14.0	10.0	5.0 E3	A50IH 3100--6--
0.15 μF	5.5	14.0	10.0	5.0 E3	A50IH 3150--6--
0.22 μF	6.5	14.0	10.0	5.0 E3	A50IH 3220--6--
0.33 μF	6.0	20.5	7.0	3.5 E3	A50IK 3330--6--
0.47 μF	7.0	20.5	7.0	3.5 E3	A50IK 3470--6--
0.68 μF	8.5	20.5	7.0	3.5 E3	A50IK 3680--6--
1.0 μF	8.5	28.0	4.0	2.0 E3	A50IQ 4100--6--
1.5 μF	10.0	28.0	4.0	2.0 E3	A50IQ 4150--6--
2.2 μF	11.0	33.0	2.5	1.3 E3	A50IT 4220--6--
3.3 μF	13.0	33.0	2.5	1.3 E3	A50IT 4330--6--
4.7 μF	15.5	33.0	2.5	1.3 E3	A50IT 4470--6--
6.8 μF	18.5	33.0	2.5	1.3 E3	A50IT 4680--6--
10.0 μF	22.0	33.0	2.5	1.3 E3	A50IT 5100--6--

Rated Cap.	400Vdc/200Vac		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D _{max}	L _{max}			
0.010 μF	5.0	11.0	13.5	11.0 E3	A50MF 2100--6--
0.015 μF	5.0	11.0	13.5	11.0 E3	A50MF 2150--6--
0.022 μF	5.0	11.0	13.5	11.0 E3	A50MF 2220--6--
0.033 μF	5.0	11.0	13.5	11.0 E3	A50MF 2330--6--
0.047 μF	6.0	14.0	13.5	11.0 E3	A50MH 2470--6--
0.068 μF	6.0	14.0	13.5	11.0 E3	A50MH 2680--6--
0.10 μF	6.5	14.0	13.5	11.0 E3	A50MH 3100--6--
0.15 μF	6.0	20.5	10.0	8.0 E3	A50MK 3150--6--
0.22 μF	7.5	20.5	10.0	8.0 E3	A50MK 3220--6--
0.33 μF	8.5	20.5	10.0	8.0 E3	A50MK 3330--6--
0.47 μF	8.5	28.0	6.5	5.2 E3	A50MQ 3470--6--
0.68 μF	10.0	28.0	6.5	5.2 E3	A50MQ 3680--6--
1.0 μF	10.5	33.0	4.0	3.2 E3	A50MT 4100--6--
1.5 μF	12.5	33.0	4.0	3.2 E3	A50MT 4150--6--
2.2 μF	15.0	33.0	4.0	3.2 E3	A50MT 4220--6--
3.3 μF	18.5	33.0	4.0	3.2 E3	A50MT 4330--6--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V_R), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V_R/V.

The pulse characteristic K₀ depends on the voltage wave-form and in any case it cannot overcome the value given in the above table.

*Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

Rated Cap.	630Vdc/220Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D _{max}	L _{max}			
1000 pF	5.0	11.0	20	25.0 E3	A50PF 1100--6--
1500 pF	5.0	11.0	20	25.0 E3	A50PF 1150--6--
2200 pF	5.0	11.0	20	25.0 E3	A50PF 1220--6--
3300 pF	5.0	11.0	20	25.0 E3	A50PF 1330--6--
4700 pF	5.0	11.0	20	25.0 E3	A50PF 1470--6--
6800 pF	5.0	11.0	20	25.0 E3	A50PF 1680--6--
0.010 μF	5.0	14.0	20	25.0 E3	A50PH 2100--6--
0.015 μF	5.0	14.0	20	25.0 E3	A50PH 2150--6--
0.022 μF	6.0	14.0	20	25.0 E3	A50PH 2220--6--
0.033 μF	6.0	20.5	15	19.0 E3	A50PK 2330--6--
0.047 μF	6.0	20.5	15	19.0 E3	A50PK 2470--6--
0.068 μF	7.0	20.5	15	19.0 E3	A50PK 2680--6--
0.10 μF	7.0	28.0	10	13.0 E3	A50PQ 3100--6--
0.15 μF	8.5	28.0	10	13.0 E3	A50PQ 3150--6--
0.22 μF	10.0	28.0	10	13.0 E3	A50PQ 3220--6--
0.33 μF	10.5	33.0	6	7.5 E3	A50PT 3330--6--
0.47 μF	12.0	33.0	6	7.5 E3	A50PT 3470--6--
0.68 μF	14.5	33.0	6	7.5 E3	A50PT 3680--6--
1.0 μF	17.5	33.0	6	7.5 E3	A50PT 4100--6--

Rated Cap.	1000Vdc/250Vac*		Max dv/dt (V/μs)	Max K ₀ (V ² /μs)	Part Number
	D _{max}	L _{max}			
1000 pF	6.5	14.0	50	100 E3	A50QH 1100--0--
1500 pF	6.5	14.0	50	100 E3	A50QH 1150--0--
2200 pF	6.5	14.0	50	100 E3	A50QH 1220--0--
3300 pF	6.5	14.0	50	100 E3	A50QH 1330--0--
4700 pF	7.5	14.0	50	100 E3	A50QH 1470--0--
6800 pF	8.0	14.0	50	100 E3	A50QH 1680--0--
0.010 μF	7.0	20.5	30	60 E3	A50QK 2100--0--
0.015 μF	7.5	20.5	30	60 E3	A50QK 2150--0--
0.022 μF	9.0	20.5	30	60 E3	A50QK 2220--0--
0.033 μF	8.0	28.0	15	30 E3	A50QQ 2330--0--
0.047 μF	9.0	28.0	15	30 E3	A50QQ 2470--0--
0.068 μF	10.5	28.0	15	30 E3	A50QQ 2680--0--
0.10 μF	12.5	28.0	15	30 E3	A50QQ 3100--0--
0.15 μF	13.5	33.0	10	20 E3	A50QT 3150--0--
0.22 μF	16.0	33.0	10	20 E3	A50QT 3220--0--
0.33 μF	19.0	33.0	10	20 E3	A50QT 3330--0--
0.47 μF	22.0	33.0	10	20 E3	A50QT 3470--0--

Mechanical version and packaging (Table1) _____
Internal use _____
Tolerance: J (±5%); K (±10%); M (±20%) _____

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: **A50**

ELECTRICAL CHARACTERISTICS

Rated voltage (V_R):

50 Vdc 63 Vdc 100 Vdc 250 Vdc
400 Vdc 630 Vdc 1000 Vdc

Rated temperature (T_R): +85 °C

Temperature derated voltage:

for temperatures between +85°C and +105°C a decreasing factor of 1.25% per degree °C on the rated voltage V_R (d.c. and a.c.) has to be applied.

Capacitance range: 1000pF to 10 μ F

Capacitance values: E6 series (IEC 60063 Norm).

Capacitance tolerances (measured at 1 kHz):
±5% (J); ±10% (K); ±20% (M).

Total self-inductance (L): \approx 7nH
max 1 nH per 1 mm lead and capacitor length.

Dissipation factor (DF):

tg δ 10⁻⁴ at +25°C ±5°C

kHz	C ≤ 0.1 μ F	0.1 μ F < C ≤ 1 μ F	C > 1 μ F
1	≤ 80	≤ 80	≤ 100
10	≤ 150	≤ 150	
100	≤ 250		

Insulation resistance:

Test conditions

Temperature: +25°C ±5°C
Voltage charge time: 1 min
Voltage charge:
50 Vdc for $V_R < 100$ Vdc
100 Vdc for $V_R \geq 100$ Vdc

Performance

For $V_R \leq 100$ Vdc
≥ 3750 M Ω for C ≤ 0.33 μ F (50000 M Ω)*
≥ 1000 s for C > 0.33 μ F (5000 s)*

For $V_R > 100$ Vdc
≥ 30000 M Ω for C ≤ 0.33 μ F (50000 M Ω)*
≥ 10000 s for C > 0.33 μ F (17000 s)*

*Typical value

Test voltage between terminations:

1.6x V_R applied for 2 s at +25°C ±5°C.

TEST METHOD AND PERFORMANCE

Damp heat, steady state:

Test conditions

Temperature: +40°C ±2°C
Relative humidity (RH): 93% ±2%
Test duration: 56 days

Performance

Capacitance change $|\Delta C/C|$: ≤ 5%
DF change (Δ tg δ): ≤ 50x10⁻⁴ at 1kHz
Insulation resistance: ≥ 50% of initial limit.

Endurance:

Test conditions

Temperature: +85°C ±2°C
Test duration: 2000 h
Voltage applied: 1.25x V_R

Performance

Capacitance change $|\Delta C/C|$: ≤ 5%
DF change (Δ tg δ): ≤ 30x10⁻⁴ at 10kHz for C ≤ 1 μ F
≤ 20x10⁻⁴ at 1kHz for C > 1 μ F
Insulation resistance: ≥ 50% of initial limit.

Resistance to soldering heat:

Test conditions

Solder bath temperature: +260°C ±5°C
Dipping time (with heat screen): 10 s ±1 s

Performance

Capacitance change $|\Delta C/C|$: ≤ 2%
DF change (Δ tg δ): ≤ 30x10⁻⁴ at 10kHz for C ≤ 1 μ F
≤ 20x10⁻⁴ at 1kHz for C > 1 μ F
Insulation resistance: ≥ initial limit.

Long term stability (after two years):

Storage: standard environmental conditions (see page 12).

Performance

Capacitance change $|\Delta C/C|$: ≤ 3% for C ≤ 0.1 μ F
≤ 2% for C > 0.1 μ F

RELIABILITY:

Reference MIL HDB 217

Application conditions:

Temperature: +40°C ±2°C
Voltage: 0.5x V_R
Failure rate: ≤ 5 FIT
(1 FIT = 1x10⁻⁹ failures/components x h)

Failure criteria:


(according to DIN 44122)
Short or open circuit
Capacitance change $|\Delta C/C|$: > 10%
DF change (Δ tg δ): > 2 x initial limit.
Insulation resistance: < 0.005 x initial limit.

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**


PRODUCT CODE: A50

MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / $T_h \leq 40^\circ\text{C}$)


50 Vdc / 30 Vac

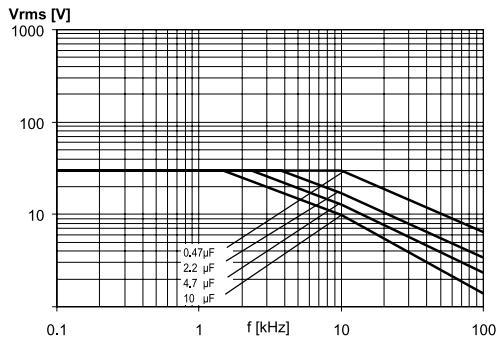


63 Vdc / 40 Vac

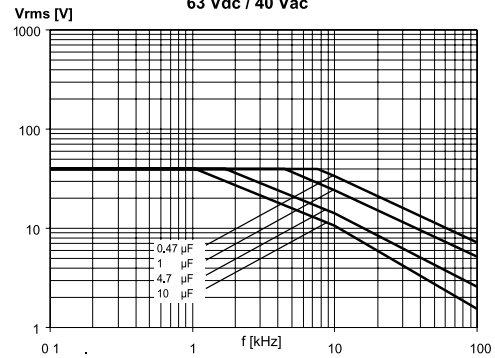


100 Vdc / 63 Vac

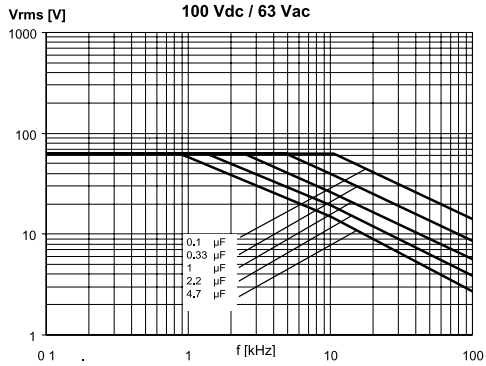


250 Vdc / 160 Vac

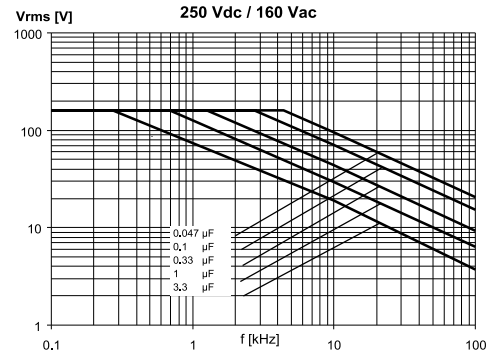


400 Vdc / 200 Vac

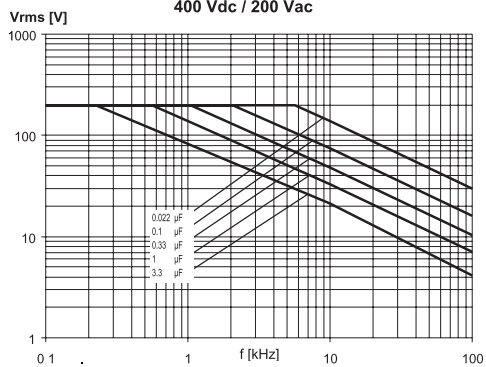

630 Vdc / 220 Vac

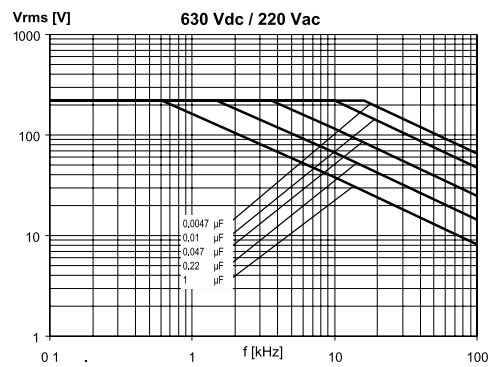

1000 Vdc / 250 Vac

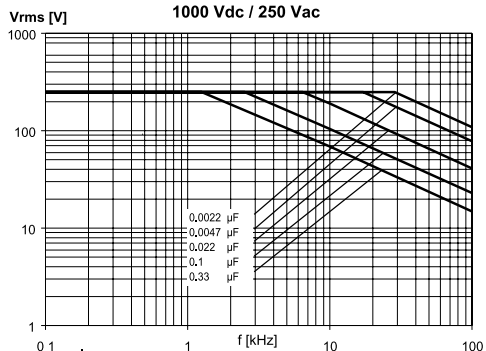

**METALLIZED POLYESTER FILM CAPACITOR
D.C. MULTIPURPOSE APPLICATIONS**

PRODUCT CODE: A50

MAX. CURRENT (I_{r.m.s.}) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)

