


MATERIAL NO.	ENGINEERING NO.	DIM "A" INCH	DIM "A" (mm)
834219207	83421-9207	18.00 +.50 / -0.0	457.2 +12.7 / -0.0
834219208	83421-9208	36.00 +.50 / -0.0	914.4 +12.7 / -0.0
834219209	83421-9209	72.00 +.50 / -0.0	1828.8 +12.7 / -0.0

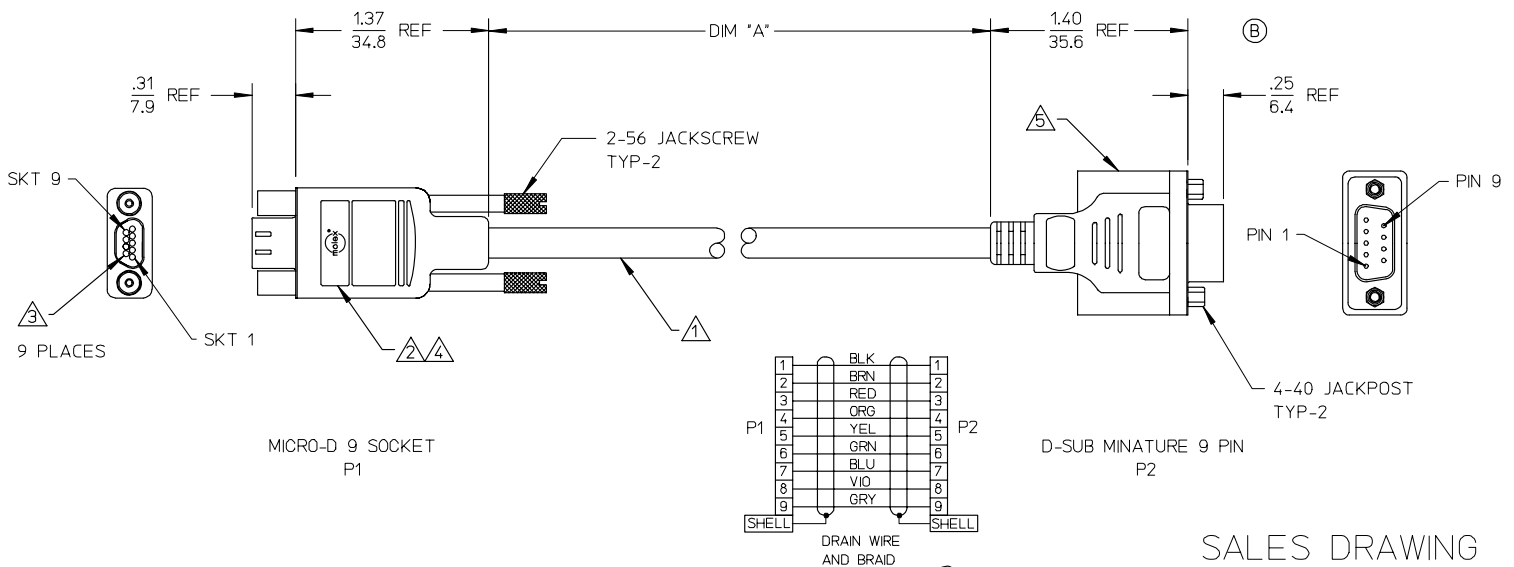

SALES DRAWING

NOTES: UNLESS OTHERWISE SPECIFIED

- CABLE: UL 2464 28 AWG, 9 CONDUCTOR, TINNED COPPER, 7 STRAND. WIRE INSULATION: PVC SHIELD; AL-FOIL / MYLAR, INCLUDING DRAIN WIRE & BRAID. OUTER CABLE JACKET: BLACK PVC.
- MOLEX COMMERCIAL MICRO-D # 83421-9014.
- MOLEX TERMINAL SOCKET # 83000-9503, (2,500 PC REEL), TYP-16 PLACES.
- REFER TO PS-83421-9000 FOR PRODUCT SPEC.
- D-SUB, 9 PIN MALE CONNECTOR (SOLDER TYPE) WITH OVERMOLDED INSULATOR.
- ALL COMPONENTS ARE RoHS COMPLIANT.

REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH	IN/MM	---	INCH	☉
1	REDRAWN	▽=0	4 PLACES ±---	±---	TODD B	9-12-06	9 SKT COMM MICRO-D TO 9 PIN D-SUB W/JACKPOST CABLE ASSEMBLY	
2	EC NO: ETC2007-0118	▽=0	3 PLACES ±---	±---	CHECKED BY	DATE	MOLEX INCORPORATED	
3	DRAWN: IRONMANNO 2006/09/29		2 PLACES ±---	±---	J. MACNEIL	9-12-06	SD-83421-015	
4	CHKD: J. MACNEIL 2006/10/13		1 PLACE ±---	±---	APPROVED BY	DATE	1 OF 1	
5	APPR: J. MACNEIL 2006/10/13		ANGULAR ±---	±---	J. MACNEIL	9-12-06	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	