

SIZE	Part Num.	Threading	Packaging
25	8655MH2501BLF	UNC 4.40	BULK (see note 1)
	8655MH2501BKLF	UNC 4.40	KIT (see note 2)
	8655MH2502BLF	M3	BULK
	8655MH2502BKLF	M3	KIT

NOTES:

Material and finish: Zinc die-cast
Nickel plated




Cable strain relief: Steel fibre reinforced
Polycarbonate (UL94V-0)
for EMI/RFI screening

Jackscrew: black, threading according table
Temperature range: -40°C to 120°C
Cable diameter: 4,0 to 12,0mm
Attenuation factor: >40 dB between 30MHz and 1 GHz
Marking FCI logo: Height 6 mm for all versions

Covers screwing force (max): 100 Ncm
Jackscrew screwing force (max): 75 Ncm

Packaging notes (see tables):

- 1 - Bulk : Every spare part packaged per 100 or 200 into plastic bag, 4 plastic bags per carton box, 1 plastic bag per part.
- 2 - Kit : 1 set of spare parts necessary to realise 1 kit into a plastic bag, 100 plastic bags per carton box.

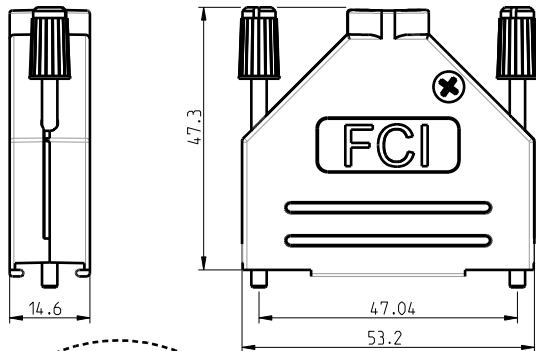

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREW	2			2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREW POZIDRIVE	5			2	

rev	ecr no	dr	date
1	-	LGO	2008/01/31
2	-	LGO	2008/02/06
A	LS08-0054	LGO	2008/04/08
B	F09-0048	LSA	2009/05/20
C	F10-0093	APA	2010/08/31
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	GOISNARD, L	2008/01/31	ANGULAR	0.x	±/
Eng	PESSON, M	2008/01/31	LINEAR	0.xx	±/
Chr	LEGARE, P	2008/01/31	0° ±"	0.xxx	±/
Appr	LEGARE, P	2008/01/31	Product family	size	A3
				ECN	F10-0093
				Spec ref	
FCI D-SUB METAL HOODS				o	10085962C
STRAIGHT				o	
catalog no				Rev.	C
				sheet	1 of 3

Copyright FCI.





PDM: Rev:C

STATUS Released



Printed: Oct 01, 2010

SIZE	Part Num.	Threading	Packaging
09	8655MH0901BLF	UNC 4.40	BULK (see note 1)
	8655MH0901BKLF	UNC 4.40	KIT (see note 2)
	8655MH0902BLF	M3	BULK
	8655MH0902BKLF	M3	KIT

SIZE	Part Num.	Threading	Packaging
15	8655MH1501BLF	UNC 4.40	BULK (see note 1)
	8655MH1501BKLF	UNC 4.40	KIT (see note 2)
	8655MH1502BLF	M3	BULK
	8655MH1502BKLF	M3	KIT

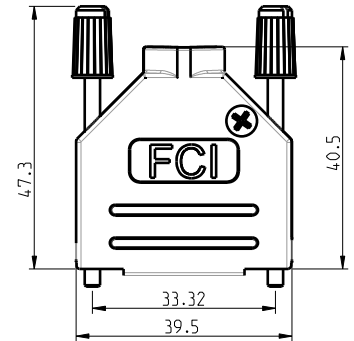

SIZE	Part Num.	Threading	Packaging
37	8655MH3701BLF	UNC 4.40	BULK (see note 1)
	8655MH3701BKLF	UNC 4.40	KIT (see note 2)
	8655MH3702BLF	M3	BULK
	8655MH3702BKLF	M3	KIT

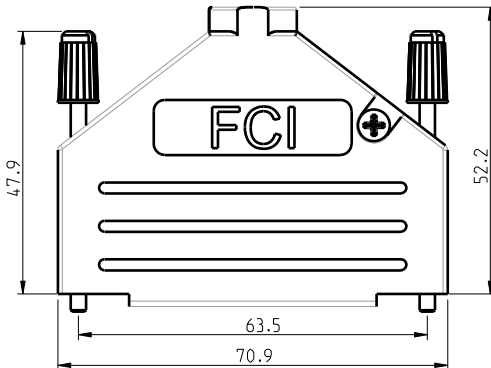

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED				size	A3
Dr	GOISNARD, L	2008/01/31	ANGULAR	LINEAR	0.x ±/	Scale	3:2
Eng	PESSON, M	2008/01/31	0° ±/	0.xxx ±/	ECN	F10-0093	
Chr	LEGARE, P	2008/01/31	Product family		Spec ref		
Appr	LEGARE, P	2008/01/31			dwg no	10085962C	
FCI		D-SUB METAL HOODS				Rev.	C
STRAIGHT		catalog no				sheet 2 of 3	

Copyright FCI.


PDM: Rev:C

STATUS: Released


Printed: Oct 01, 2010

CABLING INSTRUCTIONS FOR CABLE \varnothing 4, 5, 7 or 9 mm


1- Use two halves of strain relief, different sizes can be mixed (\varnothing 4,5,7 or 9)

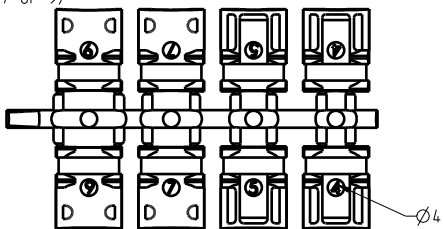


2- Strip cable 18mm and shape to two pigtails

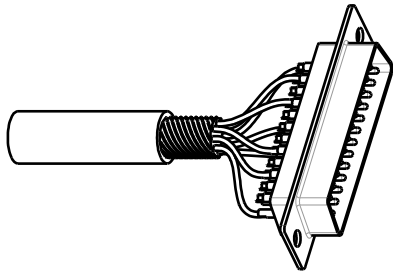


3- Attach the strain relief around the cable

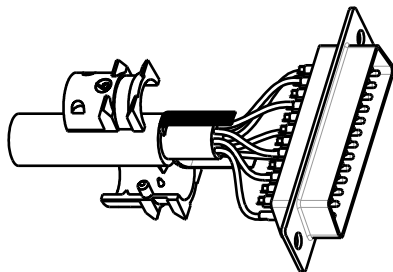


4- Bend cable shielding back on outside of strain relief

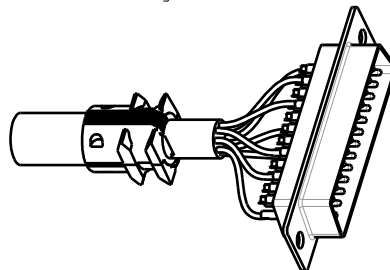

5- Mount connector and cable into the backshell

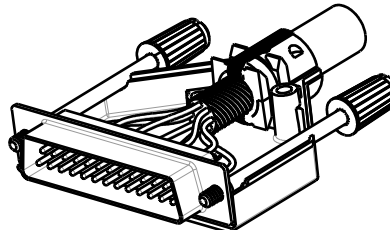

6- Assemble the other half screwing force: 100 Ncm

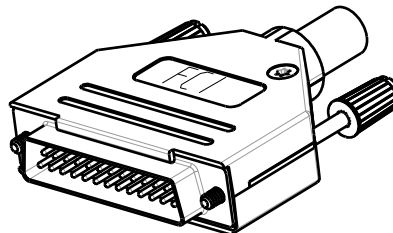

CABLING INSTRUCTIONS FOR CABLE \varnothing > 9 to 11 mm

1- Use one half of strain relief, (\varnothing 9).

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	GOISNARD, L	2008/01/31	ANGULAR	0, x	±/
Eng	PESSON, M	2008/01/31	LINEAR	0, xx	±/
Chr	LEGARE, P	2008/01/31	0° ±"	0, xxx	±/
Appr	LEGARE, P	2008/01/31	Product family	ECN	F10-0093
				Spec ref	
FCI		D-SUB METAL HOODS		dwg no	10085962C
STRAIGHT		catalog no		Rev.	C
				sheet	3 of 3

PDM: Rev:C

STATUS Released

Printed: Oct 01, 2010