
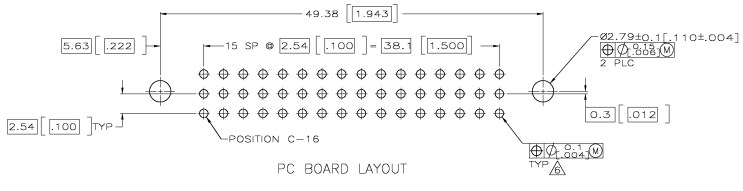


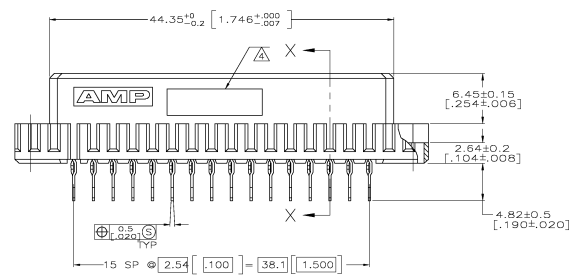


| REV | DATE | DESCRIPTION                  | BY | CHK | APP |
|-----|------|------------------------------|----|-----|-----|
| AD  | 25   | RELEASED PER EC DS12-0082-05 |    |     |     |

△ HOUSING MATERIAL: GLASS-FILLED POLYMER, COLOR: GRAY.  
 △ CONTACT MATERIAL: COPPER ALLOY.  
 △ CONTACT FINISH: DIN 41612 CLASS 2 IN CONTACT AREA.  
 △ TIN ON POSTS.  
 △ PART NUMBER, DATE CODE IDENTIFICATION, CSA LOGO IN THIS APPROXIMATE AREA.  
 △ POINT OF MEASUREMENT FOR DIN 41612 CLASS 2 FINISH.  
 △ ACTION PIN POSTS REQUIRE 1.57[.062] MIN THICK PC BOARD.  
 △ RECOMMEND PC BOARD HOLES ARE 2.15[.085] (.043[.001] DRILLED HOLE WITH 0.02-0.07[.001-.003] COPPER AND 0.008[.0003] MIN TIN-LEAD PLATING. FINISHED HOLE AFTER PLATING: 2.034-1.03[.037-.043].

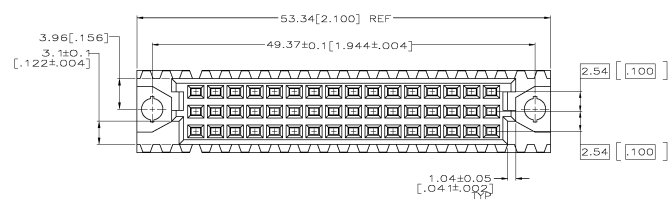

| THRU      | POSITIONS | LOADED | POSITION | ASSY PART NUMBER |
|-----------|-----------|--------|----------|------------------|
| 1 THRU 16 | X X X     | X      | 48       | 5535034-5        |
| 1 THRU 16 | X X X     | X      | 48       | 5535034-4        |

| THIS DRAWING IS A CONTROLLED DOCUMENT. |        | REV  | DATE | DESCRIPTION | BY | CHK | APP |
|--|--------|--|------|-------------|----|-----|-----|
| DATE                                   | ISSUED | REV <td>DATE</td> <td>DESCRIPTION</td> <td>BY</td> <td>CHK</td> <td>APP</td> | DATE | DESCRIPTION | BY | CHK | APP |
| DATE                                   | ISSUED | REV <td>DATE</td> <td>DESCRIPTION</td> <td>BY</td> <td>CHK</td> <td>APP</td> | DATE | DESCRIPTION | BY | CHK | APP |

| DATE | ISSUED | REV | DATE | DESCRIPTION | BY | CHK | APP |
|------|--------|-----|------|-------------|----|-----|-----|
| DATE | ISSUED | REV | DATE | DESCRIPTION | BY | CHK | APP |