




**DIMENSIONS** mm (inches)

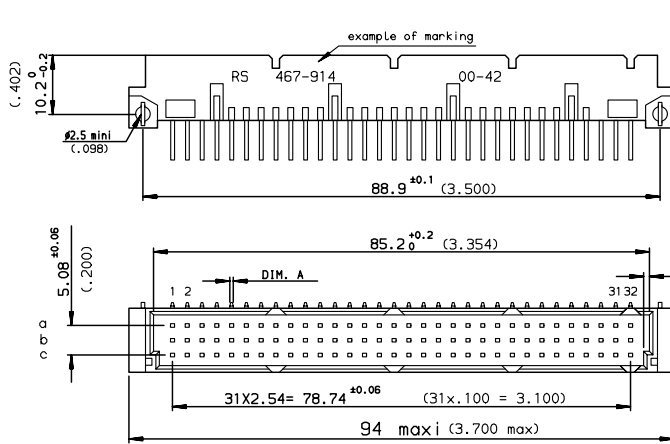

**PCB DRILLING**

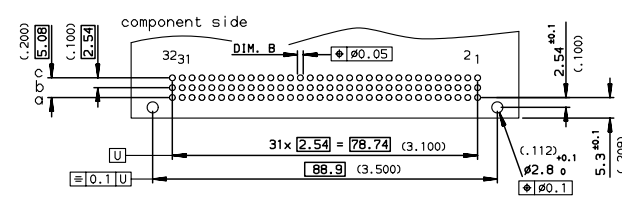

PART NUMBER		8609		71		5	
PIN OUT	rows a-b-c	3	96				
	rows a-c	4	64				
NUMBER OF CONTACTS							
TERMINATION		L = 2.75 ±0.15 (.108)		A = $\varnothing 0.6^{+0.08}$		B = $\varnothing 0.8^{+0.3}$ 13	
OPTIONS							
no option							7
with harpoons							H
PERFORMANCE CLASS							
DIN 41612 class 3							4
DIN 41612 class 2							
DIN 41612 class 1							
TERMINATION TYPE							
TIN LEAD							-485E1
LEAD FREE							-ATLF

**SPECIFICATION 485 or ATLF**

specific marking : customer part number + date code

GENERAL CHARACTERISTICS and ROHS INFORMATIONS  
SEE DRAWING C-8609-0000A

**European Views**

rev	ecn no	dr	date
A	-	ROU	2000/11/20
B	LS07-0130	HLE	2007/06/04
C	LS07-0211	HLE	2007/08/09
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	ROUILLARD	2000/11/20	ANGULAR	0.X	±0.1	size	A3
Eng	ROUILLARD	2000/11/20	LINEAR	0.XX	±0.1	Scale	1.5
Chr	LEGARE	2000/11/20	0.XX' ±2'	0.XXX	±0.1	ECN	LS07-0211
Appr	LEGARE	2000/11/20	Product family	DIN		Spec ref	-
<b>FCI</b>		TITLE			RIGHT ANGLE MALE STYLE C		Rev.
catalog no		SEE TABLE			C-8609-0849		C
					CUSTOMER		sheet 1 of 1