



BS.C .202468.018.00

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90	REV.	DATE	DESCRIPTION	BY	C'K'D'																
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	76	81	83	84	88						

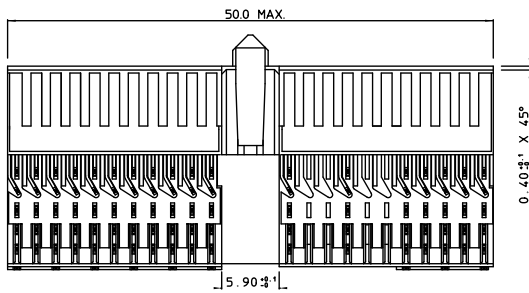


PERFORMANCE CHARACTERISTICS

CURRENT RATING : 1,5 A AT 20°C ( FULLY LOADED )  
 RATED VOLTAGE : 500 V AC ( CONT / CONT )  
 OPERATING TEMPERATURE : -55°C TO 125°C  
 CONTACT RESISTANCE : 20 mΩ MAX  
 INSERTION FORCE : 0,75 N MAX / CONT  
 EXTRACTION FORCE : 0,15 N MIN / CONT  
 INSULATION RESISTANCE : 10<sup>9</sup> MΩ MIN

NOTES

1. "-" PERFORMANCE LEVEL INDICATION: Z1- PL3 (SEE CAT. NR.) N9- PL2 E9- PL1
2. CSA CERTIFIED, FILE NUMBER LR 44961-51. UL APPROVED, FILE NUMBER E31151.

- EMPTY CAVITY
- CAVITY LOADED WITH CONTACT



THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY. USE ONLY FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF AN ISSUE.  
 DIT IS HIER EIGENDOM VAN DE NEDERLANDSE HOEKLEN. OVERNAME EN AANGEVEN. NIET VOOR ANDERZIJN BEWELDT WORDEN. ZONDER HIER SCHRIJFTELIJKE TOELATING, NIET NIET VERBODEN IN TOEGANGSNIJN WERKTOEL.

FEMALE SIGNAL RIGHT ANGLE PRESS-FIT-TO-BOARD CONNECTOR WITH SERVICECENTER

1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN	APPR. DATE SIGN. MILLIPACS 2 LOADING PATTERN DRAFT 16-09-99 M.Fret CHECKED	CAT. No. HM2R10PACA39--	SCALE 3/1
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR. PR. ENG. MGR. PR. MGT. MGR.	FRAMATONE CONNECTORS BELGIUM N.V. A SPINDYSTRAT 8, 2800 NEELEN	
ALL DIMENSIONS IN MM ALLE AFMETINGEN IN MM	REFERENCES/REFERENTIES	BS.C .202468.018.00 DRAWING No. CUSTOMER DRAWING	