


NOTES:

- 1-Material:phosphor bronze,thickness 0.20
- 2-Finish on contact area:see table  
finish on termination:bright tin over nickel
- 3-Wire range:20 to 24 AWG
- 4-Max outer dia of wire insulator:1.73 mm
- 5-Current carrying capacity per contact:  
5.Amps max when crimped to #20 AWG  
5 Amps max when crimped to #22 AWG  
3 Amps max when crimped to #24 AWG
- 6-After 5 insertions into connector,  
contact retention must be 5 pounds axial load min
- 7-When contact is crimped to 20 AWG,the insulation  
support crimped height must be 1.78 mm max to ensure  
a proper insertion into housing
- 6-Packaging:Box of 500 contacts

NOTE:ROHS INFORMATIONS  
The LF products meet European union directives and other  
country regulations as described in GS-22-008  
Terminations plating spec:2µm Nickel min + 2µm Sn min  
Packaging spec: see GS-14-920

CORE RANGE	
<b>8656353064LF</b>	Flash Au
<b>8656353064</b>	Flash Au
PART NUMBER	Plating

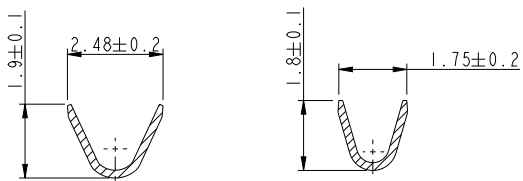

SECTION A-A SECTION B-B

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm																																
		TOLERANCES UNLESS OTHERWISE SPECIFIED																																		
Dr	C JARRY	28/01/97	ANGULAR	size A3																																
Eng			LINEAR	Scale 10:1																																
Chr			0° ± 2°	ECN 110-0070																																
Appr			Product family	Spec ref																																
<table border="1"> <thead> <tr> <th>rev</th> <th>ecn no</th> <th>dr</th> <th>date</th> </tr> </thead> <tbody> <tr> <td>E</td> <td>LS06-196</td> <td>MPE</td> <td>27/11/2006</td> </tr> <tr> <td>F</td> <td>LS08-0127</td> <td>MPE</td> <td>13/05/2008</td> </tr> <tr> <td>G</td> <td>109-0152</td> <td>AMR</td> <td>2009-07-27</td> </tr> <tr> <td>H</td> <td>110-0070</td> <td>AMR</td> <td>2010-03-09</td> </tr> </tbody> </table>			rev	ecn no	dr	date	E	LS06-196	MPE	27/11/2006	F	LS08-0127	MPE	13/05/2008	G	109-0152	AMR	2009-07-27	H	110-0070	AMR	2010-03-09	<table border="1"> <tr> <td>title</td> <td>CRIMP SOCKET</td> <td>Rev.</td> <td>H</td> </tr> <tr> <td>#WIRE</td> <td>20-24 in box 500 cts</td> <td>AWG no</td> <td>C01-8656-0512</td> </tr> <tr> <td>catalog no</td> <td></td> <td>customer</td> <td>sheet 1 of 1</td> </tr> </table>		title	CRIMP SOCKET	Rev.	H	#WIRE	20-24 in box 500 cts	AWG no	C01-8656-0512	catalog no		customer	sheet 1 of 1
rev	ecn no	dr	date																																	
E	LS06-196	MPE	27/11/2006																																	
F	LS08-0127	MPE	13/05/2008																																	
G	109-0152	AMR	2009-07-27																																	
H	110-0070	AMR	2010-03-09																																	
title	CRIMP SOCKET	Rev.	H																																	
#WIRE	20-24 in box 500 cts	AWG no	C01-8656-0512																																	
catalog no		customer	sheet 1 of 1																																	

Copyright FCI  
FCI

REV F - 2006 04-11

FDM: Rev:H STATUS Released Printed: Apr 24, 2010