





(2,54mm) .100"

HW SERIES

HW-14-08-G-S-350-SM



HW-20-15-G-D-475-SM



# FLEXIBLE .025" SQ BOARD STACKERS

**Mates with:**  
SSW, SSQ, ESW, ESQ,  
CES, SLW, BSW, BCS,  
SSM, IDSS, IDSD, HLE

## SPECIFICATIONS

For complete specifications and recommended PCB layouts see [www.samtec.com?HW-SM](http://www.samtec.com?HW-SM)

**Insulator Material:**

Top: Natural LCP

Bottom: Black LCP

**Terminal Material:**

Phosphor Bronze

**Plating:**

Au or Sn over

50µ" (1,27µm) Ni

**Current Rating:**

3A @ 80°C ambient

**Operating Temp Range:**

-55°C to +125°C with Gold

-55°C to +105°C with Tin

**RoHS Compliant:**

Yes



**Processing:**

Lead-Free Solderable:





Yes

**SMT Lead Coplanarity:**

(0,15mm) .006" max

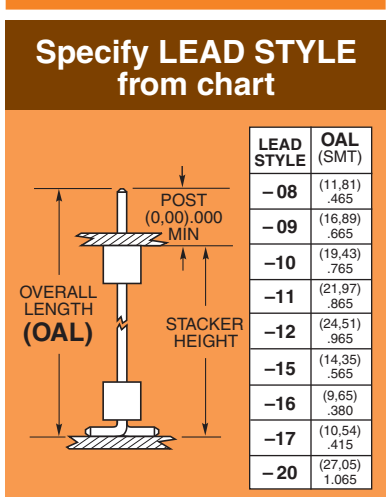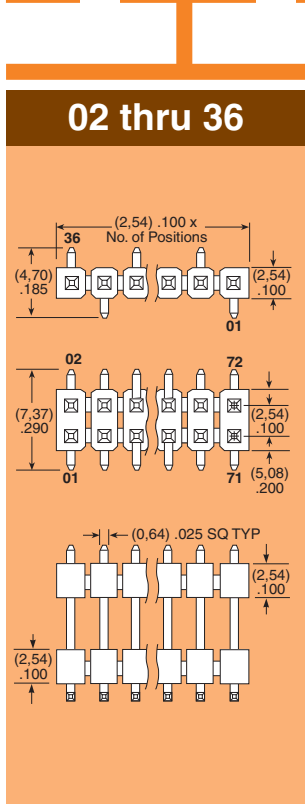

LEAD STYLE	OAL (SMT)
-08	(11,81) .465
-09	(16,89) .665
-10	(19,43) .765
-11	(21,97) .865
-12	(24,51) .965
-15	(14,35) .565
-16	(9,65) .380
-17	(10,54) .415
-20	(27,05) 1.065

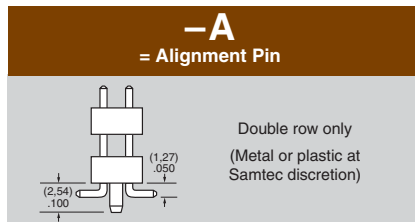

**Note:** Other Gold plating options available. Contact Samtec.

**APPLICATION SPECIFIC OPTION**

Locking Clip (Manual placement required) available with double row -SM. Call Samtec.

**Note:** These Series are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.