


(2,54mm) .100"

TSSH SERIES

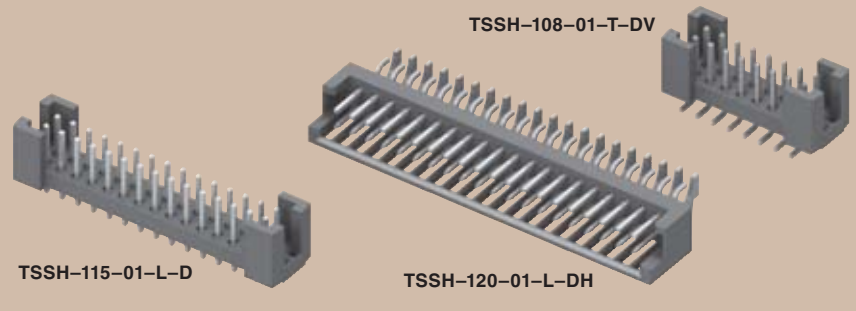

SHROUDED .025" SQ POST HEADERS

Mates with:
SSW, SSQ, SSM

Important Note:
This Series will only mate with SSW, SSQ & SSM Series

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TSSH

Insulator Material: Black Liquid Crystal Polymer

Terminal Material: Phosphor Bronze

Plating: Au or Sn over 50µ" (1,27µm) Ni


Operating Temp Range: -55°C to +105°C with Tin; -55°C to +125°C with Gold

RoHS Compliant: Yes



Processing: Lead-Free Solderable: Yes

SMT Lead Coplanarity: (0,20mm) .008" max (-DH) (0,20mm) .008" max (-DV)

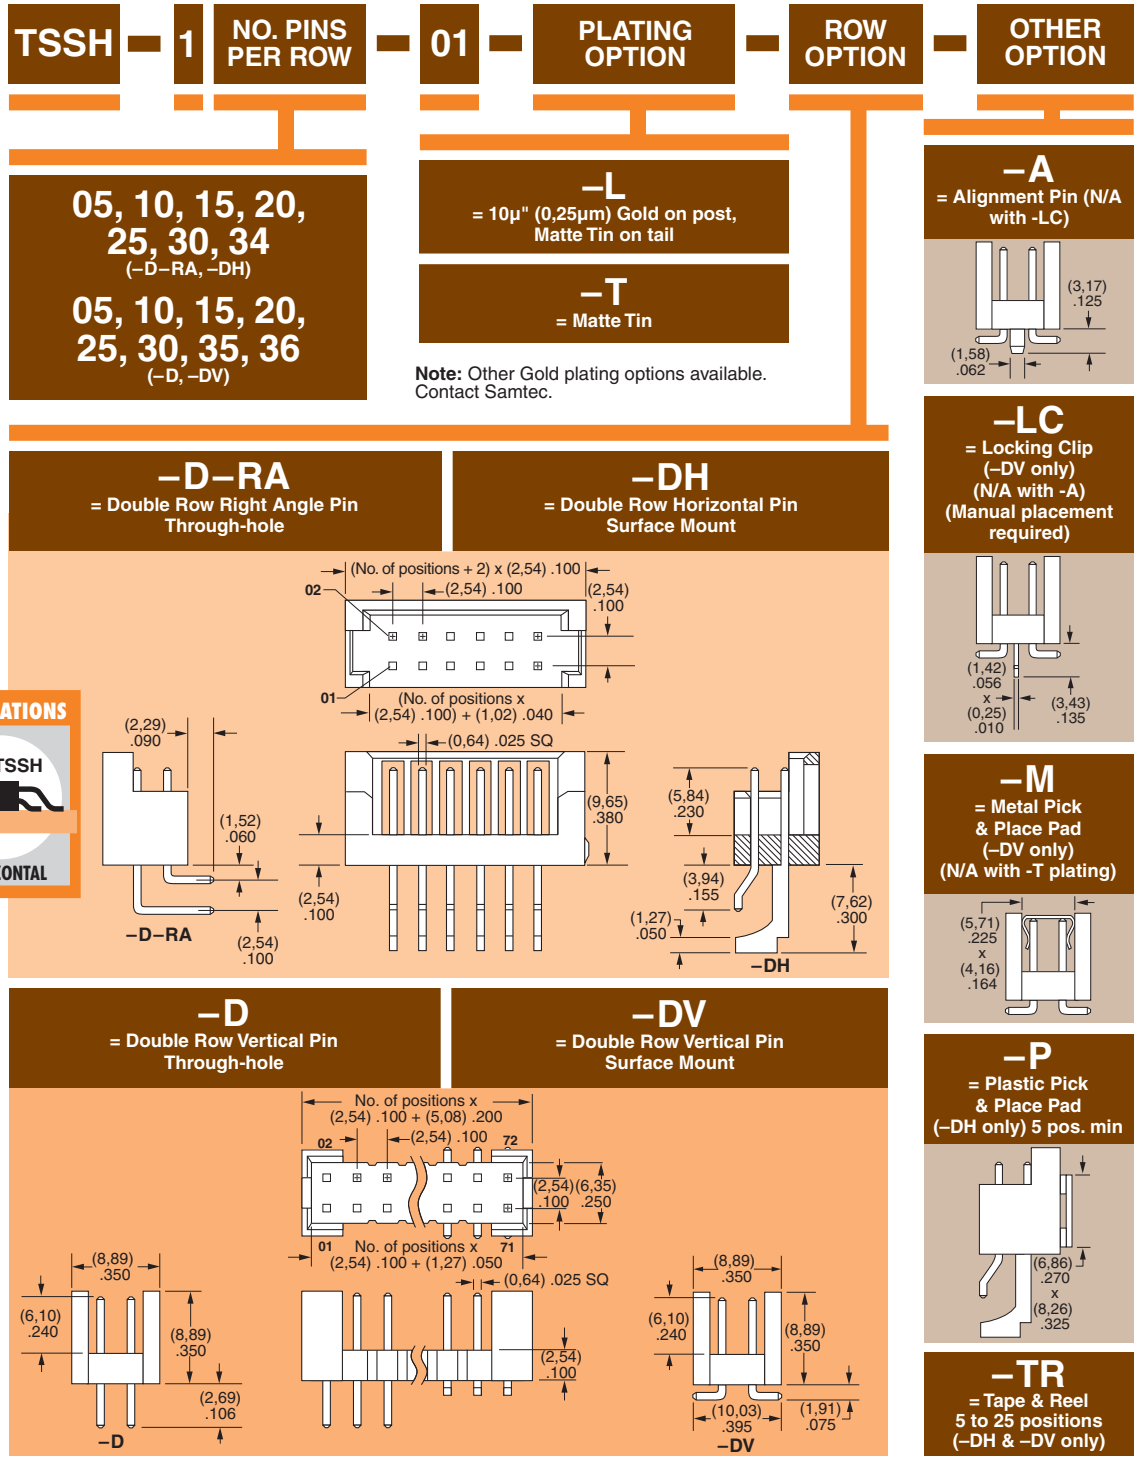

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM