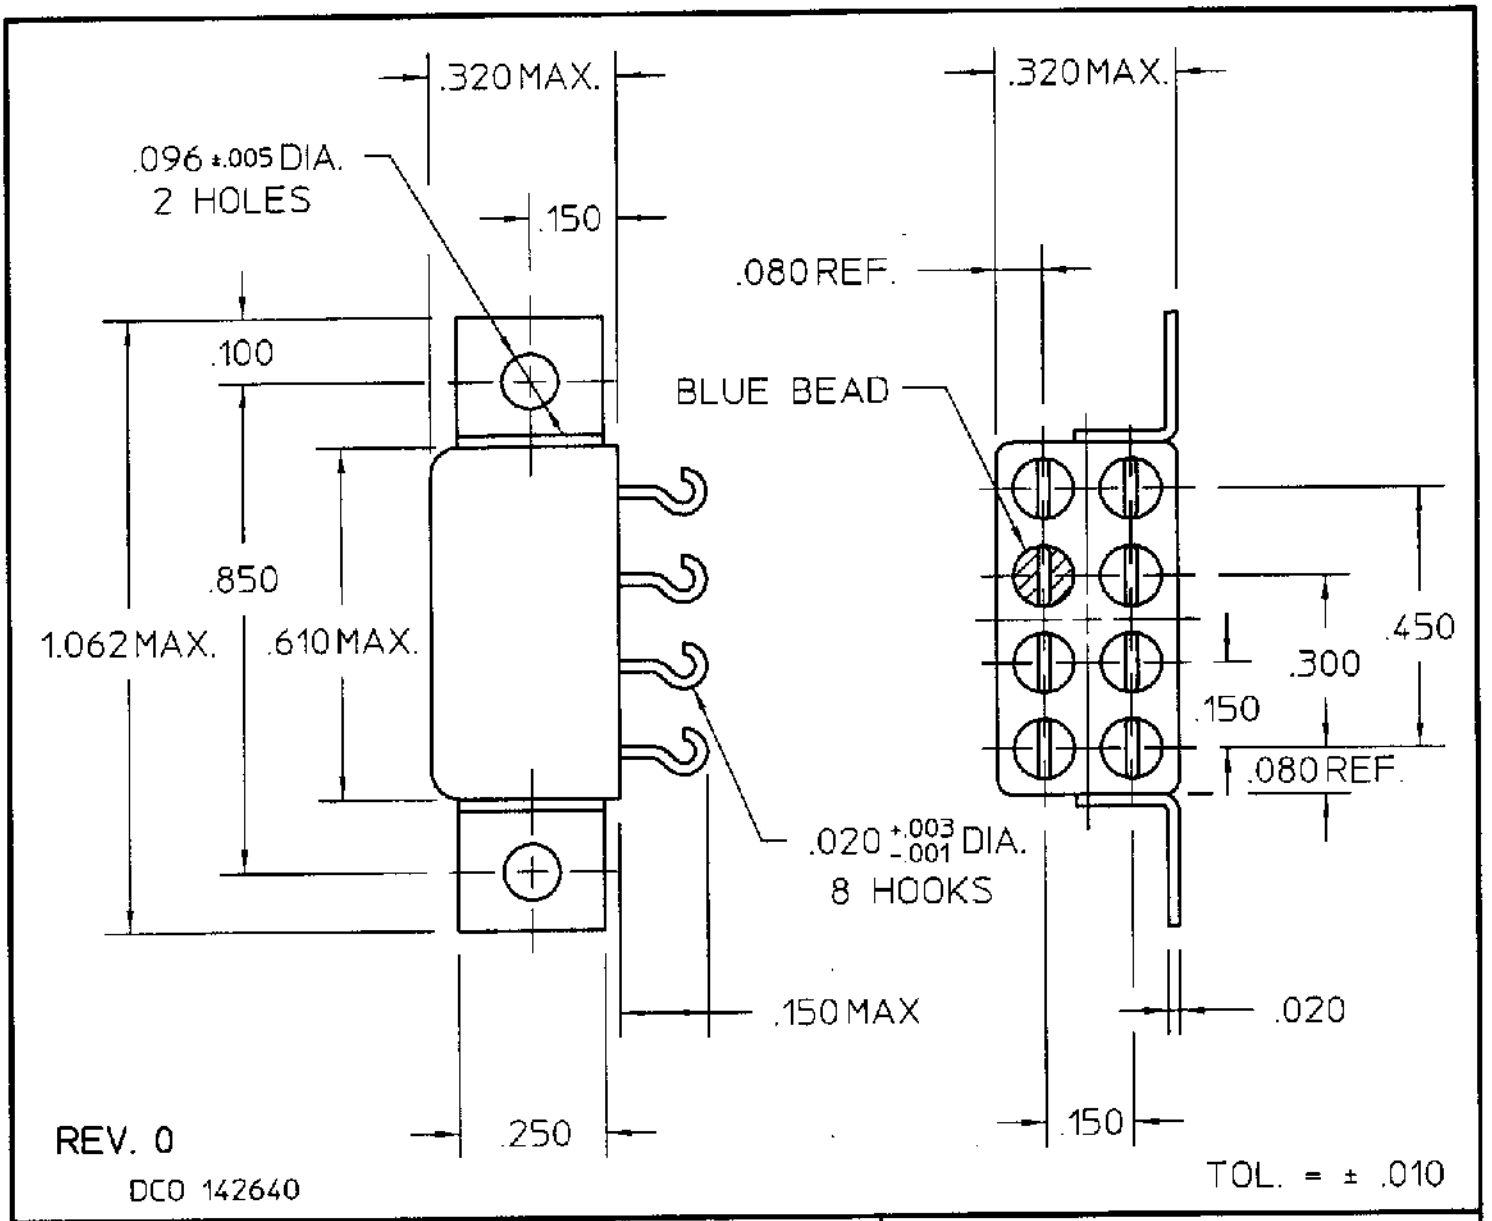

COIL: @ 25°C

RESISTANCE 1350 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
BOUNCE 2 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET

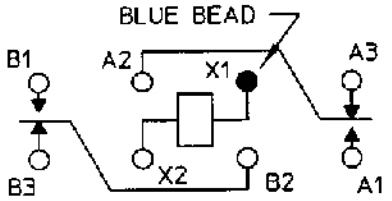

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS 28 VDC RESISTIVE 50,000 OPERATIONS

DR. PBB 1/18/01 CK:

CII Technologies
advanced control electronic solutions

CUST. QPL

CUST. NO. M39016/13-060M REV.

"3SBC" RELAY

3SBC1521A2

F-718 REV. E

Downloaded from Elcodis.com electronic components distributor